



General Catalogue

Contents

BRAND	2
PRO line	12
NEXT line	52
DECO line	134
PANORAMA	170
SPECIFICATIONS	184
INSTALLATION DRAWINGS	224

How a stroke of genius became a love affair.

60 years ago, in a small workshop by the Po river banks in Italy, two brilliant brothers let flow their genius on the waves of passion. Even though they were only in their twenties, the Contini brothers gave shape to their dream: the creation of a revolutionary appliance to cook, integrating the hob and the gas bottle compartment in one single piece, named Mobilfornello, meaning furniture-cooker. This innovation was the flame that fed the fledgling company Tecnogas, when every manufacturer was making basic devices based on single sets of burners. Even if today this may seem obvious, Mobilfornello was the very first device that was a piece of furniture at the same time: the modern cooker. The perfect example of design and functionality harmoniously expressed in a unique device: this is our favorite business card. Based on a true story, integrated with burning passion and shimmering technology.







We don't return to our roots.
We express their values and make them render.

Following our founders' legacy, we still design eye-catching appliances perfect for cooking and still handcraft them in Gualtieri, in the centre of the Emilia Romagna region, the Italian quintessence for three reasons.



Life in the heart of Italian food naturally spreads an inborn passion.

First of all, Emilia Romagna's celebrated cuisine represents the same values of quality raw materials, craftsmanship and care of the details in which we recognize ourselves and on which we base our daily work. Not forgetting that it is a small step from the passion for good cuisine to the art of cooking.



We are used to crafting our dreams.

In this generous land there is another heart beating, a beat that is heard from far away. It is not only a passion, it is a fever that grows with people, frequently providing them with work and sometimes changing their life. Welcome to Motor Valley, land of top mechanical engineering where everybody shows great confidence with gears and steel since childhood. Where you breathe the legend of two and four wheeled Italian dreams. Where dreams are first designed and then crafted.

We evolved beauty into strong designs.

This unique expertise in cooking and engineering is crowned by the extraordinary artistic heritage encased in the Gualtieri village. People here grow up surrounded by masterpiece of fine arts, and this sparks creativity in crafting a plateau of design products, together with another peculiarity of our appliances: their strength.





BRAND

Values inherited from
our homeland become style.

These values become true in three
families of products: PRO, inspired by
professional cooking, NEXT, capturing
our engineering spirit, and DECO, a
contemporary interpretation of '900
Italian art. Three different styles, a
consistent strong and elegant identity.





PRO line





A black built-in oven with its door open, revealing the interior. The oven has a silver control knob on top. Inside, there are two metal racks and a large convection fan on the right side. The oven is set into a dark countertop.

125 lt and 72 lt built-in oven convection
cavities for great multilevel cooking



2





FP2K96M5X

PRO line

Stainless steel

Width 90 cm

2-fan oven

Gas convection oven with electric grill

Cavity volume 125 lt

5 Functions

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan



FP3K96M5X

PRO line

Stainless steel

Width 90 cm

Gas oven with electric grill

Cavity volume 100 lt

5 Functions

Minute minder

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan



Alternative matt



FP2K66E9X

PRO line

Stainless steel

Width 60 cm

Electric multifunction oven

Energy efficiency class A -10%

Cavity volume 65 lt

9 Functions

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses



FP3K66E5X

PRO line

Stainless steel

Width 60 cm

Electric multifunction oven

Energy efficiency class A -10%

Cavity volume 65 lt

5 Functions

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses



FP3K66M3X

PRO line

Stainless steel

Width 60 cm

Gas oven with electric grill

Cavity volume 60 lt

3 Functions

Minute minder

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses



FP3K66G3X

PRO line
Stainless steel
Width 60 cm

Gas oven with gas grill
Cavity volume 60 lt
3 Functions
Minute minder
Easy To Clean (ETC) enamel
Smooth oven interior with easy removable side grids
Cooling fan
Patented cool door with easy removable glasses



PP90GVF5TGX

PRO line

Stainless Steel

Width 90 cm

5 Gas burners

Cast iron pan supports

Electronic one-touch ignition

Safety valves



PP75GVF5TGX

PRO line
Stainless Steel
Width 75 cm
5 Gas burners
Cast iron pan supports
Electronic one-touch ignition
Safety valves



Powerful and flexible worktops
with superior efficiency





STRETCH - PSIX12G6VC

PRO line

Stainless Steel

Width 120 cm

6 Gas brass burners

2 5.0 kW wok burners

Cast iron pan supports

Gas oven with gas grill

Cavity volume 200 lt

2 Functions

Analog thermometer

Patented cool door with easy removable glasses

Tecnogas exclusive





Alternative matt



PIB I2GE5VC

PRO line

Black matt

Width 120 cm

5 Gas brass burners

1 5.0 kW wok burner

Cast iron pan supports

Cast iron electric griddle

Gas convection main oven with gas grill:

Cavity volume 100 lt

3 Functions

Electric auxiliary conventional oven with grill:

Energy efficiency class A

Cavity volume 42 lt

2 Functions

Analog thermometer on main oven

Patented cool door with easy removable glasses

3 Glasses



Alternative matt



PIX I 6G5VC

PRO line

Stainless Steel

Width 100 cm

5 Gas brass burners

1 5.0 kW wok burner

Cast iron pan supports

Gas convection oven with gas grill

Cavity volume 118 lt

3 Functions

Analog thermometer

Patented cool door with easy removable glasses

3 Glasses



Alternative matt



GRAND - PGIC96M5VC

PRO line
 Cream matt
 Width 90 cm
 5 Gas brass burners
 1 5.0 kW wok burner
 Cast iron pan supports
 4-fan oven
 Gas convection oven with electric grill
 Cavity volume 150 lt
 3 Functions
 Analog thermometer
 Patented cool door with easy removable glasses

Tecnogas exclusive





Alternative matt



PIR96MM5VC

PRO line

Red matt

Width 90 cm

5 Gas brass burners

1 5.0 kW wok burner

Cast iron pan supports

Gas convection main oven with electric grill:

Cavity volume 65 lt

5 Functions

Gas auxiliary oven with electric grill:

Cavity volume 42 lt

2 Functions

Analog thermometer on main oven

Patented cool door with easy removable glasses

3 Glasses



Alternative matt



PIG96G5VC

PRO line

Green matt

Width 90 cm

5 Gas brass burners

1 5.0 kW wok burner

Cast iron pan supports

Gas convection oven with gas grill

Cavity volume 118 lt

3 Functions

Analog thermometer

Patented cool door with easy removable glasses

3 Glasses



Made to last: special threaded
scratchproof stainless steel





Alternative matt



P2B96E5VC

PRO line

Black matt

Width 90 cm

5 Gas burners

1 5.0 kW wok burner

Cast iron pan supports

Electric multifunction oven

Energy efficiency class A

Cavity volume 110 lt

8 Functions

Analog clock

Patented cool door with easy
removable glasses



PATTERN - PP3X96G5VC

PRO line

Stainless steel

Width 90 cm

5 Gas brass burners

1 5.0 kW wok burner

Cast iron pan supports

Gas oven with gas grill

Cavity volume 118 lt

2 Functions

Minute minder 60'

Patented cool door with easy removable glasses

Tecnogas exclusive





Alternative color



P3X96G5VE

PRO line

Stainless steel

Width 90 cm

5 Gas burners

Enamelled pan supports

Gas oven with gas grill

Cavity volume 118 lt

2 Functions

Minute minder 60'

Patented cool door with easy removable glasses



PIX86E5VC

PRO line
Stainless steel
Width 80 cm
5 Gas burners
Cast iron pan supports

Electric multifunction oven
Energy efficiency class A
Cavity volume 110 lt
8 Functions
Analog thermometer
Patented cool door with easy removable glasses
3 Glasses



Alternative matt



P2C85M5VE

PRO line

Cream matt

Width 80 cm

5 Gas burners

Enamelled pan supports

Gas oven with electric grill

Cavity volume 96 lt

2 Functions

Analog clock

Patented cool door with easy removable glasses



Alternative color



P3X85G5VE

PRO line

Stainless steel

Width 80 cm

5 Gas burners

Enamelled pan supports

Gas oven with gas grill

Cavity volume 96 lt

2 Functions

Minute minder 60'

Patented cool door with easy removable glasses



PIX76E5VC

PRO line

Stainless steel

Width 70 cm

5 Gas burners

Cast iron pan supports

Electric multifunction oven

Energy efficiency class A

Cavity volume 65 lt

8 Functions

Analog thermometer

Patented cool door with easy removable glasses

3 Glasses



Alternative matt



PIR66M4VC

PRO line

Red matt

Width 60 cm

4 Gas burners

Cast iron pan supports

Gas convection oven with electric grill

Cavity volume 65 lt

5 Functions

Analog thermometer

Patented cool door with easy removable glasses

3 Glasses



P2X66E4VC

PRO line

Stainless steel

Width 60 cm

4 Gas burners

Cast iron pan supports

Electric multifunction oven

Energy efficiency class A

Cavity volume 65 lt

8 Functions

Analog clock

Patented cool door with easy removable glasses



Alternative color



P3X66G4VE

PRO line

Stainless steel

Width 60 cm

4 Gas burners

Enamelled pan supports


Gas oven with gas grill

Cavity volume 65 lt

2 Functions

Minute minder 60'

Patented cool door with easy removable glasses

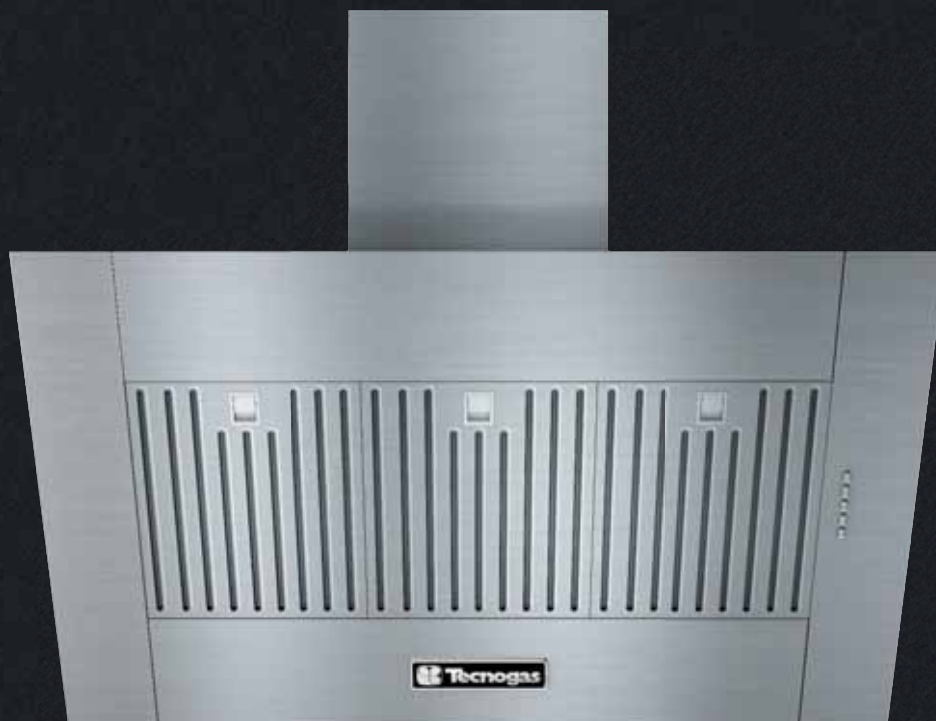

CP I 90X

PRO line

Stainless steel

Width 90 cm

Wall mount installation

Extraction hood

Stainless steel baffle filters

Maximum aspiration capacity: 850m³/h

Electronic control buttons

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Timer



CPI 60X

PRO line
Stainless steel
Width 60 cm
Wall mount installation
Extraction hood
Stainless steel baffle filters
Maximum aspiration capacity: 850m³/h
Electronic control buttons
4 speed settings
Halogen lights
Noise level: 30 dB min / 58 dB max
Timer



CP212X

PRO line

Stainless steel

Width 120 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Electronic control buttons

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Timer



CP290X

PRO line

Stainless steel

Width 90 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Electronic control buttons

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Timer



CP260X

PRO line

Stainless steel

Width 60 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Electronic control buttons

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Timer



Alternative matt



CP3 I2X

PRO line
Stainless steel
Width 120 cm
Wall mount installation
Extraction hood
Stainless steel mesh filters
Maximum aspiration capacity: 850m³/h
Electronic control buttons
4 speed settings
Halogen lights
Noise level: 30 dB min / 58 dB max
Timer



Alternative matt



CP390R

PRO line

Red matt

Width 90 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Electronic control buttons

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Timer



Alternative matt



CP360C

PRO line

Cream matt

Width 60 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Electronic control buttons


4 speed settings


Halogen lights

Noise level: 30 dB min / 58 dB max

Timer

NEXT line

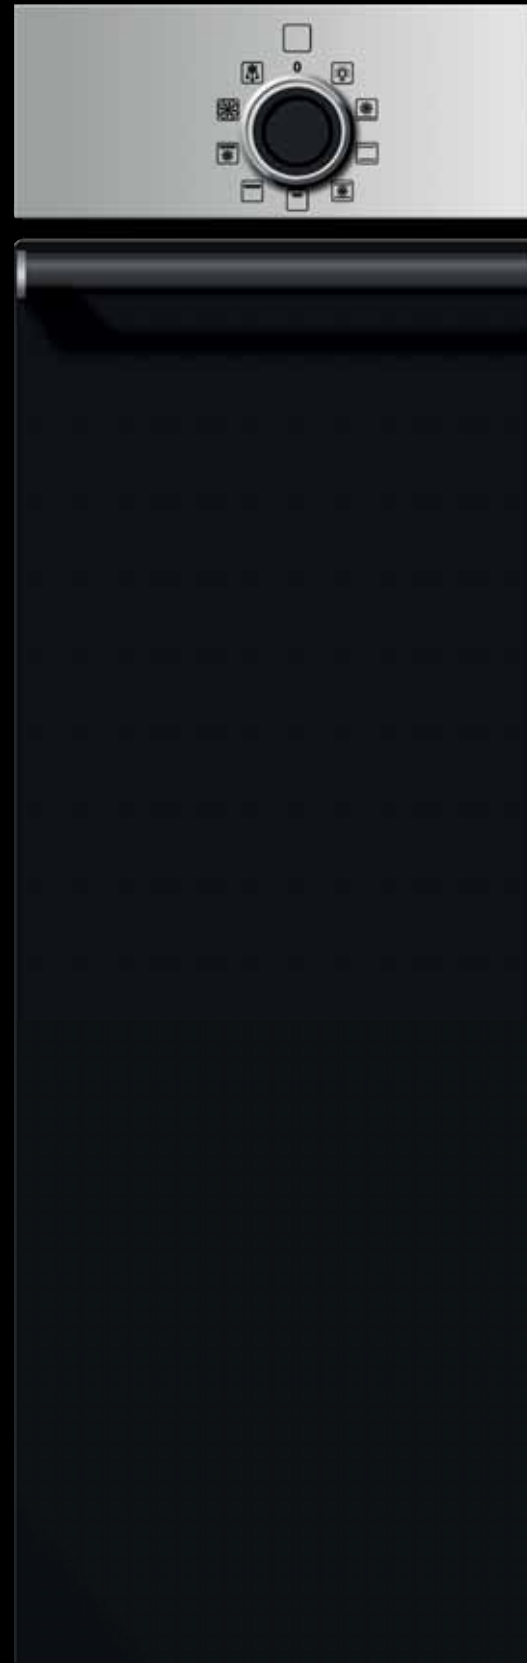

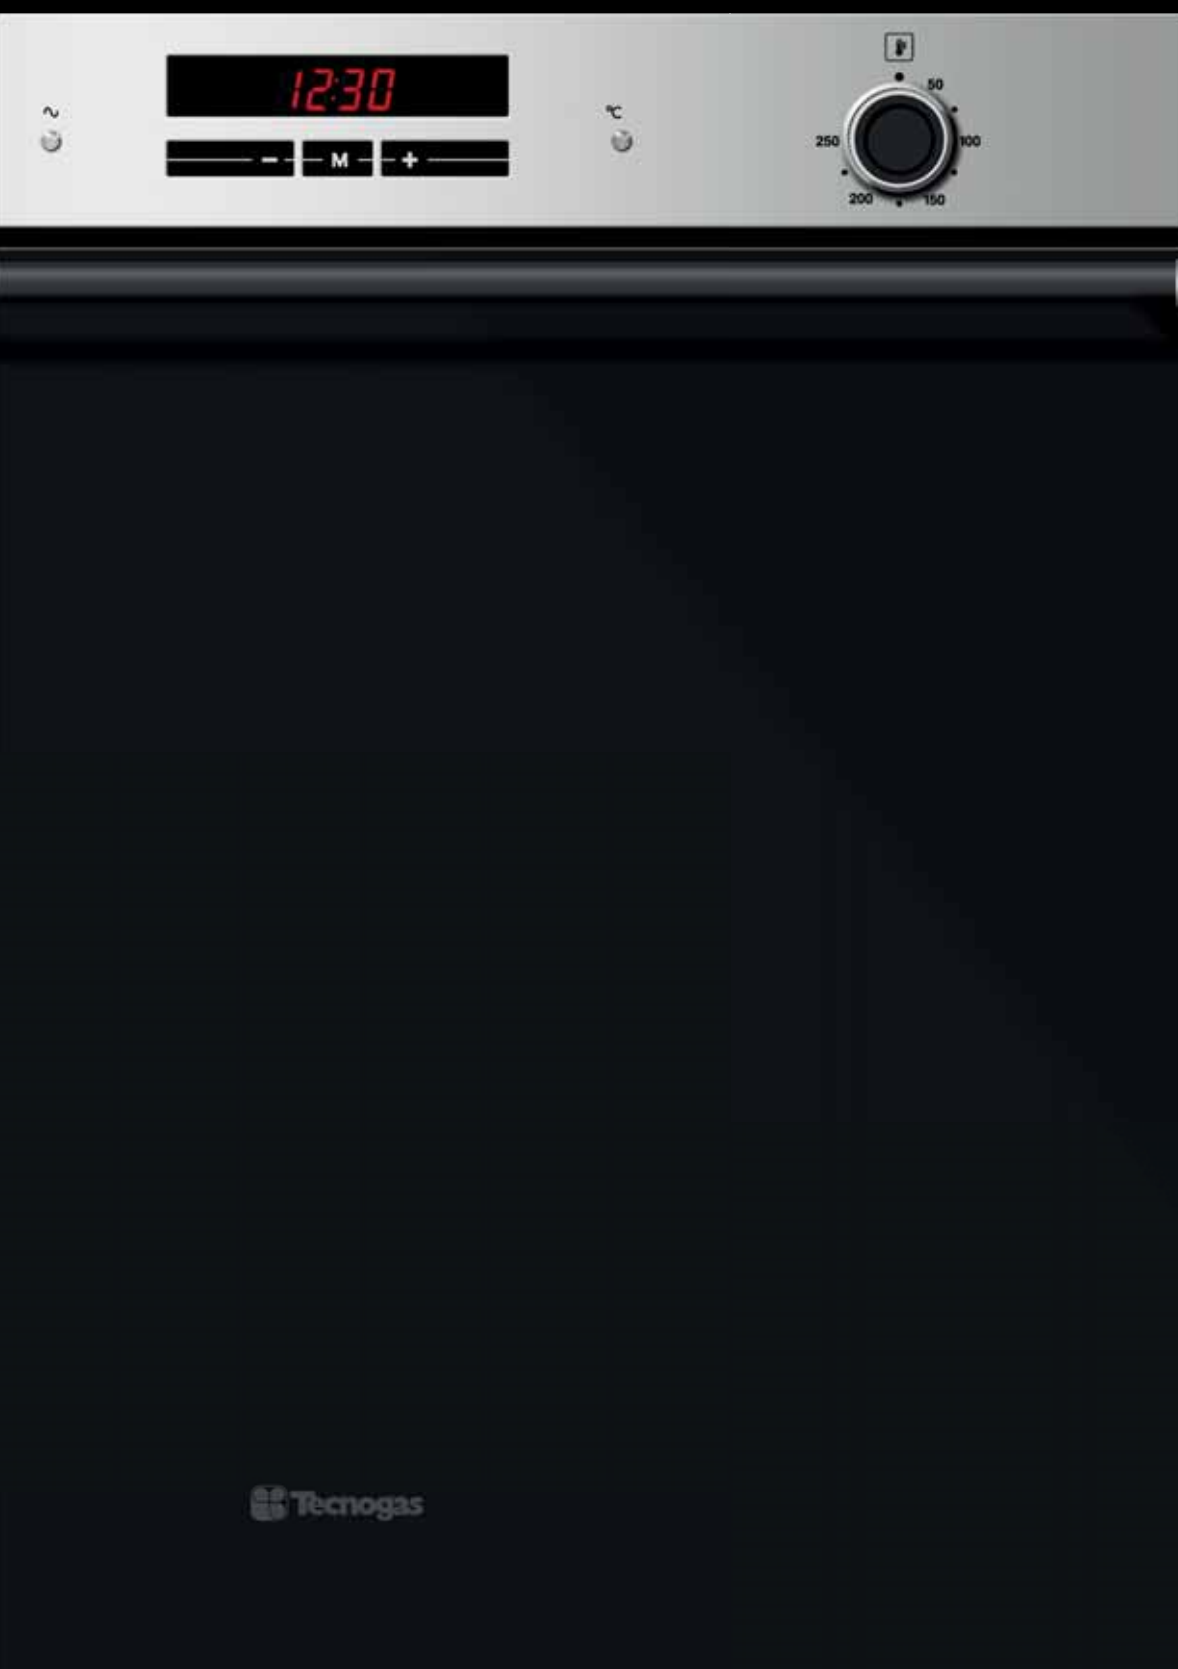



Machines designed with strong yet elegant style and absolute care for every detail





FN2K96G5X

NEXT line

Stainless steel

Width 90 cm

2-fan oven

Gas convection oven with gas grill

Cavity volume 125 lt

5 Functions

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan



FN2K96E9X

NEXT line

Stainless steel

Width 90 cm

2-fan oven

Electric multifunction oven

Energy efficiency class A

Cavity volume 125 lt

9 Functions

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan



FN3K96G5X

NEXT line

Stainless steel

Width 90 cm

Gas oven with gas grill

Cavity volume 100 lt

5 Functions

Minute minder

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan



FN2K94E9X

NEXT line

Stainless steel

Width 90 cm

Electric multifunction oven

Energy efficiency class A

Cavity volume 100 lt

9 Functions


Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses

3 glasses

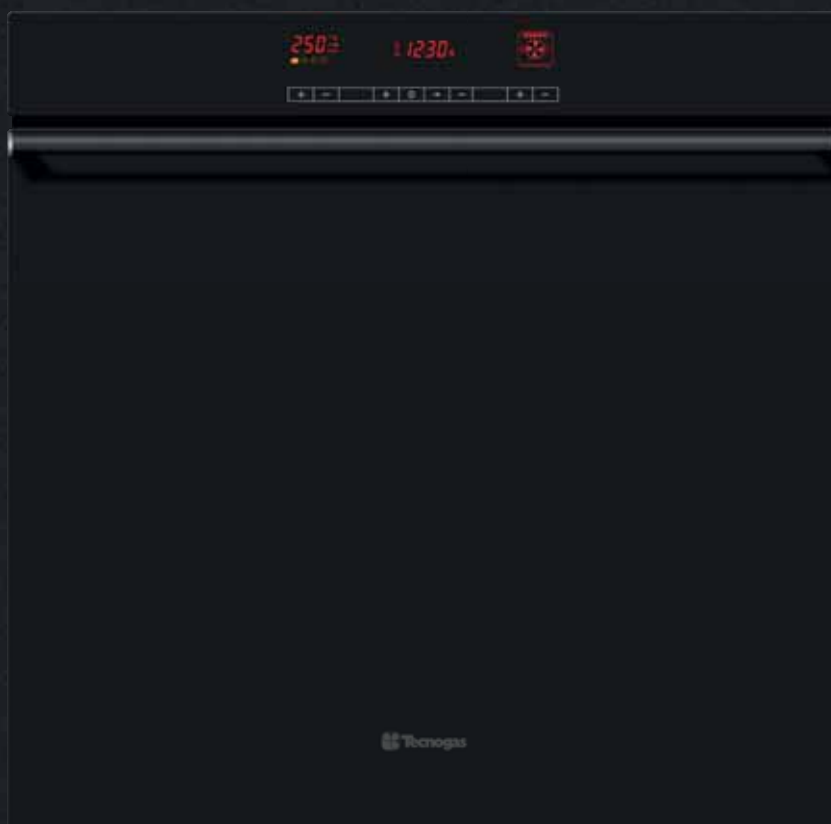

FN0K66E I I B7

NEXT line

Black glossy

Width 60 cm

Electronic touch control multifunction oven

Energy efficiency class A -20%

Cavity volume 72 lt

11 Functions

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses

3 Glasses



Alternative color



FN2K66E9X7

NEXT line

Stainless steel

Width 60 cm

Electric multifunction oven

Energy efficiency class A -20%

Cavity volume 72 lt

9 Functions

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses

3 Glasses



Alternative color



FN2K66M3B7

NEXT line

Black glossy

Width 60 cm

Gas convection oven with electric grill

Cavity volume 72 lt

3 Functions

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses

3 Glasses



Alternative color



FN3K66E5X7

NEXT line

Stainless steel

Width 60 cm

Electric multifunction oven

Energy efficiency class A -20%

Cavity volume 72 lt

5 Functions

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses



Alternative color



FN2K66E9X6

NEXT line

Stainless steel

Width 60 cm

Electric multifunction oven

Energy efficiency class A -10%

Cavity volume 65 lt

9 Functions

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses



Alternative color



FN3K66E5B6

NEXT line

Black glossy

Width 60 cm

Electric multifunction oven

Energy efficiency class A -10%

Cavity volume 65 lt

5 Functions

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses



Alternative color



FN2K46E5X

NEXT line

Stainless steel

Width 45 cm

Electric multifunction oven

Energy efficiency class A

Cavity volume 40 lt

5 Functions

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses



FN3K46M3X

NEXT line

Stainless steel

Width 45 cm

Gas oven with electric grill

Cavity volume 40 lt

3 Functions

Minute minder

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses

HIGH END SOUS VIDE


A high end restaurant in your home kitchen.

Vacum Packer, Steam Oven and Blast Chiller by Tecnogas are the perfect set to perform the Sous-Vide method at home, as is done in many high end restaurants. With Sous Vide, cooking is slow and freezing is fast. First, vacuum pack your fresh food in special bags and cook it in the Steam Oven. Steaming vacuum-packed foods optimizes flavors and aromas, and “cooking” will be very even throughout the food regardless the size of the item and the skill and the attention of the cook. Meat will keep its tenderness and will never be overcooked; vegetables will stay naturally crispy. After cooking, put your packed food in the Blast Chiller to drop the temperature, and preserve it for later use. Blast chilled food can be regenerated any time by re-heating, to get exactly the same taste and freshness as when just cooked.







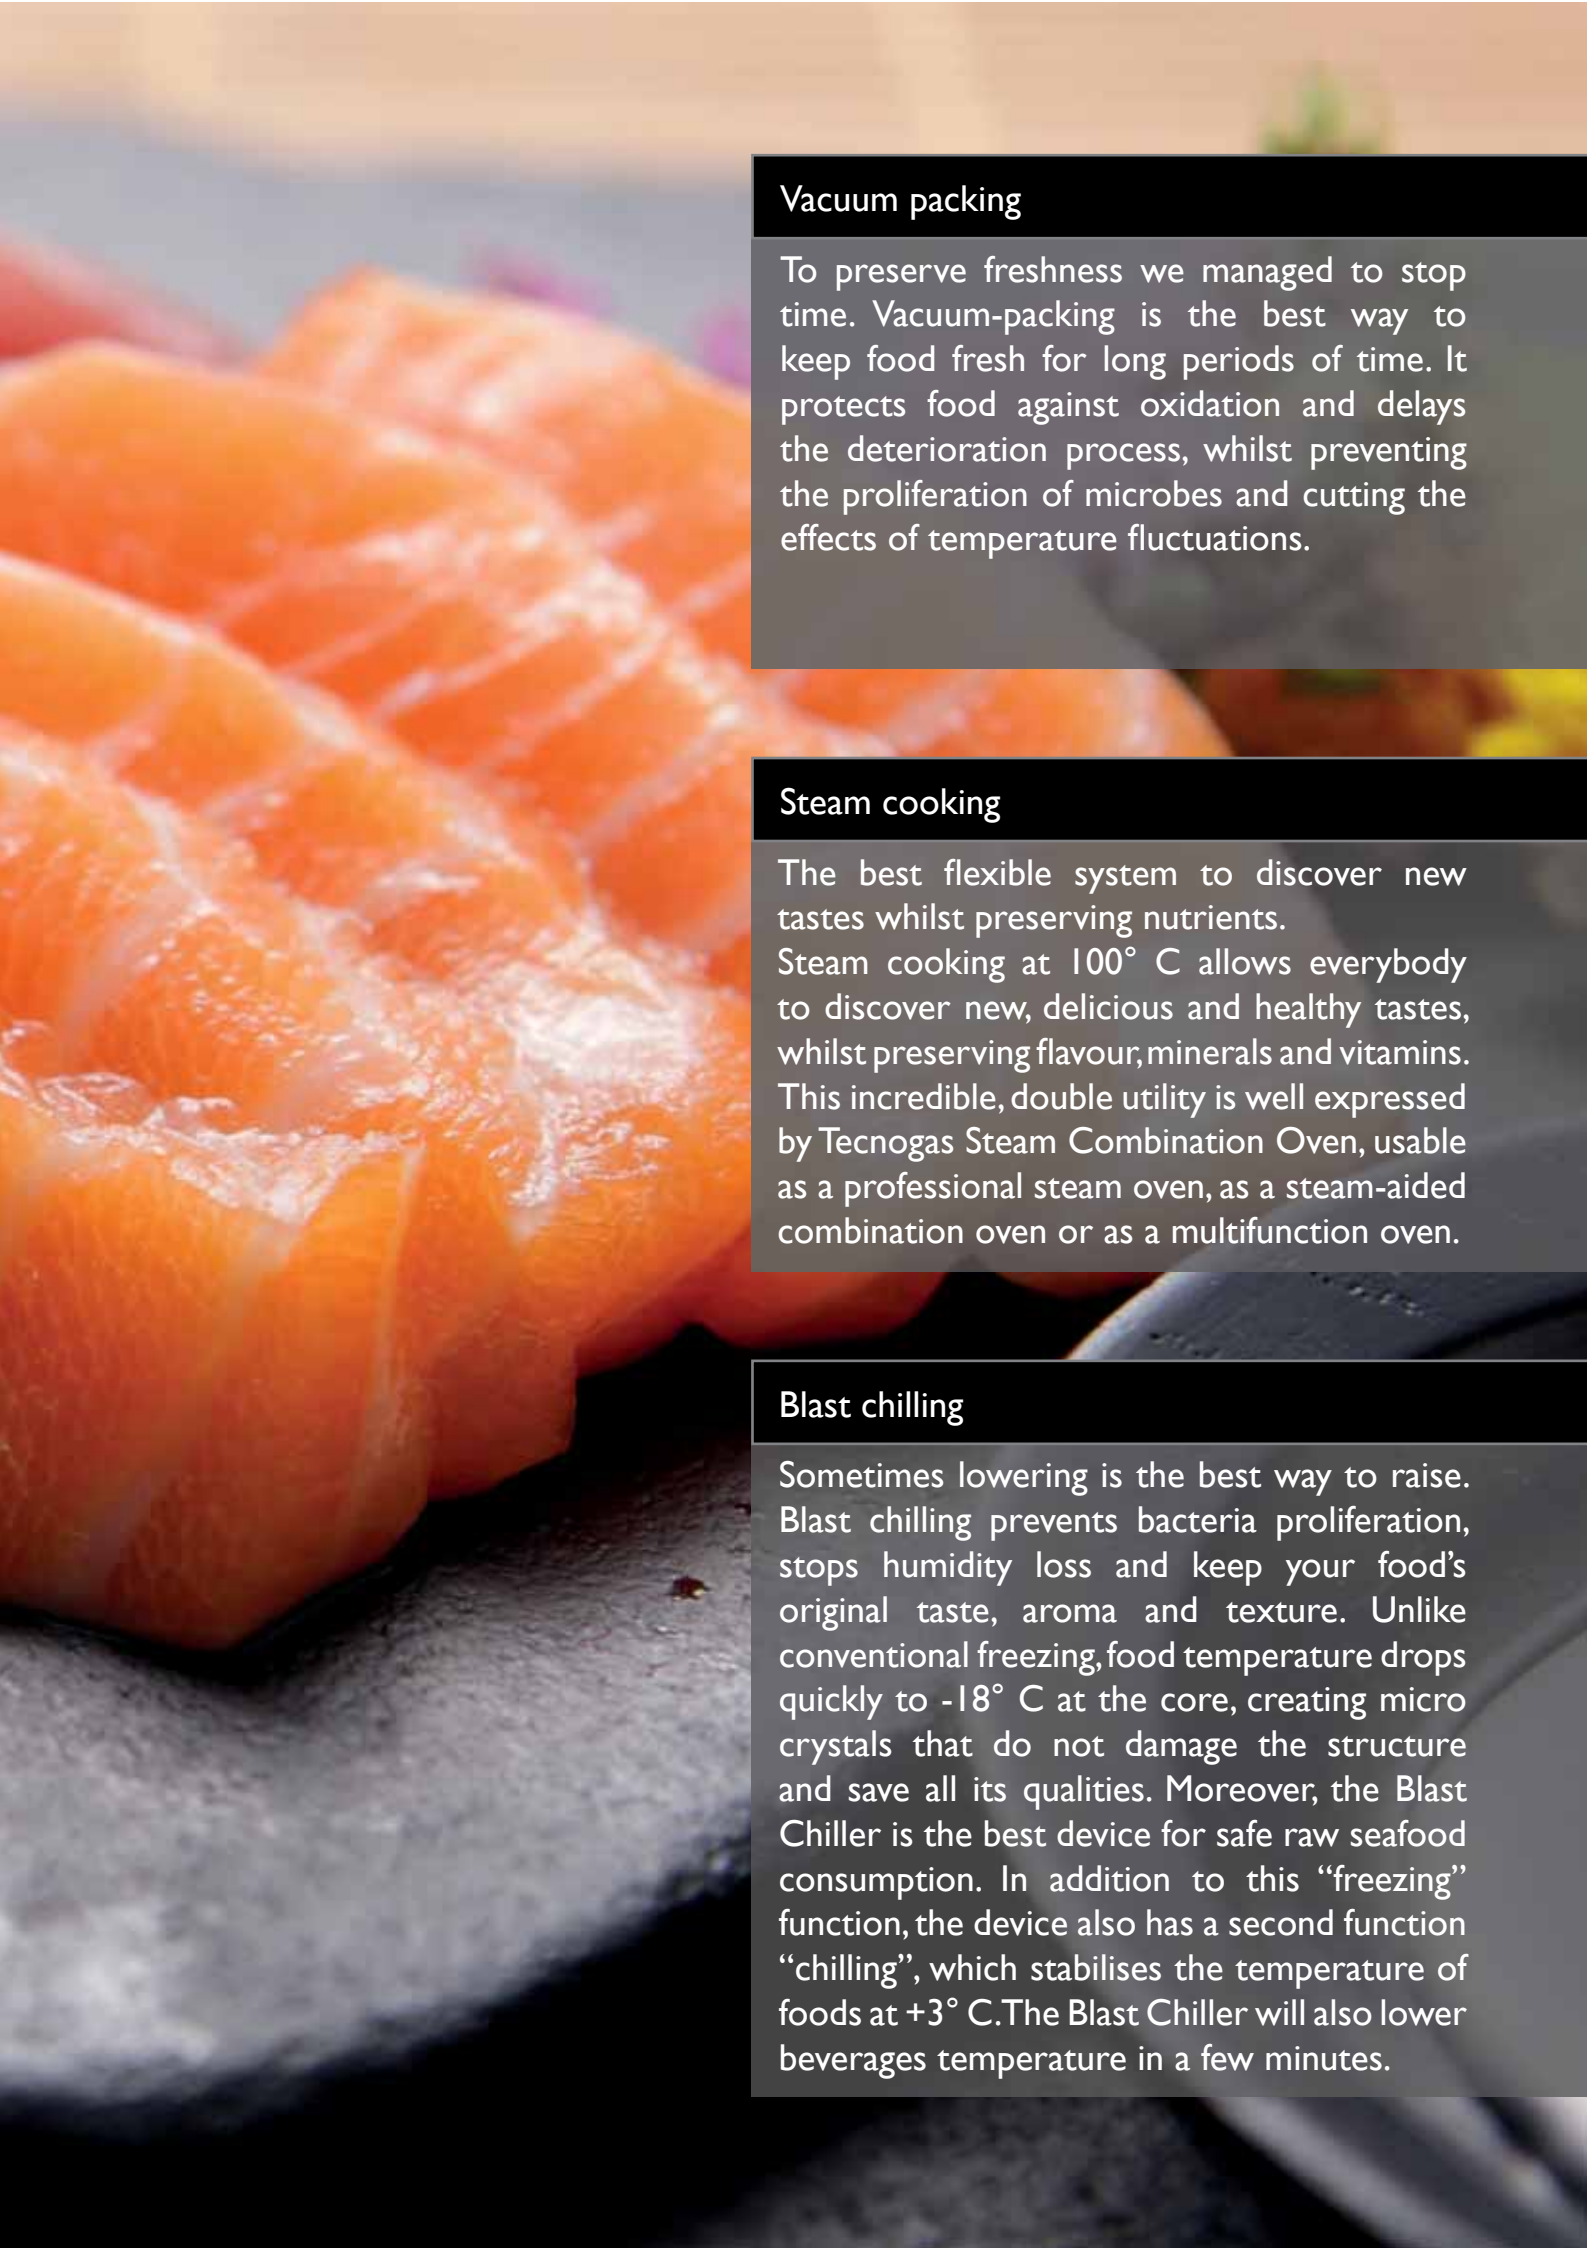

Vacuum packing


To preserve freshness we managed to stop time. Vacuum-packing is the best way to keep food fresh for long periods of time. It protects food against oxidation and delays the deterioration process, whilst preventing the proliferation of microbes and cutting the effects of temperature fluctuations.

Steam cooking

The best flexible system to discover new tastes whilst preserving nutrients. Steam cooking at 100° C allows everybody to discover new, delicious and healthy tastes, whilst preserving flavour, minerals and vitamins. This incredible, double utility is well expressed by Tecnogas Steam Combination Oven, usable as a professional steam oven, as a steam-aided combination oven or as a multifunction oven.

Blast chilling

Sometimes lowering is the best way to raise. Blast chilling prevents bacteria proliferation, stops humidity loss and keep your food's original taste, aroma and texture. Unlike conventional freezing, food temperature drops quickly to -18° C at the core, creating micro crystals that do not damage the structure and save all its qualities. Moreover, the Blast Chiller is the best device for safe raw seafood consumption. In addition to this "freezing" function, the device also has a second function "chilling", which stabilises the temperature of foods at +3° C. The Blast Chiller will also lower beverages temperature in a few minutes.

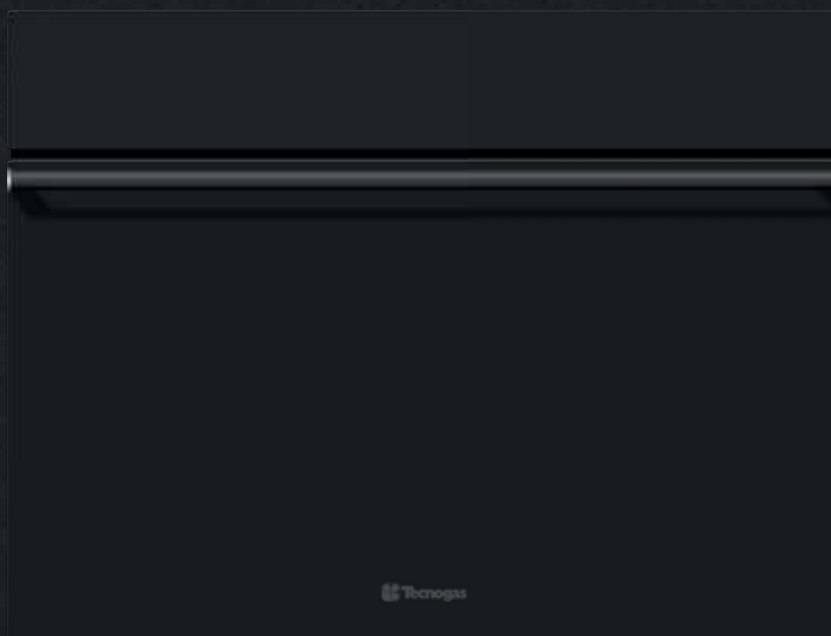

VACUUM PACKER - VN0K64B

NEXT line

Black glossy

Width 60 cm

Touch control

Vacuum efficiency 99%

3 Programs

Food conservation program

Food cooking program

Jar vacuum program




STEAM COMBINATION OVEN - FN0K64S6B

NEXT line
Black glossy
Width 60 cm

Energy efficiency class A
Touch control
Stainless steel oven cavity
Steam cooking
Hot air cooking
Combi hot air+steam cooking
50 preset cooking recipes
10 programmable cooking recipes
Low temperature cooking

Regeneration program
Self cleaning program
Meat probe
3 glasses

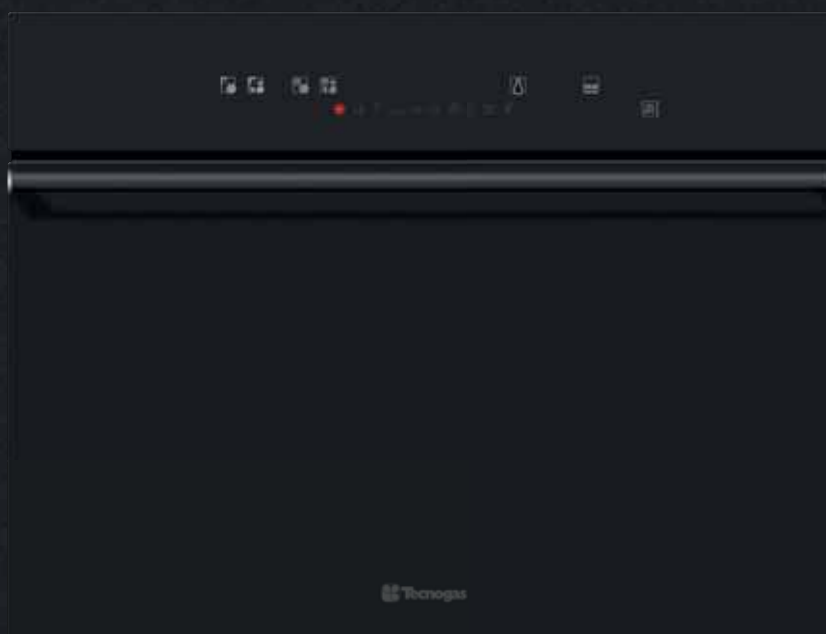

BLAST CHILLER - BN0K64B

NEXT line

Black glossy

Width 60 cm

Touch control

Stainless steel cavity

+ 3° C positive blast

- 18° C negative blast

3 Blast power levels

Precision probe

Bottle special program

Timer



STEAM OVEN - FN2K64S2B

NEXT line

Black glossy

Width 60 cm

Steam oven with grill

Energy efficiency class A

Stainless steel oven cavity

Steam cooking

Electric grill

Touch control programmer

Smooth oven interior with easy removable side grids

Cooling fan



COFFEE MACHINE - CN0K64B

NEXT line

Black glossy

Width 60 cm

Touch control

Brass coffee preparation system

Adjustable grain thickness


Steam boiler

Single or double coffee supply selection

Strong or weak coffee supply selection

Adjustable coffee dispenser

Water filter

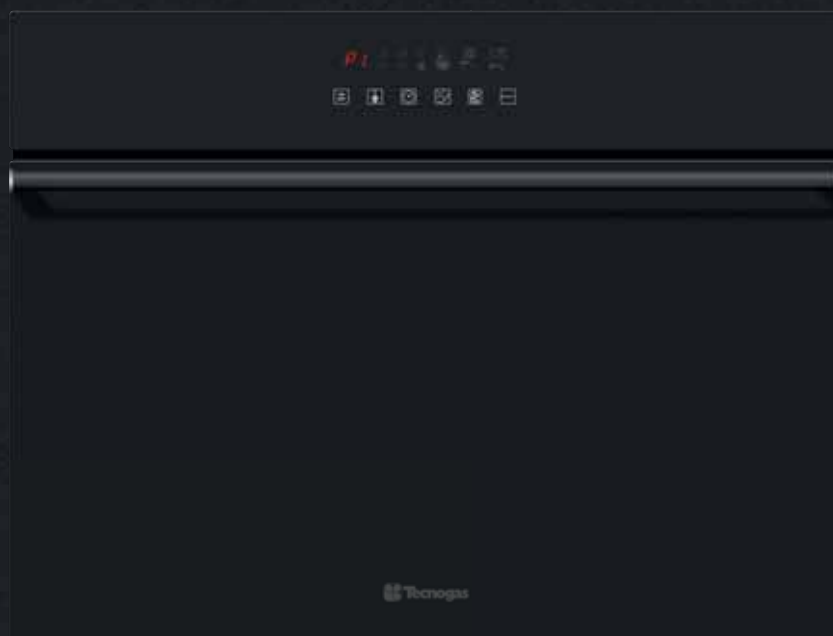


DISHWASHER - DN0K64B

NEXT line
Black glossy
Width 60 cm

Touch control
Stainless steel cavity
Stainless steel door interior
Energy efficiency class A
Washing performance class A
Drying performance class A
5 programs
6 place settings
Delayed start

Grey baskets
Cutlery basket
Maximum dish diameter 29 cm
3 in 1 program
Extra rinse program

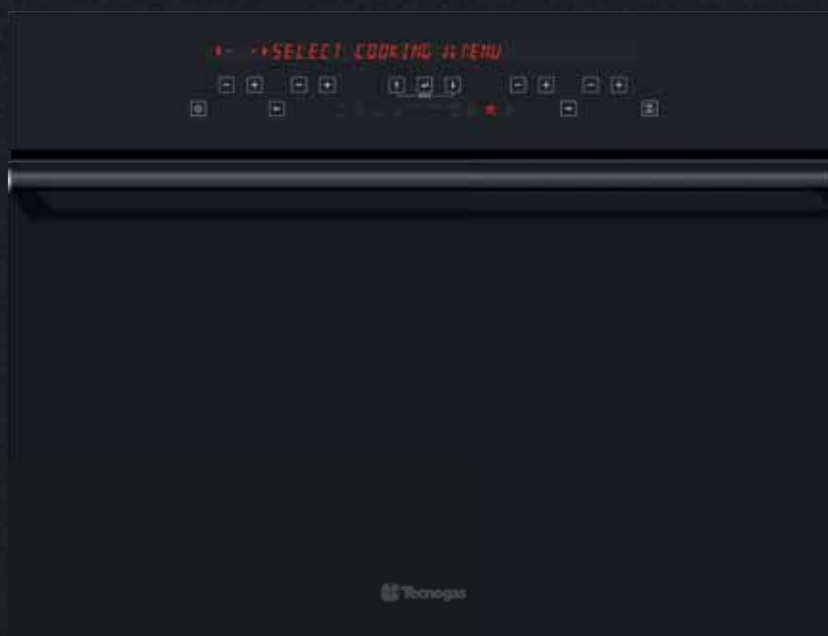

MULTIFUNCTION OVEN - FN0K64R10B

NEXT line

Black glossy

Width 60 cm

Energy efficiency class A

10 Functions

50 preset cooking recipes

10 programmable cooking recipes

Easy To Clean (ETC) enamel

Smooth oven interior with

easy removable side grids

Cooling fan

Patented cool door with easy removable glasses

3 Glasses



MULTIFUNCTION OVEN - FN0K64E10B

NEXT line

Black glossy

Width 60 cm

Energy efficiency class A

10 Functions


Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses

3 Glasses

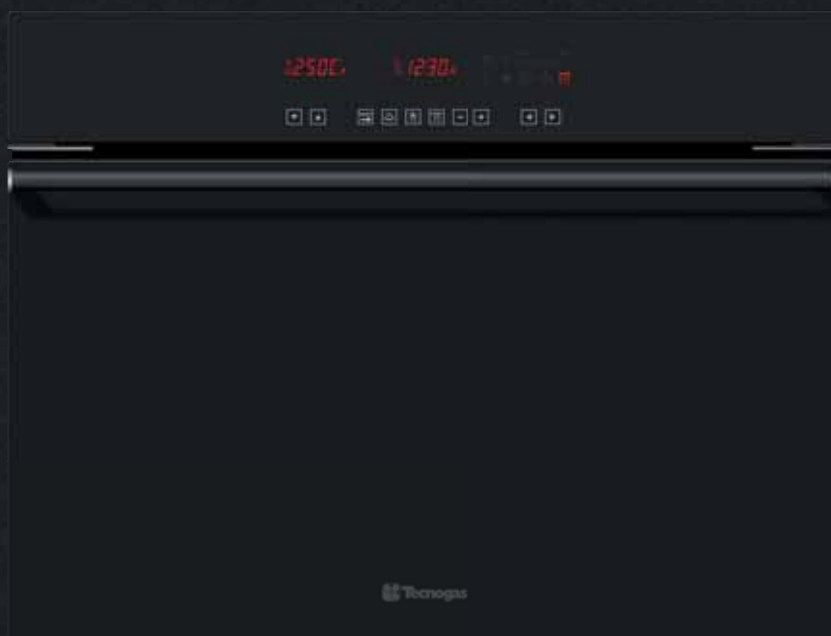

PYROLYTIC OVEN - FN0K64P10B

NEXT line

Black glossy

Width 60 cm

Electronic touch control pyrolytic oven

Energy efficiency class A

10 Functions

Full cleaning cycle - 180'

Full cleaning cycle - 90'

Automatic safety door lock

Pyrolytic cavity enamel

Smooth oven interior with
easy removable side grids

Cooling fan

Patented cool door with easy removable glasses

4 Glasses



MICROWAVE COMBINATION OVEN - MN0K64B

NEXT line
Black glossy
Width 60 cm

Touch control
Cavity volume 38 lt
Stainless steel oven cavity
Microwave cooking
Electric grill cooking
Combi microwave+grill cooking
Grill+fan cooking
Automatic defrost
Automatic cooking menu

Digital timer
Glass rotating plate
3 glasses



Alternative color



MN0K63B

NEXT line
Black glossy
Width 60 cm

Microwave combination oven
Digital control
Stainless steel oven cavity
Push button door opening
Cavity volume 25 lt
Microwave cooking
Electric grill cooking
Combi microwave+grill cooking
Quick start

Auto cooking menu
Digital timer
Glass rotating plate



WARMING DRAWER - WDN12B

NEXT line

Black glossy

Width 60 cm

Telescopic rails opening

Maximum load 25 kG

Temperature range 30-85 °C

Control light

Anti slip mat

Maximum power 450 W

8 kW and 5 kW brass burners for superior flame control and maximum durability







PN90GVF5LBX

NEXT line

Stainless Steel

Width 90 cm

5 Gas brass burners

1 5.0 kW wok burner

Cast iron pan supports

Electronic one-touch ignition

Safety valves



PN90GVF3LBX

NEXT line

Stainless Steel

Width 90 cm

3 Gas brass burners

2 5.0 kW wok burners

Cast iron pan supports

Electronic one-touch ignition

Safety valves



PN90GVF5TGX

NEXT line

Stainless Steel

Width 90 cm

5 Gas burners

Cast iron pan supports

Electronic one-touch ignition

Safety valves



PN90IT5B

NEXT line

Black glossy

Width 90 cm

5 Electric induction zones

9 Power levels

Touch control

Turbo boost

Timer



PN75GVF5LBX

NEXT line

Stainless Steel

Width 75 cm

5 Gas brass burners

1 5.0 kW wok burner

Cast iron pan supports

Electronic one-touch ignition

Safety valves



PN75GVF2LBX

NEXT line

Stainless Steel

Width 75 cm

2 Gas brass burners

2 5.0 kW wok burners

Cast iron pan supports

Electronic one-touch ignition

Safety valves



PN75GVF5TGX

NEXT line
Stainless Steel
Width 75 cm
5 Gas burners
Cast iron pan supports
Electronic one-touch ignition
Safety valves



PN75IT4B

NEXT line

Black glossy

Width 75 cm

4 Electric induction zones

9 Power levels

Touch control

Turbo boost

Timer



PN60GVF4FBX

NEXT line

Stainless Steel

Width 60 cm

4 Gas brass burners

1 5.0 kW wok burner

Cast iron pan supports

Electronic one-touch ignition

Safety valves



PN60GVF4FGX

NEXT line

Stainless Steel

Width 60 cm

4 Gas burners

Cast iron pan supports

Electronic one-touch ignition

Safety valves



PN60IT4B

NEXT line

Black glossy

Width 60 cm

4 Electric induction zones

9 Power levels

Touch control

Turbo boost

Timer



PN45GVF3LGX

NEXT line

Stainless Steel

Width 45 cm

3 Gas burners

Cast iron pan supports

Electronic one-touch ignition

Safety valves



PN45GVF3GB

NEXT line

Black glossy

Width 45 cm

3 Gas burners

Cast iron pan supports

Electronic one-touch ignition

Safety valves



PN38GVFIT8BB

NEXT line

Black glossy

Width 38 cm

1 Gas brass burner


8.0 kW wok burner

Cast iron pan supports

Electronic one-touch ignition

Safety valves

Tecnogas exclusive

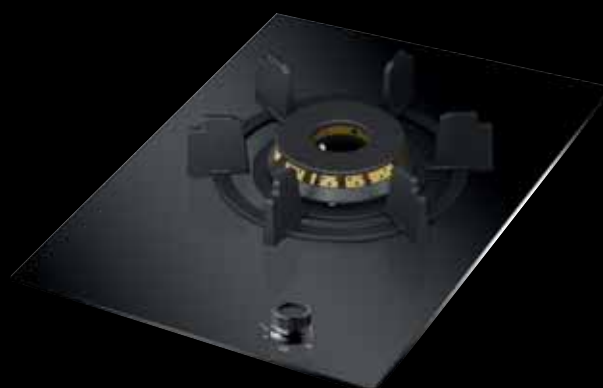



PN38GVF2BB

NEXT line

Black glossy

Width 38 cm

2 Gas brass burners

Cast iron pan supports

Electronic one-touch ignition

Safety valves



PN38IS2B

NEXT line

Black glossy

Width 38 cm

2 Electric induction zones

9 Power levels

Touch control

Turbo boost

Bridge function

Timer



PN38TB

NEXT line

Black glossy

Width 38 cm

9 Power levels

Stainless steel teppan yaki surface



PN38WB

NEXT line

Black glossy

Width 40 cm

1 Electric induction zone

9 Power levels

Turbo boost

Timer

Wok cooking area: Ø 30 cm



PN34GVFI GB

NEXT line

Black glossy

Width 34 cm

I Gas burner

Cast iron pan supports

Electronic one-touch ignition

Safety valves



PN34GVF2GB

NEXT line

Black glossy

Width 34 cm

2 Gas burners

Cast iron pan supports

Electronic one-touch ignition

Safety valves



PN34IT2B

NEXT line

Black glossy

Width 34 cm

2 Electric induction zones

9 Power levels

Touch control

Timer



PN34FB

NEXT line

Black glossy

Width 34 cm

Fryer capacity: 2,0 lt min / 2,5 lt max

Removable stainless steel basket

Oil temperature indicator



PN34BB

NEXT line
Black glossy
Width 34 cm

Electric barbecue
10 Power levels
Lavic stone
Cast iron pan supports



NIXI2GM5VC

NEXT line
Stainless Steel
Width 120 cm

5 Gas brass burners
1 5.0 kW wok burner
Cast iron pan supports
Cast iron electric griddle

Gas convection main oven with gas grill
Cavity volume 100 lt
3 Functions

Gas auxiliary oven with electric grill
Cavity volume 42 lt
2 Functions

Digital thermometer
Food probe
Patented cool door with easy removable glasses
3 Glasses

200 lt and 150 lt freestanding
cavities with 4 convection fans:
Tecnogas exclusive







GRAND - NGIX96G5VC

NEXT line

Stainless Steel

Width 90 cm

5 Gas brass burners

1 5.0 kW wok burner

Cast iron pan supports

4-fan oven

Gas convection oven with gas grill

Cavity volume 150 lt

3 Functions

Digital thermometer

Food probe

Patented cool door with easy removable glasses

Tecnogas exclusive





NIX96EEVTC

NEXT line
Stainless Steel
Width 90 cm

5 Electric ceramic zones
Electric fan multifunction main oven
Energy efficiency class A
Cavity volume 65 lt
8 Functions

Electric conventional auxiliary oven with grill
Energy efficiency class A
Cavity volume 42 lt
2 Functions

Digital thermometer
Food probe
Patented cool door with easy removable glasses
3 Glasses



NIX96M5VC

NEXT line
Stainless Steel
Width 90 cm

5 Gas brass burners
1 5.0 kW wok burner
Cast iron pan supports
Gas convection oven with electric grill
Cavity volume 118 lt
5 Functions

Digital thermometer
Food probe

Patented cool door with easy
removable glasses
3 Glasses



N2X96G5VC

NEXT line

Stainless Steel

Width 90 cm

5 Gas burners

1 5.0 kW wok burner

Cast iron pan supports

Gas convection oven with gas grill

Cavity volume 118 lt

3 Functions

Touch control timer

Patented cool door with easy removable glasses



GRAND - NG3X96G5VC

NEXT line

Stainless Steel

Width 90 cm

5 Gas burners

1 5.0 kW wok burner

Cast iron pan supports

Gas convection oven with gas grill

Cavity volume 150 lt

3 Functions

Minute minder 60'

Patented cool door with easy removable glasses



N3X96G5VE

NEXT line

Stainless Steel

Width 90 cm

5 Gas burners

Enamelled pan supports

Gas oven with gas grill

Cavity volume 118 lt

2 Functions

Minute minder 60'

Patented cool door with easy removable glasses



N2X85E5VE

NEXT line

Stainless Steel

Width 80 cm

5 Gas burners

Enamelled pan supports

Electric fan multifunction oven

Cavity volume 90 lt

6 Functions

Touch control timer

Patented cool door with easy removable glasses



N3X85M5VE

NEXT line

Stainless Steel

Width 80 cm

5 Gas burners

Enamelled pan supports

Gas oven with electric grill

Cavity volume 96 lt

2 Functions

Minute minder 60'

Patented cool door with easy removable glasses



NIX76M5VC

NEXT line

Stainless Steel

Width 70 cm

5 Gas burners

Cast iron pan supports

Gas convection oven with electric grill

Cavity volume 65 lt

5 Functions

Digital thermometer

Food probe

Patented cool door with easy removable glasses

3 Glasses



NIX66EVT

NEXT line

Stainless Steel

Width 60 cm

4 Electric ceramic zones

Electric fan multifunction oven

Cavity volume 65 lt

8 Functions

Digital thermometer

Food probe

Patented cool door with easy removable glasses

3 Glasses



N2X66M4VC

NEXT line

Stainless Steel

Width 60 cm

4 Gas burners

Cast iron pan supports

Gas convection oven with electric grill

Cavity volume 65 lt

5 Functions

Touch control timer

Patented cool door with easy removable glasses



N3X66G4VE

NEXT line

Stainless Steel

Width 60 cm

4 Gas burners

Enamelled pan supports

Gas oven with gas grill

Cavity volume 65 lt

2 Functions

Minute minder 60'

Patented cool door with easy removable glasses



CNI I2B

NEXT line

Black glossy

Width 120 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Analog knob control

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Automatic shut off option



CN I 90B

NEXT line

Black glossy

Width 90 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Analog knob control

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Automatic shut off option



CN I 60 B

NEXT line

Black glossy

Width 60 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Analog knob control

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Automatic shut off option



CN212X

NEXT line

Stainless Steel

Width 120 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Analog knob

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Automatic shut off option



CN290X

NEXT line

Stainless Steel

Width 90 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Analog knob control

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Automatic shut off option



CN260X

NEXT line

Stainless Steel

Width 60 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Analog knob control

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Automatic shut off option



CN3 I2X

NEXT line

Stainless Steel

Width 120 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Electronic control buttons

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Timer



CN390X

NEXT line

Stainless Steel

Width 90 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Electronic control buttons

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Timer



CN360X

NEXT line

Stainless Steel

Width 60 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Electronic control buttons

4 speed settings


Halogen lights

Noise level: 30 dB min / 58 dB max

Timer



DECO line

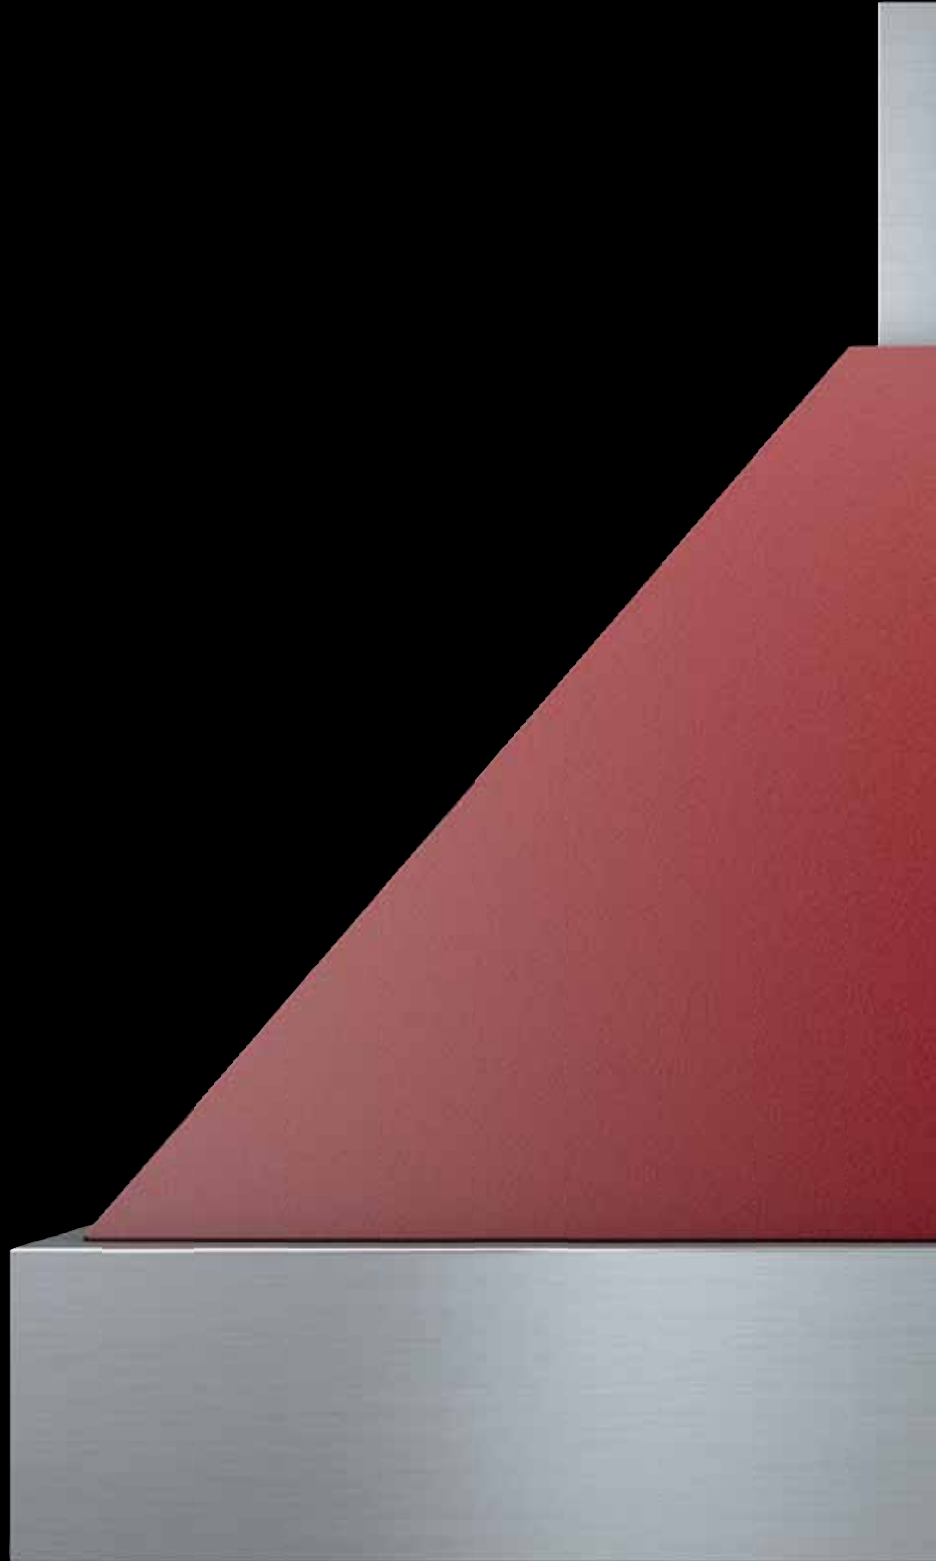

TECNOGAS





Alternative matt



Alternative glossy

Accents



FD2K66E9RO

DECO line

Red matt

Width 60 cm

Electric multifunction oven

Energy efficiency class A -10%

Cavity volume 65 lt

9 Functions

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses

3 Glasses



Alternative matt



Alternative glossy

Accents



FD2K66M3AO

DECO line

Oats

Width 60 cm

Gas convection oven with electric grill

Cavity volume 60 lt

3 Functions

EasyTo Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses

3 Glasses



Alternative matt



Alternative glossy



Accents



FD2K66G3BO

DECO line

Black matt

Width 60 cm

Gas convection oven with gas grill

Cavity volume 60 lt

3 Functions

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses

3 Glasses



Alternative glossy



Accents



FD3K66E5EO

DECO line

Copper

Width 60 cm

Electric multifunction oven

Energy efficiency class A -10%

Cavity volume 65 lt


5 Functions

Easy To Clean (ETC) enamel


Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses

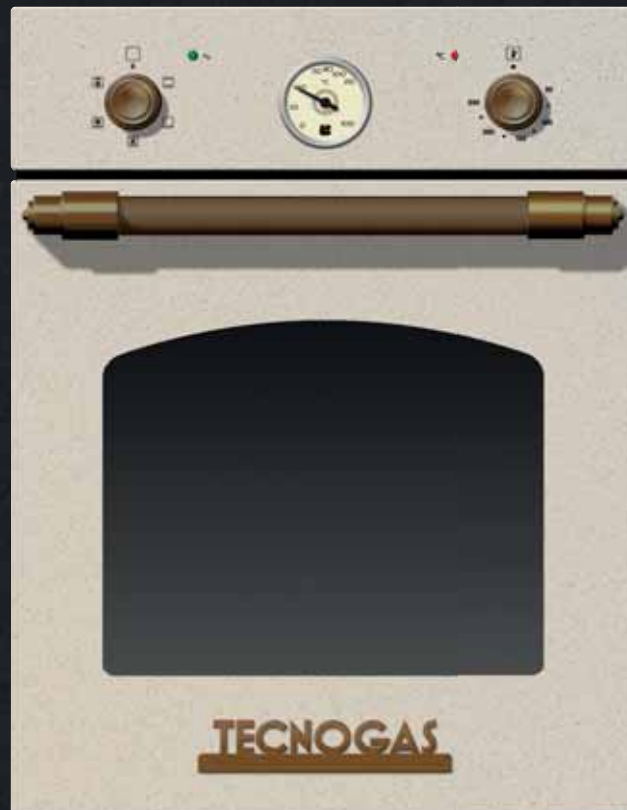

Alternative glossy



Accents



FD2K46E5AB

DECO line

Oats

Width 45 cm

Electric multifunction oven

Energy efficiency class A

Cavity volume 40 lt

5 Functions

Easy To Clean (ETC) enamel

Smooth oven interior with easy removable side grids

Cooling fan

Patented cool door with easy removable glasses



Alternative



Accents



PD90GVF5TGBO

DECO line

Black matt

Width 90 cm

5 Gas burners

Cast iron pan supports

Electronic one-touch ignition

Safety valves



Alternative



Accents



PD75GVF5TGAO

DECO line

Oats

Width 75 cm

5 Gas burners


Cast iron pan supports

Electronic one-touch ignition

Safety valves



Alternative



Accents



PD60GVF4FGBO

DECO line

Black matt

Width 60 cm

4 Gas burners

Cast iron pan supports

Electronic one-touch ignition

Safety valves



Alternative



Accents



PD60GVF4GEO

DECO line

Copper

Width 60 cm

4 Gas burners

Cast iron pan supports

Electronic one-touch ignition

Safety valves



Alternative



Accents



PD45GVF3LGAB

DECO line

Oats

Width 45 cm

3 Gas burners

Cast iron pan supports

Electronic one-touch ignition

Safety valves



Oven doors have never been
so cool: inner glasses easy to
remove for superior cleanability





Alternative matt



Accents



DICO12EE5VC

DECO line
Cream matt
Width 120 cm

5 Gas brass burners
1 5.0 kW wok burner
Cast iron pan supports
Cast iron electric griddle

Electric multifunction main oven:
Energy efficiency class A
Cavity volume 100 lt
8 Functions

Electric conventional auxiliary oven with grill:
Energy efficiency class A
Cavity volume 42 lt
2 Functions

Analog thermometer on main oven
Patented cool door with easy removable glasses
3 Glasses



Alternative matt



Accents



DIRB96EE5VC

DECO line

Red matt

Width 90 cm

5 Gas brass burners

1 5.0 kW wok burner

Cast iron pan supports

Electric fan multifunction main oven:

Energy efficiency class A

Cavity volume 65 lt

8 Functions

Electric conventional auxiliary oven with grill:

Energy efficiency class A

Cavity volume 42 lt

2 Functions

Analog thermometer on main oven

Patented cool door with easy removable glasses

3 Glasses



Alternative matt



Accents



DIBC96E5VC

DECO line
Black matt
Width 90 cm

5 Gas brass burners
1 5.0 kW wok burner
Cast iron pan supports

Electric fan multifunction oven
Energy efficiency class A
Cavity volume 110 lt
8 Functions
Analog thermometer

Patented cool door with easy
removable glasses
3 Glasses



Alternative matt



Accents



D2CO96G5VC

DECO line

Cream matt

Width 90 cm

5 Gas burners

1 5.0 kW wok burner

Cast iron pan supports

Gas convection oven with gas grill

Cavity volume 118 lt

3 Functions

Analog clock

Patented cool door with easy removable glasses



Accents



D3BO96M5VE

DECO line

Black matt

Width 90 cm

5 Gas burners

Enamelled pan supports

Gas oven with electric grill

Cavity volume 118 lt

2 Functions

Minute minder 60'

Patented cool door with easy removable glasses



Alternative matt



Accents



D2GO85G5VE

DECO line

Green matt

Width 80 cm

5 Gas burners

Enamelled pan supports

Gas oven with gas grill

Cavity volume 96 lt

2 Functions

Analog clock

Patented cool door with easy removable glasses



Accents



D3BB85M5VE

DECO line

Black matt

Width 80 cm

5 Gas burners

Enamelled pan supports

Gas oven with electric grill

Cavity volume 96 lt

2 Functions

Minute minder 60'

Patented cool door with easy removable glasses



Alternative matt



Accents



DIGC66M4VC

DECO line

Green matt

Width 60 cm

4 Gas burners

Cast iron pan supports

Gas convection oven with electric grill

Cavity volume 65 lt

5 Functions

Analog thermometer

Patented cool door with easy removable glasses

3 Glasses



Accents



D2BO66E4VC

DECO line

Black matt

Width 60 cm

4 Gas burners

Cast iron pan supports

Electric multifunction oven

Energy efficiency class A

Cavity volume 65 lt

8 Functions

Analog clock

Patented cool door with easy removable glasses



Alternative matt



Accents



D3BB66G4VE

DECO line

Black matt

Width 60 cm

4 Gas burners

Enamelled pan supports

Gas oven with gas grill

Cavity volume 65 lt

2 Functions

Minute minder 60'

Patented cool door with easy removable glasses

Hoods with unmatched design
and performances: the automatic
shut off option







Alternative matt



Accents



CDI 12RO

DECO line

Red matt

Width 120 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Analog knob control

4 speed settings


Halogen lights

Noise level: 30 dB min / 58 dB max


Automatic shut off option



Alternative matt



Alternative glossy



Accents



CDI 90BO

DECO line

Black matt

Width 90 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Analog knob control

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Automatic shut off option



Alternative matt



Alternative glossy

Accents



CDI 60RC

DECO line

Red matt

Width 60 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Analog knob control

4 speed settings


Halogen lights

Noise level: 30 dB min / 58 dB max

Automatic shut off option



Alternative matt



Accents



CD212RO

DECO line

Red matt

Width 120 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Electronic control buttons

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Timer



Alternative matt



Alternative glossy

Accents



CD290CB

DECO line

Cream matt

Width 90 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h


Electronic control buttons

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Timer

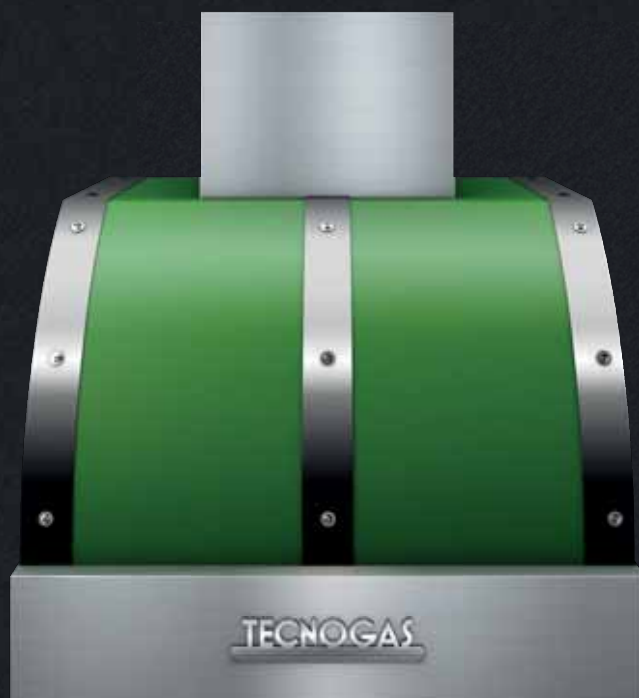

Alternative matt



Alternative glossy

Accents



CD260GC

DECO line

Green matt

Width 60 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h


Electronic control buttons

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Timer

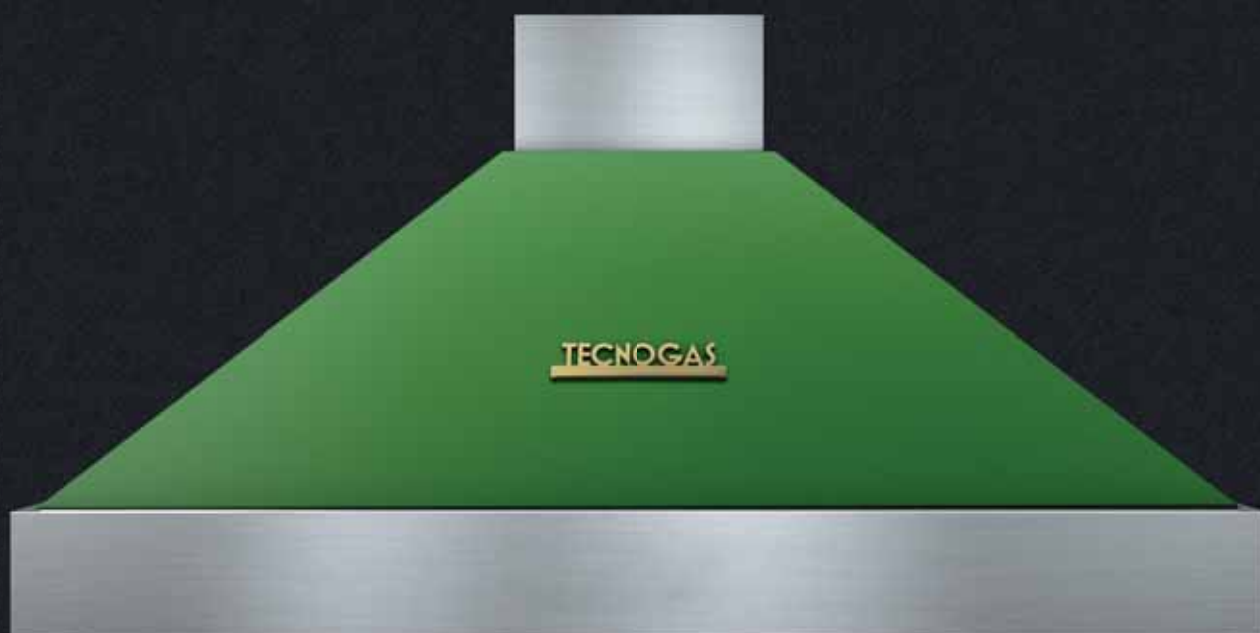

Alternative matt



Accents



CD3 I2GO

DECO line

Green matt

Width 120 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Electronic control buttons

4 speed settings


Halogen lights

Noise level: 30 dB min / 58 dB max



Timer



Alternative matt



Alternative glossy



Accents



CD390BO

DECO line

Black matt

Width 90 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Electronic control buttons

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Timer



Alternative matt



Alternative glossy

Accents



CD360CO

DECO line

Cream matt

Width 60 cm

Wall mount installation

Extraction hood

Stainless steel mesh filters

Maximum aspiration capacity: 850m³/h

Electronic control buttons

4 speed settings

Halogen lights

Noise level: 30 dB min / 58 dB max

Timer



PANORAMA

90



FP2K96M5X



FP3K96M5X



FN2K96G5X



FN2K96E9X



FN3K96G5X



FN2K94E9X

60



FP2K66E9X



FP3K66E5X



FP3K66M3X



FP3K66G3X





FN0K66E11B7



FN2K66E9X7



**FN2K66M3B7****FN3K66E5X7****FN2K66E9X6****FN3K66E5B6****VACUUM PACKER
VN0K64B****STEAM COMBINATION
FN0K64S6B****BLAST CHILLER
BN0K64B****STEAM OVEN
FN2K64S2B****COFFEE MACHINE - CN0K64B****DISHWASHER
DN0K64B****MULTIFUNCTION OVEN
FN0K64R10B****MULTIFUNCTION OVEN
FN0K64E10B****PYROLITIC OVEN
FN0K64P10B****MICROWAVE COMBINATION
MN0K64B****MN0K63B**

60



WARMING DRAWER
WDN12B



FD2K66E9RO



FD2K66M3AO



FD2K66G3BO



FD3K66E5EO



45



FN2K46E5X



FN3K46M3X



FD2K46E5AB



90



PP90GVF5TGX



PN90GVF5LBX



PN90GVF3LBX




PN90GVF5TGX



PN90IT5B




PD90GVF5TGBO



75



PP75GVF5TGX



PN75GVF5LBX



PN75GVF2LBX




PN75GVF5TGX



PN75IT4B




PD75GVF5TGAO



60



PN60GVF4FBX



PN60GVF4FGX




PN60IT4B




PD60GVF4FGB



PD60GVF4GEO



45



PN45GVF3LGX



PN45GVF3GB



PD45GVF3LGAB



40



PN38WB


38



PN38GVFI T8BB



PN38GVF2BB



PN38IS2B



PN38TB

34



PN34GVF2GB




PN34GVFI GB



PN34IT2B



PN34FB



PN34BB

120x60



STRETCH - PSIX12G6VC



PIB12GE5VC



NIX12GM5VC

100x60



PIX16G5VC




90x60



**GRAND
PGIC96M5VC**



PIR96MM5VC



PIG96G5VC



90x60



P2B96E5VC



PATTERN - PP3X96G5VC



P3X96G5VE



GRAND - NG1X96G5VC



N1X96EEVTC



N1X96M5VC



N2X96G5VC




GRAND - NG3X96G5VC



N3X96G5VE



DIRB96EE5VC



D1BC96E5VC



D2CO96G5VC



D3BO96M5VE

80x60



PIX86E5VC



P2C85M5VE



P3X85G5VE



N2X85E5VE



N3X85M5VE



D2GO85G5VE



D3BB85M5VE

70x60



PIX76E5VC



NIX76M5VC

60x60



PIR66M4VC



P2X66E4VC



P3X66G4VE



NIX66EVTC




N2X66M4VC



N3X66G4VE



DIGC66M4VC



D2BO66E4VC



D3BB66G4VE



120



CP212X



CP312X



CN112B



CN212X




CN312X



CD112RO



CD212RO



CD312GO



90



CP190X



CP290X



CP390R



CN190B




CN290X




CN390X


90



CD190BO



CD290CB



CD390BO



60



CP160X



CP260X



CP360C



CN160B




CN260X



CN360X



CD160RC



CD260GC



CD360CO







SPECIFICATIONS

MODEL		FP2K96M3X	FP3K96M5X	FP2K66E9...	FP3K66E5X	FP3K66M3X
Style		PRO	PRO	PRO	PRO	PRO
Colours		X	X	X , B	X	X
Deco accents		-	-	-	-	-
Width	cm	90	90	60	60	60
Oven Type:						
Electronic touch control multifunction oven		-	-	-	-	-
Electric multifunction oven		-	-	•	•	-
Gas convection oven with electric grill		•	-	-	-	-
Gas convection oven with gas grill		-	-	-	-	-
Gas oven with electric grill		-	•	-	-	•
Gas oven with gas grill		-	-	-	-	-
Energy efficiency class*		-	-	A -10%	A -10%	-
Cavity volume	lt	125	100	65	65	60
Functions	n	5	5	9	5	3
Programmer:						
Analog thermometer		•	-	•	-	-
Touch control with delayed start and duration of cooking		-	-	-	-	-
Touch control timer		-	-	-	-	-
Analog clock		-	-	-	-	-
Analog cut-off timer 120'		-	-	-	•	-
Minute minder 60'		-	•	-	-	•
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		- / •	- / •	- / •	- / •	- / •
Cooling fan		•	•	•	•	•
Patented cool door with easy removable glasses / N.glasses	n	- / 2	- / 2	• / 2	• / 2	• / 2
Roasting spit		•	•	-	-	-
Wire shelves	n	2	2	1	1	1
Telescopic rails	n	-	-	2	-	-
Enamelled trays 30 mm / Enamelled deep trays 60 mm	n	1 / -	1 / -	1 / 1	1 / 1	1 / 1
Electronic one hand ignition		•	•	-	-	•
Safety valves		•	•	-	-	•
Pyrolytic self cleaning		-	-	-	-	-
No fingerprint stainless steel		•	-	-	-	-
Oven lights	n	2	1	1	1	1
Cooking sensor		-	-	-	-	-
Safety door lock		-	-	-	-	-
Maximum oven power	W	2500	2500	2100	2100	1300
Maximum cooking temperature	°C	250	250	250	250	250
Voltage -- Frequency	V -- Hz	230 -- 50 / 60	230 -- 50 / 60	230 -- 50 / 60	230 -- 50 / 60	230 -- 50 / 60
Gas adjustment: Natural gas (G20) / LPG Propane gas (G30)		▲ / ▲	▲ / ▲	- / -	- / -	▲ / ▲

OVENS

MODEL		FP3K66G3X	FN2K96G5X	FN2K96E9X	FN3K96G5X	FN2K94E9X
Style		PRO	NEXT	NEXT	NEXT	NEXT
Colours		X	X	X	X	X
Deco accents		-	-	-	-	-
Width	cm	60	90	90	90	90
Oven Type:						
Electronic touch control multifunction oven		-	-	-	-	-
Electric multifunction oven		-	-	•	-	•
Gas convection oven with electric grill		-	-	-	-	-
Gas convection oven with gas grill		-	•	-	-	-
Gas oven with electric grill		-	-	-	-	-
Gas oven with gas grill		•	-	-	•	-
Energy efficiency class*		-	-	A	-	A
Cavity volume	lt	60	125	125	100	100
Functions	n	3	5	9	5	9
Programmer:						
Analog thermometer		-	-	-	-	-
Touch control with delayed start and duration of cooking		-	-	•	-	•
Touch control timer		-	•	-	-	-
Analog clock		-	-	-	-	-
Analog cut-off timer 120'		-	-	-	-	-
Minute minder 60'		•	-	-	•	-
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		- / •	- / •	- / •	- / •	- / •
Cooling fan		•	•	•	•	•
Patented cool door with easy removable glasses / N.glasses	n	• / 2	- / 2	- / 2	- / 2	• / 3
Roasting spit		-	•	-	•	-
Wire shelves	n	1	2	2	2	2
Telescopic rails	n	-	-	1	-	-
Enamelled trays 30 mm / Enamelled deep trays 60 mm	n	1 / 1	1 / -	1 / -	1 / -	1 / -
Electronic one hand ignition		•	•	-	•	-
Safety valves		•	•	-	•	-
Pyrolytic self cleaning		-	-	-	-	-
No fingerprint stainless steel		-	•	•	-	•
Oven lights	n	1	2	2	1	2
Cooking sensor		-	-	-	-	-
Safety door lock		-	-	-	-	-
Maximum oven power	W	2700	4000	2350	2700	2700
Maximum cooking temperature	°C	250	250	250	250	250
Voltage -- Frequency	V -- Hz	230 -- 50 / 60	230 -- 50 / 60	230 -- 50 / 60	230 -- 50 / 60	230 -- 50 / 60
Gas adjustment: Natural gas (G20) / LPG Propane gas (G30)		▲ / ▲	▲ / ▲	- / -	▲ / ▲	- / -

* According to Standard EN 50304

MODEL		FN0K66E11B7	FN2K66E9...7	FN2K66M3B7	FN3K66E5...7
Style		NEXT	NEXT	NEXT	NEXT
Colours		BL	X , BL	X , BL	X , BL
Deco accents		-	-	-	-
Width	cm	60	60	60	60
Oven Type:		-	-	-	-
Electronic touch control multifunction oven		•	-	-	-
Electric multifunction oven		-	•	-	•
Gas convection oven with electric grill		-	-	•	-
Gas convection oven with gas grill		-	-	-	-
Gas oven with electric grill		-	-	-	-
Gas oven with gas grill		-	-	-	-
Energy efficiency class*		A -20%	A -20%	-	A -20%
Cavity volume	lt	72	72	72	72
Functions	n	11	9	3	5
Programmer:					
Analog thermometer		-	-	-	-
Touch control with delayed start and duration of cooking		•	•	-	-
Touch control timer		-	-	•	-
Analog clock		-	-	-	-
Analog cut-off timer 120'		-	-	-	•
Minute minder 60'		-	-	-	-
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		- / •	- / •	- / •	- / •
Cooling fan		•	•	•	•
Patented cool door with easy removable glasses / N.glasses	n	• / 3	• / 2	• / 2	• / 2
Roasting spit		-	-	-	-
Wire shelves	n	1	1	1	1
Telescopic rails	n	2	2	-	-
Enamelled trays 30 mm / Enamelled deep trays 60 mm	n	1 / 1	1 / 1	1 / 1	1 / 1
Electronic one hand ignition		-	-	•	-
Safety valves		-	-	•	-
Pyrolytic self cleaning		-	-	-	-
No fingerprint stainless steel		-	•	•	-
Oven lights	n	1	1	1	1
Cooking sensor		-	-	-	-
Safety door lock		-	-	-	-
Maximum oven power	W	3100	2250	1500	2100
Maximum cooking temperature	°C	250	250	250	250
Voltage -- Frequency	V -- Hz	230 -- 50 / 60	230 -- 50 / 60	230 -- 50 / 60	230 -- 50 / 60
Gas adjustment: Natural gas (G20) / LPG Propane gas (G30)		- / -	- / -	▲ / ▲	- / -

OVENS

MODEL		FN2K66E9...6	FN3K66E5...6	FN2K46E5...	FN3K46M3X
Style		NEXT	NEXT	NEXT	NEXT
Colours		X , BL	X , BL	X , BL	X
Deco accents		-	-	-	-
Width	cm	60	60	45	45
Oven Type:					
Electronic touch control multifunction oven		-	-	-	-
Electric multifunction oven		•	•	•	-
Gas convection oven with electric grill		-	-	-	-
Gas convection oven with gas grill		-	-	-	-
Gas oven with electric grill		-	-	-	•
Gas oven with gas grill		-	-	-	-
Energy efficiency class*		A -10%	A -10%	A	-
Cavity volume	lt	65	65	40	40
Functions	n	9	5	5	3
Programmer:					
Analog thermometer		-	-	-	-
Touch control with delayed start and duration of cooking		•	-	•	-
Touch control timer		-	-	-	-
Analog clock		-	-	-	-
Analog cut-off timer 120'		-	•	-	-
Minute minder 60'		-	-	-	•
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		- / •	- / •	- / •	- / •
Cooling fan		•	•	•	•
Patented cool door with easy removable glasses / N.glasses	n	• / 2	• / 2	• / 2	• / 2
Roasting spit		-	-	-	-
Wire shelves	n	1	1	1	1
Telescopic rails	n	-	-	-	-
Enamelled trays 30 mm / Enamelled deep trays 60 mm	n	1 / 1	1 / 1	1 / -	1 / -
Electronic one hand ignition		-	-	-	•
Safety valves		-	-	-	•
Pyrolytic self cleaning		-	-	-	-
No fingerprint stainless steel		•	•	-	-
Oven lights	n	1	1	1	1
Cooking sensor		-	-	-	-
Safety door lock		-	-	-	-
Maximum oven power	W	2100	2100	1600	2100
Maximum cooking temperature	°C	250	250	250	250
Voltage -- Frequency	V -- Hz	230 -- 50 / 60	230 -- 50 / 60	230 -- 50 / 60	230 -- 50 / 60
Gas adjustment: Natural gas (G20) / LPG Propane gas (G30)		- / -	- / -	- / -	▲ / ▲

* According to Standard EN 50304

OVENS

MODEL		FD2K66E9...	FD2K66M3...	FD2K66G3...	FD3K66E5...
Style		DECO	DECO	DECO	DECO
Colours		B , C , G , R , A , E	B , C , G , R , A , E	B , C , G , R , A , E	B , A , E
Deco accents		B , O , C	B , O , C	B , O , C	B , O , C
Width	cm	60	60	60	60
Oven Type:					
Electronic touch control multifunction oven		-	-	-	-
Electric multifunction oven		•	-	-	•
Gas convection oven with electric grill		-	•	-	-
Gas convection oven with gas grill		-	-	•	-
Gas oven with electric grill		-	-	-	-
Gas oven with gas grill		-	-	-	-
Energy efficiency class*		A -10%	-	-	A -10%
Cavity volume	lt	65	60	60	65
Functions	n	9	3	3	5
Programmer:					
Analog thermometer		•	•	•	-
Touch control with delayed start and duration of cooking		-	-	-	-
Touch control timer		-	-	-	-
Analog clock		-	-	-	-
Analog cut-off timer 120'		-	-	-	•
Minute minder 60'		-	-	-	-
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		- / •	- / •	- / •	- / •
Cooling fan		•	•	•	•
Patented cool door with easy removable glasses / N.glasses	n	• / 3	• / 3	• / 3	• / 2
Roasting spit		-	-	-	-
Wire shelves	n	1	1	1	1
Telescopic rails	n	2	-	-	-
Enamelled trays 30 mm / Enamelled deep trays 60 mm	n	1 / 1	1 / 1	1 / 1	1 / 1
Electronic one hand ignition		-	•	•	-
Safety valves		-	•	•	-
Pyrolytic self cleaning		-	-	-	-
No fingerprint stainless steel		-	-	-	-
Oven lights	n	1	1	1	1
Cooking sensor		-	-	-	-
Safety door lock		-	-	-	-
Maximum oven power	W	2150	1900	2700	2100
Maximum cooking temperature	°C	250	250	250	250
Voltage -- Frequency	V -- Hz	230 -- 50 / 60	230 -- 50 / 60	230 -- 50 / 60	230 -- 50 / 60
Gas adjustment: Natural gas (G20) / LPG Propane gas (G30)		- / -	▲ / ▲	▲ / ▲	- / -

* According to Standard EN 50304

OVENS

MODEL		FD2K46E5...
Style		DECO
Colours		B , A , E
Deco accents		B , O, C
Width	cm	45
Oven Type:		
Electronic touch control multifunction oven		-
Electric multifunction oven		•
Gas convection oven with electric grill		-
Gas convection oven with gas grill		-
Gas oven with electric grill		-
Gas oven with gas grill		-
Energy efficiency class*		A
Cavity volume	lt	40
Functions	n	5
Programmer:		
Analog thermometer		-
Touch control with delayed start and duration of cooking		?
Touch control timer		-
Analog clock		-
Analog cut-off timer 120'		-
Minute minder 60'		-
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		- / •
Cooling fan		•
Patented cool door with easy removable glasses / N.glasses	n	• / 2
Roasting spit		-
Wire shelves	n	1
Telescopic rails	n	-
Enamelled trays 30 mm / Enamelled deep trays 60 mm	n	1 / -
Electronic one hand ignition		-
Safety valves		-
Pyrolitic self cleaning		-
No fingerprint stainless steel		-
Oven lights	n	1
Cooking sensor		-
Safety door lock		-
Maximum oven power	W	1600
Maximum cooking temperature	°C	250
Voltage -- Frequency	V -- Hz	230 -- 50 / 60
Gas adjustment: Natural gas (G20) / LPG Propane gas (G30)		- / -

* According to Standard EN 50304

OVENS

MODEL		FN0K64R10B	FN0K64E10B	FN0K64P10B
Style	cm	NEXT	NEXT	NEXT
Colours		BL	BL	BL
Width	cm	60		
Electronic digital multifunction 10 functions		•	•	•
Electric oven digital programmer		•	•	•
Preset cooking recipes	n	50	-	-
Programmable cooking recipes	n	10	-	-
Electric oven energy efficiency class		A	A	A
Touch control		•	•	•
Pyrolitic self cleaning		-	•	-
Full cleaning cycle (180 min)		-	•	-
Eco cleaning cycle (90 min)		-	•	-
Automatic safety door lock		-	•	-
Cool door with removable inner glass / N. glasses	n	• / 3	• / 4	• / 3
Smooth oven interior with easy removable side grids		•	•	•
Cooling fan		•	•	•
Pyrolitic cavity enamel		-	•	-
No fingerprint stainless steel		•	-	•
ACCESSORIES				
Wire shelves	n			
Enamelled trays 30mm	n			
Oven light		•	•	•

OVENS

MODEL		MN0K63X	MN0K63B
Style		NEXT	NEXT
Colours		X	BL
Width	cm	60	60
Oven Type:		Combination microwave+grill	Combination microwave+grill
Cavity volume	lt	25	25
Push Button Door		•	•
Front exterior		Stainless Steel	Black Glass
No fingerprint stainless steel		•	-
Outer Housing		Metal Silver	Metal Silver
Stainless steel oven cavity		•	•
LED display color		Red	Red
GlassTurntable Diameter	mm	315	315
Door Release Button		•	•
Metal Grill Rack	n	1	1
Grill Heater		•	•
Timer		95'	95'
Microwave cooking		•	•
Grill cooking		•	•
Combination cooking		•	•
Pe-set Cooking		•	-
Convection		-	-
Defrost by weight		•	•
Defrost by time		•	•
Auto reheat		•	-
Auto Cooking Programs	n	8	8
Multi-Cooking Function		•	•
Child Safety Lock		•	•
Quick Start		•	•
End Cooking Signal		•	•
Microwave power 100%	W	900	900
Microwave power 80%	W	720	720
Microwave power 50%	W	450	450
Microwave power 30%	W	270	270
Microwave power 10%	W	90	90
Grill power	W	1000	1000
Voltage -- Frequency		230 -- 50	230 -- 50
Operation Frequency	MHz	2450	2450

OVENS

MODEL		FN0K64S6B	FN2K64S2B
Style	cm	NEXT	NEXT
Colours		BL	BL
Width	cm	60	60
Touch control		•	-
Stainless steel oven cavity		•	•
Steam cooking		•	•
Hot air cooking		•	-
Combi hot air+steam cooking		•	-
Grill cooking		-	•
Preset cooking recipes	n	50	-
Programmable cooking recipes	n	10	-
Low temperature cooking		•	-
Regeneration program		•	-
Self cleaning program		•	-
Electric oven energy efficiency class		A	A
Cooling fan		•	•
Meat probe		•	-
Oven door glasses	n	3	2
Oven light		•	•
Touch control programmer		•	•

MODEL		WDN12B
Style		NEXT
Colours		BL
Width	cm	60
Telescopic rails opening		•
Maximum load	kG	25
Control light		•
Anti slip mat		•
Temperature range	°C	30-85
Maximum power	W	450

MODEL		DN0K64B
Style	cm	NEXT
Colours		BL
Width	cm	60
Touch control		•
Stainless steel cavity		•
Stainless steel door interior		•
Energy efficiency class		A
Washing performance class		A
Drying performance class		A
Place settings	n	6
Programs	n	5
Delayed start		•
Grey baskets		•
Cutlery basket		•
Maximum dish diameter	cm	29
3 in one program		•
Extra rinse program		•

MODEL		CN0K64B
Style	cm	NEXT
Colours		BL
Width	cm	60
Touch control		•
Brass coffee preparation system		•
Adjustable grain thickness		•
Steam boiler		•
Single or double coffee supply selection		•
Strong or weak coffee supply selection		•
Adjustable coffee dispenser		•
Empty water tank indicator		•
Full coffee waste drawer indicator		•
Water filter		•
Led lights		•

MODEL		MN0K64B
Style	cm	NEXT
Colours		BL
Width	cm	60
Touch control		•
Stainless steel oven cavity		•
Microwave cooking		•
Electric grill cooking		•
Combi microwave+grill cooking		•
Defrost		•
Auto menu		•
Digital programmer		•
Glass rotating plate		•
Oven door glasses	n	3
Oven light		•

MODEL		BN0K64B
Dimension	cm	NEXT
Colours		BL
Width	cm	60
Touch control		•
Positive blast		•
Negative Blast		•
Blast power levels	n	3
Precision probe		•
Bottle special program		•
Aluminum cans special program		•
Timer		•

MODEL		VN064B
Style		NEXT
Colours		BL
Width	cm	60
Touch control		•
Vacuum efficiency		99%
Programs	n	3
Food conservation program		•
Food cooking program		•
Jar vacuum program		•

MODEL		PP90GVF5TGX	PP75GVF5TGX	PN90GVF5LBX
Style		PRO	PRO	NEXT
Colours		X	X	X
Deco accents		-	-	-
Width	cm	90	75	90
Gas burners	n	5	5	5
Wok burner	n -- W	1 -- 3800	1 -- 3800	1 -- 5000
Rapid	n -- W	1 -- 3000	1 -- 3000	1 -- 3000
Semi-rapid	n -- W	2 -- 1750	2 -- 1750	2 -- 1650
Auxiliary	n -- W	1 -- 1000	1 -- 1000	1 -- 1000
Brass burners		-	-	•
Pan supports type: Cast iron / Enamelled		• / -	• / -	• / -
Electronic one-touch ignition		•	•	•
Safety valves		•	•	•
Wok ring		▲	▲	•
Simmer ring		▲	▲	•
Maximum gas power	W	11300	11300	10650
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	▲ / ▲	▲ / ▲
Electric plates	n	-	-	-
Normal 180 mm	n -- W	-	-	-
Rapid 180 mm	n -- W	-	-	-
Normal 145 mm	n -- W	-	-	-
Rapid 145 mm	n -- W	-	-	-
Electric ceramic zones	n	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 145 mm	n -- W	-	-	-
Hi-light 140/210 mm	n -- W	-	-	-
Hi-light 120/180 mm	n -- W	-	-	-
Hi-light 140x250 mm	n -- W	-	-	-
Hi-light 170x265 mm	n -- W	-	-	-
Electric induction zones	n	-	-	-
Induction 160 mm	n -- W	-	-	-
Induction 210 mm	n -- W	-	-	-
Induction 145 mm	n -- W	-	-	-
Induction 260 mm	n -- W	-	-	-
Induction 200 mm	n -- W	-	-	-
Induction 210x180 mm	n -- W	-	-	-
Wok cooking area 300 mm	n -- W	-	-	-
Power levels	n	-	-	-
Touch control		-	-	-
Slider control		-	-	-
Bridge function		-	-	-
Turbo boost		-	-	-
Programmable cooking times		-	-	-
Timer		-	-	-
Power management		-	-	-
3 preset cooking temperatures (melting/simmering/boiling)		-	-	-
Pause / recall		-	-	-
Command lock		-	-	-
Pot diameter detection		-	-	-
Anti-spill safety		-	-	-
Automatic switch-off		-	-	-
Hob operating warning light		-	-	-
Residual heat indicator		-	-	-
Stainless steel teppan yaki surface		-	-	-
Lavic stone		-	-	-
Fryer capacity min/max	lt	-	-	-
Removable stainless steel basket		-	-	-
Oil temperature indicator		-	-	-
Domino joint kit		-	-	-
Scraper		-	-	-
Power cord		•	•	•
Maximum electric power	W	0,6	0,6	-
Voltage -- Frequency	V -- Hz	230/240 -- 50/60	230/240 -- 50/60	230/240 -- 50/60

MODEL		PN90GVF3LBX	PN90GVF5TGX	PN90IT5B
Style		NEXT	NEXT	NEXT
Colours		X	X	BL
Deco accents		-	-	-
Width	cm	90	90	90
Gas burners	n	3	5	-
Wok burner	n -- W	2 -- 5000	1 -- 3800	-
Rapid	n -- W	-	1 -- 3000	-
Semi-rapid	n -- W	1 -- 1650	2 -- 1750	-
Auxiliary	n -- W	-	1 -- 1000	-
Brass burners		•	-	-
Pan supports type: Cast iron / Enamelled		• / -	• / -	-
Electronic one-touch ignition		•	•	-
Safety valves		•	•	-
Wok ring		•	•	-
Simmer ring		•	•	-
Maximum gas power	W	11650	11300	-
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	▲ / ▲	-
Electric plates	n	-	-	-
Normal 180 mm	n -- W	-	-	-
Rapid 180 mm	n -- W	-	-	-
Normal 145 mm	n -- W	-	-	-
Rapid 145 mm	n -- W	-	-	-
Electric ceramic zones	n	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 145 mm	n -- W	-	-	-
Hi-light 140/210 mm	n -- W	-	-	-
Hi-light 120/180 mm	n -- W	-	-	-
Hi-light 140x250 mm	n -- W	-	-	-
Hi-light 170x265 mm	n -- W	-	-	-
Electric induction zones	n	-	-	5
Induction 160 mm	n -- W	-	-	2 -- 1400
Induction 210 mm	n -- W	-	-	-
Induction 145 mm	n -- W	-	-	-
Induction 260 mm	n -- W	-	-	1 -- 2300 / 3000
Induction 200 mm	n -- W	-	-	2 -- 2300 / 3000
Induction 210x180 mm	n -- W	-	-	-
Wok cooking area 300 mm	n -- W	-	-	-
Power levels	n	-	-	9
Touch control		-	-	•
Slider control		-	-	-
Bridge function		-	-	-
Turbo boost		-	-	•
Programmable cooking times		-	-	-
Timer		-	-	•
Power management		-	-	-
3 preset cooking temperatures (melting/simmering/boiling)		-	-	-
Pause / recall		-	-	•
Command lock		-	-	•
Pot diameter detection		-	-	•
Anti-spill safety		-	-	•
Automatic switch-off		-	-	•
Hob operating warning light		-	-	-
Residual heat indicator		-	-	•
Stainless steel teppan yaki surface		-	-	-
Lavic stone		-	-	-
Fryer capacity min/max	lt	-	-	-
Removable stainless steel basket		-	-	-
Oil temperature indicator		-	-	-
Domino joint kit		-	-	-
Scraper		-	-	-
Power cord		•	•	•
Maximum electric power	W	0,8	0,6	9700
Voltage -- Frequency	V -- Hz	230/240 -- 50/60	230/240 -- 50/60	230/240 -- 50/60

MODEL		PN75GVF5LBX	PN75GVF2LBX	PN75GVF5TGX
Style		NEXT	NEXT	NEXT
Colours		X	X	X
Deco accents		-	-	-
Width	cm	75	75	75
Gas burners	n	5	2	5
Wok burner	n -- W	1 -- 5000	2 -- 5000	1 -- 3800
Rapid	n -- W	1 -- 3000	-	1 -- 3000
Semi-rapid	n -- W	2 -- 1650	-	2 -- 1750
Auxiliary	n -- W	1 -- 1000	-	1 -- 1000
Brass burners		•	•	-
Pan supports type: Cast iron / Enamelled		• / -	• / -	• / -
Electronic one-touch ignition		•	•	•
Safety valves		•	•	•
Wok ring		•	•	•
Simmer ring		•	-	-
Maximum gas power	W	10650	10000	11300
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	▲ / ▲	▲ / ▲
Electric plates	n	-	-	-
Normal 180 mm	n -- W	-	-	-
Rapid 180 mm	n -- W	-	-	-
Normal 145 mm	n -- W	-	-	-
Rapid 145 mm	n -- W	-	-	-
Electric ceramic zones	n	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 145 mm	n -- W	-	-	-
Hi-light 140/210 mm	n -- W	-	-	-
Hi-light 120/180 mm	n -- W	-	-	-
Hi-light 140x250 mm	n -- W	-	-	-
Hi-light 170x265 mm	n -- W	-	-	-
Electric induction zones	n	-	-	-
Induction 160 mm	n -- W	-	-	-
Induction 210 mm	n -- W	-	-	-
Induction 145 mm	n -- W	-	-	-
Induction 260 mm	n -- W	-	-	-
Induction 200 mm	n -- W	-	-	-
Induction 210x180 mm	n -- W	-	-	-
Wok cooking area 300 mm	n -- W	-	-	-
Power levels	n	-	-	-
Touch control		-	-	-
Slider control		-	-	-
Bridge function		-	-	-
Turbo boost		-	-	-
Programmable cooking times		-	-	-
Timer		-	-	-
Power management		-	-	-
3 preset cooking temperatures (melting/simmering/boiling)		-	-	-
Pause / recall		-	-	-
Command lock		-	-	-
Pot diameter detection		-	-	-
Anti-spill safety		-	-	-
Automatic switch-off		-	-	-
Hob operating warning light		-	-	-
Residual heat indicator		-	-	-
Stainless steel teppan yaki surface		-	-	-
Lavic stone		-	-	-
Fryer capacity min/max	lt	-	-	-
Removable stainless steel basket		-	-	-
Oil temperature indicator		-	-	-
Domino joint kit		-	-	-
Scraper		-	-	-
Power cord		•	•	•
Maximum electric power	W	0,8	0,8	0,6
Voltage -- Frequency	V -- Hz	230/240 -- 50/60	230/240 -- 50/60	230/240 -- 50/60

MODEL		PN75IT4B	PN60GVF4FBX	PN60GVF4FGX
Style		NEXT	NEXT	NEXT
Colours		BL	X	X
Deco accents		-	-	-
Width	cm	75	60	60
Gas burners	n	-	4	4
Wok burner	n -- W	-	1 -- 5000	1 -- 3300
Rapid	n -- W	-	-	-
Semi-rapid	n -- W	-	2 -- 1650	2 -- 1750
Auxiliary	n -- W	-	1 -- 1000	1 -- 1000
Brass burners		-	•	-
Pan supports type: Cast iron / Enamelled		-	• / -	• / -
Electronic one-touch ignition		-	•	•
Safety valves		-	•	•
Wok ring		-	•	•
Simmer ring		-	•	•
Maximum gas power	W	-	8300	7800
Gas adjustment: Natural gas (G20) / LPG (G30)		-	▲ / ▲	▲ / ▲
Electric plates	n	-	-	-
Normal 180 mm	n -- W	-	-	-
Rapid 180 mm	n -- W	-	-	-
Normal 145 mm	n -- W	-	-	-
Rapid 145 mm	n -- W	-	-	-
Electric ceramic zones	n	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 145 mm	n -- W	-	-	-
Hi-light 140/210 mm	n -- W	-	-	-
Hi-light 120/180 mm	n -- W	-	-	-
Hi-light 140x250 mm	n -- W	-	-	-
Hi-light 170x265 mm	n -- W	-	-	-
Electric induction zones	n	4	-	-
Induction 160 mm	n -- W	-	-	-
Induction 210 mm	n -- W	2 -- 1500 / 2000	-	-
Induction 145 mm	n -- W	2 -- 1500 / 2000	-	-
Induction 260 mm	n -- W	-	-	-
Induction 200 mm	n -- W	-	-	-
Induction 210x180 mm	n -- W	-	-	-
Wok cooking area 300 mm	n -- W	-	-	-
Power levels	n	9	-	-
Touch control		•	-	-
Slider control		-	-	-
Bridge function		-	-	-
Turbo boost		•	-	-
Programmable cooking times		-	-	-
Timer		•	-	-
Power management		•	-	-
3 preset cooking temperatures (melting/simmering/boiling)		-	-	-
Pause / recall		-	-	-
Command lock		•	-	-
Pot diameter detection		•	-	-
Anti-spill safety		•	-	-
Automatic switch-off		•	-	-
Hob operating warning light		-	-	-
Residual heat indicator		•	-	-
Stainless steel teppan yaki surface		-	-	-
Lavic stone		-	-	-
Fryer capacity min/max	lt	-	-	-
Removable stainless steel basket		-	-	-
Oil temperature indicator		-	-	-
Domino joint kit		-	-	-
Scraper		-	-	-
Power cord		•	•	•
Maximum electric power	W	7200	0,8	0,6
Voltage -- Frequency	V -- Hz	230/240 -- 50/60	230/240 -- 50/60	230/240 -- 50/60

MODEL		PN60IT4B	PN45GVF3LGX	PN45GVF3GB
Style		NEXT	NEXT	NEXT
Colours		BL	X	BL
Deco accents		-	-	-
Width	cm	60	45	45
Gas burners	n	-	3	3
Wok burner	n -- W	-	1 -- 3800	-
Rapid	n -- W	-	-	1 -- 3000
Semi-rapid	n -- W	-	1 -- 1750	1 -- 1750
Auxiliary	n -- W	-	1 -- 1000	1 -- 1000
Brass burners		-	-	-
Pan supports type: Cast iron / Enamelled		-	• / -	• / -
Electronic one-touch ignition		-	•	•
Safety valves		-	•	•
Wok ring		-	•	-
Simmer ring		-	•	-
Maximum gas power	W	-	6550	5750
Gas adjustment: Natural gas (G20) / LPG (G30)		-	▲ / ▲	▲ / ▲
Electric plates	n	-	-	-
Normal 180 mm	n -- W	-	-	-
Rapid 180 mm	n -- W	-	-	-
Normal 145 mm	n -- W	-	-	-
Rapid 145 mm	n -- W	-	-	-
Electric ceramic zones	n	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 145 mm	n -- W	-	-	-
Hi-light 140/210 mm	n -- W	-	-	-
Hi-light 120/180 mm	n -- W	-	-	-
Hi-light 140x250 mm	n -- W	-	-	-
Hi-light 170x265 mm	n -- W	-	-	-
Electric induction zones	n	4	-	-
Induction 160 mm	n -- W	-	-	-
Induction 210 mm	n -- W	2 -- 1200 / 1600	-	-
Induction 145 mm	n -- W	2 -- 1200 / 1600	-	-
Induction 260 mm	n -- W	-	-	-
Induction 200 mm	n -- W	-	-	-
Induction 210x180 mm	n -- W	-	-	-
Wok cooking area 300 mm	n -- W	-	-	-
Power levels	n	9	-	-
Touch control		•	-	-
Slider control		-	-	-
Bridge function		-	-	-
Turbo boost		•	-	-
Programmable cooking times		-	-	-
Timer		•	-	-
Power management		•	-	-
3 preset cooking temperatures (melting/simmering/boiling)		-	-	-
Pause / recall		-	-	-
Command lock		•	-	-
Pot diameter detection		•	-	-
Anti-spill safety		•	-	-
Automatic switch-off		•	-	-
Hob operating warning light		-	-	-
Residual heat indicator		•	-	-
Stainless steel teppan yaki surface		-	-	-
Lavic stone		-	-	-
Fryer capacity min/max	lt	-	-	-
Removable stainless steel basket		-	-	-
Oil temperature indicator		-	-	-
Domino joint kit		-	-	-
Scraper		-	-	-
Power cord		•	•	•
Maximum electric power	W	7200	0,6	0,6
Voltage -- Frequency	V -- Hz	230/240 -- 50/60	230/240 -- 50/60	230/240 -- 50/60

MODEL		PN38GVFIT8BB	PN38GVF2BB	PN38IS2B
Style		NEXT	NEXT	NEXT
Colours		BL	BL	BL
Deco accents		-	-	-
Width	cm	38	38	38
Gas burners	n	1	2	-
Wok burner	n -- W	1 -- 8100	-	-
Rapid	n -- W	-	1 -- 3000	-
Semi-rapid	n -- W	-	-	-
Auxiliary	n -- W	-	1 -- 1000	-
Brass burners		•	•	-
Pan supports type: Cast iron / Enamelled		• / -	• / -	-
Electronic one-touch ignition		•	•	-
Safety valves		•	•	-
Wok ring		•	-	-
Simmer ring		-	•	-
Maximum gas power	W	8100	4650	-
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	▲ / ▲	-
Electric plates	n	-	-	-
Normal 180 mm	n -- W	-	-	-
Rapid 180 mm	n -- W	-	-	-
Normal 145 mm	n -- W	-	-	-
Rapid 145 mm	n -- W	-	-	-
Electric ceramic zones	n	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 145 mm	n -- W	-	-	-
Hi-light 140/210 mm	n -- W	-	-	-
Hi-light 120/180 mm	n -- W	-	-	-
Hi-light 140x250 mm	n -- W	-	-	-
Hi-light 170x265 mm	n -- W	-	-	-
Electric induction zones	n	-	-	2
Induction 160 mm	n -- W	-	-	-
Induction 210 mm	n -- W	-	-	-
Induction 145 mm	n -- W	-	-	-
Induction 260 mm	n -- W	-	-	-
Induction 200 mm	n -- W	-	-	-
Induction 210x180 mm	n -- W	-	-	2 -- 2100 / 3700
Wok cooking area 300 mm	n -- W	-	-	-
Power levels	n	-	-	9
Touch control		-	-	•
Slider control		-	-	•
Bridge function		-	-	•
Turbo boost		-	-	•
Programmable cooking times		-	-	•
Timer		-	-	•
Power management		-	-	-
3 preset cooking temperatures (melting/simmering/boiling)		-	-	•
Pause / recall		-	-	•
Command lock		-	-	•
Pot diameter detection		-	-	•
Anti-spill safety		-	-	•
Automatic switch-off		-	-	•
Hob operating warning light		-	-	•
Residual heat indicator		-	-	•
Stainless steel teppan yaki surface		-	-	-
Lavic stone		-	-	-
Fryer capacity min/max	lt	-	-	-
Removable stainless steel basket		-	-	-
Oil temperature indicator		-	-	-
Domino joint kit		-	-	-
Scraper		-	-	-
Power cord		•	•	•
Maximum electric power	W	0,8	0,8	7400
Voltage -- Frequency	V -- Hz	230/240 -- 50/60	230/240 -- 50/60	230/240 -- 50/60

MODEL		PN38TB	PN38WB	PN34GVFI GB
Style		NEXT	NEXT	NEXT
Colours		BL	BL	BL
Deco accents		-	-	-
Width	cm	38	40	34
Gas burners	n	-	-	1
Wok burner	n -- W	-	-	1 -- 3800
Rapid	n -- W	-	-	-
Semi-rapid	n -- W	-	-	-
Auxiliary	n -- W	-	-	-
Brass burners		-	-	-
Pan supports type: Cast iron / Enamelled		-	-	• / -
Electronic one-touch ignition		-	-	•
Safety valves		-	-	•
Wok ring		-	-	•
Simmer ring		-	-	-
Maximum gas power	W	-	-	3800
Gas adjustment: Natural gas (G20) / LPG (G30)		-	-	▲ / ▲
Electric plates	n	-	-	-
Normal 180 mm	n -- W	-	-	-
Rapid 180 mm	n -- W	-	-	-
Normal 145 mm	n -- W	-	-	-
Rapid 145 mm	n -- W	-	-	-
Electric ceramic zones	n	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 145 mm	n -- W	-	-	-
Hi-light 140/210 mm	n -- W	-	-	-
Hi-light 120/180 mm	n -- W	-	-	-
Hi-light 140x250 mm	n -- W	-	-	-
Hi-light 170x265 mm	n -- W	-	-	-
Electric induction zones	n	-	1	-
Induction 160 mm	n -- W	-	-	-
Induction 210 mm	n -- W	-	-	-
Induction 145 mm	n -- W	-	-	-
Induction 260 mm	n -- W	-	-	-
Induction 200 mm	n -- W	-	-	-
Induction 210x180 mm	n -- W	-	-	-
Wok cooking area 300 mm	n -- W	-	1 -- 2400 / 3000	-
Power levels	n	-	9	-
Touch control		-	•	-
Slider control		-	-	-
Bridge function		-	-	-
Turbo boost		-	•	-
Programmable cooking times		-	-	-
Timer		-	•	-
Power management		-	-	-
3 preset cooking temperatures (melting/simmering/boiling)		-	-	-
Pause / recall		-	-	-
Command lock		-	•	-
Pot diameter detection		-	•	-
Anti-spill safety		-	•	-
Automatic switch-off		-	•	-
Hob operating warning light		•	-	-
Residual heat indicator		•	•	-
Stainless steel teppan yaki surface		•	-	-
Lavic stone		-	-	-
Fryer capacity min/max	lt	-	-	-
Removable stainless steel basket		-	-	-
Oil temperature indicator		-	-	-
Domino joint kit		-	-	▲
Scraper		-	-	-
Power cord		•	•	•
Maximum electric power	W	2500	3000	0,6
Voltage -- Frequency	V -- Hz	230/240 -- 50/60	230/240 -- 50/60	230/240 -- 50/60

MODEL		PN34GVF2GB	PN34IT2B	PN34FB
Style		NEXT	NEXT	NEXT
Colours		BL	BL	BL
Deco accents		-	-	-
Width	cm	34	34	34
Gas burners	n	2	-	-
Wok burner	n -- W	-	-	-
Rapid	n -- W	-	-	-
Semi-rapid	n -- W	I -- 1750	-	-
Auxiliary	n -- W	I -- 1000	-	-
Brass burners		-	-	-
Pan supports type: Cast iron / Enamelled		• / -	-	-
Electronic one-touch ignition		•	-	-
Safety valves		•	-	-
Wok ring		-	-	-
Simmer ring		-	-	-
Maximum gas power	W	2750	-	-
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	-	-
Electric plates	n	-	-	-
Normal 180 mm	n -- W	-	-	-
Rapid 180 mm	n -- W	-	-	-
Normal 145 mm	n -- W	-	-	-
Rapid 145 mm	n -- W	-	-	-
Electric ceramic zones	n	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 145 mm	n -- W	-	-	-
Hi-light 140/210 mm	n -- W	-	-	-
Hi-light 120/180 mm	n -- W	-	-	-
Hi-light 140x250 mm	n -- W	-	-	-
Hi-light 170x265 mm	n -- W	-	-	-
Electric induction zones	n	-	2	-
Induction 160 mm	n -- W	-	I -- 1400	-
Induction 210 mm	n -- W	-	-	-
Induction 145 mm	n -- W	-	-	-
Induction 260 mm	n -- W	-	-	-
Induction 200 mm	n -- W	-	I -- 2300	-
Induction 210x180 mm	n -- W	-	-	-
Wok cooking area 300 mm	n -- W	-	-	-
Power levels	n	-	9	-
Touch control		-	•	-
Slider control		-	-	-
Bridge function		-	-	-
Turbo boost		-	-	-
Programmable cooking times		-	-	-
Timer		-	•	-
Power management		-	-	-
3 preset cooking temperatures (melting/simmering/boiling)		-	-	-
Pause / recall		-	-	-
Command lock		-	•	-
Pot diameter detection		-	-	-
Anti-spill safety		-	-	-
Automatic switch-off		-	-	-
Hob operating warning light		-	•	•
Residual heat indicator		-	-	-
Stainless steel teppan yaki surface		-	-	-
Lavic stone		-	-	-
Fryer capacity min/max	lt	-	-	2,0 / 2,5
Removable stainless steel basket		-	-	•
Oil temperature indicator		-	-	•
Domino joint kit		▲	▲	▲
Scraper		-	▲	-
Power cord		•	•	•
Maximum electric power	W	0,6	3700	2300
Voltage -- Frequency	V -- Hz	230/240 -- 50/60	230/240 -- 50/60	230/240 -- 50/60

MODEL		PN34BB	PD90GVF5TG...	PD75GVF5TG...
Style		NEXT	DECO	DECO
Colours		BL	X , B , A , E	X , B , A , E
Deco accents		-	B , O , C	B , O , C
Width	cm	34	90	75
Gas burners	n	-	5	5
Wok burner	n -- W	-	1 -- 3800	1 -- 3800
Rapid	n -- W	-	1 -- 3000	1 -- 3000
Semi-rapid	n -- W	-	2 -- 1750	2 -- 1750
Auxiliary	n -- W	-	1 -- 1000	1 -- 1000
Brass burners		-	-	-
Pan supports type: Cast iron / Enamelled		-	• / -	• / -
Electronic one-touch ignition		-	•	•
Safety valves		-	•	•
Wok ring		-	▲	▲
Simmer ring		-	▲	▲
Maximum gas power	W	-	11300	11300
Gas adjustment: Natural gas (G20) / LPG (G30)		-	▲ / ▲	▲ / ▲
Electric plates	n	-	-	-
Normal 180 mm	n -- W	-	-	-
Rapid 180 mm	n -- W	-	-	-
Normal 145 mm	n -- W	-	-	-
Rapid 145 mm	n -- W	-	-	-
Electric ceramic zones	n	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 145 mm	n -- W	-	-	-
Hi-light 140/210 mm	n -- W	-	-	-
Hi-light 120/180 mm	n -- W	-	-	-
Hi-light 140x250 mm	n -- W	-	-	-
Hi-light 170x265 mm	n -- W	-	-	-
Electric induction zones	n	-	-	-
Induction 160 mm	n -- W	-	-	-
Induction 210 mm	n -- W	-	-	-
Induction 145 mm	n -- W	-	-	-
Induction 260 mm	n -- W	-	-	-
Induction 200 mm	n -- W	-	-	-
Induction 210x180 mm	n -- W	-	-	-
Wok cooking area 300 mm	n -- W	-	-	-
Power levels	n	10	-	-
Touch control		-	-	-
Slider control		-	-	-
Bridge function		-	-	-
Turbo boost		-	-	-
Programmable cooking times		-	-	-
Timer		-	-	-
Power management		-	-	-
3 preset cooking temperatures (melting/simmering/boiling)		-	-	-
Pause / recall		-	-	-
Command lock		-	-	-
Pot diameter detection		-	-	-
Anti-spill safety		-	-	-
Automatic switch-off		-	-	-
Hob operating warning light		•	-	-
Residual heat indicator		-	-	-
Stainless steel teppan yaki surface		-	-	-
Lavic stone		•	-	-
Fryer capacity min/max	lt	-	-	-
Removable stainless steel basket		-	-	-
Oil temperature indicator		-	-	-
Domino joint kit		▲	-	-
Scraper		-	-	-
Power cord		•	•	•
Maximum electric power	W	2400	0,6	0,6
Voltage -- Frequency	V -- Hz	230/240 -- 50/60	230/240 -- 50/60	230/240 -- 50/60

MODEL		PD60GVF4FG...	PD60GVF4G...	PD45GVF3LG...
Style		DECO	DECO	DECO
Colours		X , B , A , E	B , A , E	B , A , E
Deco accents		B , O , C	B , O , C	B , O , C
Width	cm	60	60	45
Gas burners	n	4	4	3
Wok burner	n -- W	1 -- 3800	-	1 -- 3800
Rapid	n -- W	-	1 -- 3000	-
Semi-rapid	n -- W	2 -- 1750	2 -- 1750	1 -- 1750
Auxiliary	n -- W	1 -- 1000	1 -- 1000	1 -- 1000
Brass burners		-	-	-
Pan supports type: Cast iron / Enamelled		• / -	• / -	• / -
Electronic one-touch ignition		•	•	•
Safety valves		•	•	•
Wok ring		▲	▲	•
Simmer ring		▲	▲	•
Maximum gas power	W	8300	7500	6550
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	▲ / ▲	▲ / ▲
Electric plates	n	-	-	-
Normal 180 mm	n -- W	-	-	-
Rapid 180 mm	n -- W	-	-	-
Normal 145 mm	n -- W	-	-	-
Rapid 145 mm	n -- W	-	-	-
Electric ceramic zones	n	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 145 mm	n -- W	-	-	-
Hi-light 140/210 mm	n -- W	-	-	-
Hi-light 120/180 mm	n -- W	-	-	-
Hi-light 140x250 mm	n -- W	-	-	-
Hi-light 170x265 mm	n -- W	-	-	-
Electric induction zones	n	-	-	-
Induction 160 mm	n -- W	-	-	-
Induction 210 mm	n -- W	-	-	-
Induction 145 mm	n -- W	-	-	-
Induction 260 mm	n -- W	-	-	-
Induction 200 mm	n -- W	-	-	-
Induction 210x180 mm	n -- W	-	-	-
Wok cooking area 300 mm	n -- W	-	-	-
Power levels	n	-	-	-
Touch control		-	-	-
Slider control		-	-	-
Bridge function		-	-	-
Turbo boost		-	-	-
Programmable cooking times		-	-	-
Timer		-	-	-
Power management		-	-	-
3 preset cooking temperatures (melting/simmering/boiling)		-	-	-
Pause / recall		-	-	-
Command lock		-	-	-
Pot diameter detection		-	-	-
Anti-spill safety		-	-	-
Automatic switch-off		-	-	-
Hob operating warning light		-	-	-
Residual heat indicator		-	-	-
Stainless steel teppan yaki surface		-	-	-
Lavic stone		-	-	-
Fryer capacity min/max	lt	-	-	-
Removable stainless steel basket		-	-	-
Oil temperature indicator		-	-	-
Domino joint kit		-	-	-
Scraper		-	-	-
Power cord		•	•	•
Maximum electric power	W	0,6	0,6	0,6
Voltage -- Frequency	V -- Hz	230/240 -- 50/60	230/240 -- 50/60	230/240 -- 50/60

COOKERS

MODEL		PSIX12G6VC	PI...12GE5VC	PI...16G5VC
Style		PRO	PRO	PRO
Colour		X	X, B, C, G, R	X, B, C, G, R
Deco accents		-	-	-
Width	cm	120	120	100
Level		I	I	I
Gas burners	n	6	5	5
Wok burner	n -- W	2 -- 5000	1 -- 5000	1 -- 5000
Rapid	n -- W	-	1 -- 3000	1 -- 3000
Semi-rapid	n -- W	2 -- 1800	2 -- 1800	2 -- 1800
Auxiliary	n -- W	2 -- 1000	1 -- 1000	1 -- 1000
Brass burners		•	•	•
Pan supports type: Cast iron / Enamelled		• / -	• / -	• / -
Electronic one-touch ignition		•	•	•
Safety valves		•	•	•
Wok ring		•	•	•
Simmer ring		▲	▲	▲
Maximum gas power	W	15600	12600	12600
Electric ceramic zones	n	-	-	-
Hi-light 210 mm	n -- W	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 140 mm	n -- W	-	-	-
Hi-light extensible 140/210 mm	n -- W	-	-	-
Hi-light oval 190x285 mm	n -- W	-	-	-
Hi-light oval 145X250 mm	n -- W	-	-	-
Residual heat indicators		-	-	-
Cast iron electric griddle / Stainless steel electric griddle		-	• / ▲	-
Maximum electric power	W	-	1650	-
Glass lid / splashback		- / •	- / •	- / •
Ovens	n	1	2	1
4-fan oven		-	-	-
Main oven type:				
Electric multifunction		-	-	-
Electric conventional		-	-	-
Gas convection oven with electric grill		-	-	-
Gas convection oven with gas grill		-	•	•
Gas oven with electric grill		-	-	-
Gas oven with gas grill		•	-	-
Independent gas grill control		▲	▲	▲
Auxiliary oven type:		-	-	-
Electric conventional with grill		-	•	-
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	-	-
Energy efficiency class*		-	- / A	-
Cavity volume	lt	200	112 / 42	118
Functions	n	2	3 / 2	3
Programmer:				
Analog thermometer		•	• / -	•
Digital thermometer / food probe		-	-	-
Touch control		-	-	-
Analog clock		-	-	-
Analog cut-off timer 120'		-	-	-
Minute minder 60'		-	-	-
Maximum oven power	W	7400	3900 / 1370	4800
Grill power	W	4500	3200 / 1100	4700
Maximum cooking temperature	°C	260	260 / 250	260
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		• / •	• / •	• / •
Cooling fan		•	•	•
Patented cool doors with easy removable glasses / N. glasses		• / 2	• / 3	• / 3
Oven lights	n	1	1 / 1	1
Roasting spit		•	• / -	•
Wire shelves	n	1	2 / 1	2
Enamelled trays	n	1	1 / 1	1
Telescopic rails	n	-	-	-
Catalytic liners		-	▲	▲
Storage compartment		-	-	-
Adjustable feet		•	-	•
Stainless steel toe kick		-	•	•
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	▲ / ▲	▲ / ▲
Voltage -- Frequency	V -- Hz	220-240 -- 50 / 60	220-240 -- 50 / 60	220-240 -- 50 / 60

* According to Standard EN 50304

MODEL		PGI...96M5VC	PI96MM5VC	PI...96G5VC
Style		PRO	PRO	PRO
Colour		X, B, C, G, R	X, B, C, G, R	X, B, C, G, R
Deco accents		-	-	-
Width	cm	90	90	90
Level		I	I	I
Gas burners	n	5	5	5
Wok burner	n -- W	1 -- 5000	1 -- 5000	1 -- 5000
Rapid	n -- W	1 -- 3000	1 -- 3000	1 -- 3000
Semi-rapid	n -- W	2 -- 1800	2 -- 1800	2 -- 1800
Auxiliary	n -- W	1 -- 1000	1 -- 1000	1 -- 1000
Brass burners		•	•	•
Pan supports type: Cast iron / Enamelled		• / -	• / -	• / -
Electronic one-touch ignition		•	•	•
Safety valves		•	•	•
Wok ring		•	•	•
Simmer ring		▲	▲	▲
Maximum gas power	W	12600	12600	12600
Electric ceramic zones	n	-	-	-
Hi-light 210 mm	n -- W	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 140 mm	n -- W	-	-	-
Hi-light extensible 140/210 mm	n -- W	-	-	-
Hi-light oval 190x285 mm	n -- W	-	-	-
Hi-light oval 145X250 mm	n -- W	-	-	-
Residual heat indicators		-	-	-
Cast iron electric griddle / Stainless steel electric griddle		-	-	-
Maximum electric power	W	-	-	-
Glass lid / splashback		- / •	- / •	- / •
Ovens	n	1	2	1
4-fan oven		•	-	-
Main oven type:				
Electric multifunction		-	-	-
Electric conventional		-	-	-
Gas convection oven with electric grill		-	•	-
Gas convection oven with gas grill		•	-	•
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	-	-
Independent gas grill control		-	-	▲
Auxiliary oven type:				
Electric conventional with grill		-	-	-
Gas oven with electric grill		-	•	-
Gas oven with gas grill		-	-	-
Energy efficiency class*		-	-	-
Cavity volume	lt	150	65 / 42	118
Functions	n	5	5 / 2	3
Programmer:				
Analog thermometer		•	• / -	•
Digital thermometer / food probe			-	-
Touch control		-	-	-
Analog clock		-	-	-
Analog cut-off timer 120'		-	-	-
Minute minder 60'		-	-	-
Maximum oven power	W	5000	2500 / 1700	4800
Grill power	W	1850	1860 / 1120	4700
Maximum cooking temperature	°C	260	260 / 260	260
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		• / •	• / •	• / •
Cooling fan		•	•	•
Patented cool doors with easy removable glasses / N. glasses		• / 2	• / 3	• / 3
Oven lights	n	1	1 / 1	1
Roasting spit		-	-	•
Wire shelves	n	2	2 / 1	2
Enamelled trays	n	1	1 / 1	1
Telescopic rails	n	-	-	-
Catalytic liners		▲	▲	▲
Storage compartment		-	-	-
Adjustable feet		•	•	•
Stainless steel toe kick		•	•	•
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	▲ / ▲	▲ / ▲
Voltage -- Frequency	V -- Hz	220-240 -- 50 / 60	220-240 -- 50 / 60	220-240 -- 50 / 60

* According to Standard EN 50304

COOKERS

MODEL		P2...96E5VC	PP3X96G5VC	P3...96G5VE
Style		PRO	PRO	PRO
Colour		X , B , C , G , R	X	X , W
Deco accents		-	-	-
Width	cm	90	90	90
Level		2	3	3
Gas burners	n	5	5	5
Wok burner	n -- W	1 -- 5000	1 -- 5000	1 -- 3800
Rapid	n -- W	1 -- 3000	1 -- 3000	1 -- 3000
Semi-rapid	n -- W	2 -- 1800	2 -- 1800	2 -- 1800
Auxiliary	n -- W	1 -- 1000	1 -- 1000	1 -- 1000
Brass burners		-	•	-
Pan supports type: Cast iron / Enamelled		• / -	• / -	- / •
Electronic one-touch ignition		•	•	•
Safety valves		•	•	•
Wok ring		▲	•	-
Simmer ring		▲	▲	▲
Maximum gas power	W	12600	12600	11300
Electric ceramic zones	n	-	-	-
Hi-light 210 mm	n -- W	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 140 mm	n -- W	-	-	-
Hi-light extensible 140/210 mm	n -- W	-	-	-
Hi-light oval 190x285 mm	n -- W	-	-	-
Hi-light oval 145X250 mm	n -- W	-	-	-
Residual heat indicators		-	-	-
Cast iron electric griddle / Stainless steel electric griddle		-	-	-
Maximum electric power	W	-	-	-
Glass lid / splashback		- / •	- / •	• / -
Ovens	n	1	1	1
4-fan oven		-	-	-
Main oven type:				
Electric multifunction		•	-	-
Electric conventional		-	-	-
Gas convection oven with electric grill		-	-	-
Gas convection oven with gas grill		-	-	-
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	•	•
Independent gas grill control		-	▲	▲
Auxiliary oven type:				
Electric conventional with grill		-	-	-
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	-	-
Energy efficiency class*		A	-	-
Cavity volume	lt	110	118	118
Functions	n	8	2	2
Programmer:				
Analog thermometer		-	-	-
Digital thermometer / food probe		-	-	-
Touch control		-	-	-
Analog clock		•	-	-
Analog cut-off timer 120'		-	-	-
Minute minder 60'		-	•	•
Maximum oven power	W	2820	4800	4800
Grill power	W	2060	4700	4700
Maximum cooking temperature	°C	250	260	260
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		• / •	• / •	• / -
Cooling fan		-	-	-
Patented cool doors with easy removable glasses / N. glasses		• / 2	• / 2	• / 2
Oven lights	n	1	1	1
Roasting spit		-	•	•
Wire shelves	n	2	1	1
Enamelled trays	n	1	1	1
Telescopic rails	n	▲	-	-
Catalytic liners		▲	▲	▲
Storage compartment		•	•	•
Adjustable feet		•	•	•
Stainless steel toe kick		-	-	-
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	▲ / ▲	▲ / ▲
Voltage -- Frequency	V -- Hz	220-240 -- 50 / 60	220-240 -- 50 / 60	220-240 -- 50 / 60

* According to Standard EN 50304

MODEL		PIX86E5VC	P2...85G5VE	P3...85G5VE
Style		PRO	PRO	PRO
Colour		X	X, B, C, G, R	X, W
Deco accents		-	-	-
Width	cm	80	80	80
Level		1	2	3
Gas burners	n	5	5	5
Wok burner	n -- W	1 -- 3800	1 -- 3800	1 -- 3800
Rapid	n -- W	1 -- 3000	1 -- 3000	1 -- 3000
Semi-rapid	n -- W	2 -- 1800	2 -- 1800	2 -- 1800
Auxiliary	n -- W	1 -- 1000	1 -- 1000	1 -- 1000
Brass burners		-	-	-
Pan supports type: Cast iron / Enamelled		• / -	- / •	- / •
Electronic one-touch ignition		•	•	•
Safety valves		•	•	•
Wok ring		•	-	-
Simmer ring		▲	▲	▲
Maximum gas power	W	11300	11300	11300
Electric ceramic zones	n	-	-	-
Hi-light 210 mm	n -- W	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 140 mm	n -- W	-	-	-
Hi-light extensible 140/210 mm	n -- W	-	-	-
Hi-light oval 190x285 mm	n -- W	-	-	-
Hi-light oval 145X250 mm	n -- W	-	-	-
Residual heat indicators		-	-	-
Cast iron electric griddle / Stainless steel electric griddle		-	-	-
Maximum electric power	W	-	-	-
Glass lid / splashback		- / •	- / •	• / -
Ovens	n	1	1	1
4-fan oven		-	-	-
Main oven type:				
Electric multifunction		•	-	-
Electric conventional		-	-	-
Gas convection oven with electric grill		-	-	-
Gas convection oven with gas grill		-	-	-
Gas oven with electric grill		-	•	-
Gas oven with gas grill		-	-	•
Independent gas grill control		-	-	▲
Auxiliary oven type:				
Electric conventional with grill		-	-	-
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	-	-
Energy efficiency class*		A	-	-
Cavity volume	lt	110	96	96
Functions	n	8	2	2
Programmer:				
Analog thermometer		•	-	-
Digital thermometer / food probe		-	-	-
Touch control		-	-	-
Analog clock		-	•	-
Analog cut-off timer 120'		-	-	-
Minute minder 60'		-	-	•
Maximum oven power	W	2440	3900	3900
Grill power	W	2040	2000	3200
Maximum cooking temperature	°C	250	260	260
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		• / •	• / •	• / -
Cooling fan		-	-	-
Patented cool doors with easy removable glasses / N. glasses		• / 3	• / 2	• / 2
Oven lights	n	1	1	1
Roasting spit		-	•	•
Wire shelves	n	1	1	1
Enamelled trays	n	1	1	1
Telescopic rails	n	▲	-	-
Catalytic liners		▲	▲	▲
Storage compartment		-	•	•
Adjustable feet		•	•	•
Stainless steel toe kick		•	-	-
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	▲ / ▲	▲ / ▲
Voltage -- Frequency	V -- Hz	220-240 -- 50 / 60	220-240 -- 50 / 60	220-240 -- 50 / 60

* According to Standard EN 50304

COOKERS

MODEL		PIX76E5VC	PI...66M4VC	P2X66E4VC
Style		PRO	PRO	PRO
Colour		X	X, B, C, G, R	X
Deco accents		-	-	-
Width	cm	70	60	60
Level		I	I	I
Gas burners	n	5	4	4
Wok burner	n -- W	1 -- 3800	1 -- 3300	1 -- 3300
Rapid	n -- W	1 -- 3000	-	-
Semi-rapid	n -- W	2 -- 1800	2 -- 1800	2 -- 1800
Auxiliary	n -- W	1 -- 1000	1 -- 1000	1 -- 1000
Brass burners		-	-	-
Pan supports type: Cast iron / Enamelled		• / -	• / -	• / -
Electronic one-touch ignition		•	•	•
Safety valves		•	•	•
Wok ring		•	•	-
Simmer ring		▲	▲	▲
Maximum gas power	W	11300	7900	7900
Electric ceramic zones	n	-	-	-
Hi-light 210 mm	n -- W	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 140 mm	n -- W	-	-	-
Hi-light extensible 140/210 mm	n -- W	-	-	-
Hi-light oval 190x285 mm	n -- W	-	-	-
Hi-light oval 145X250 mm	n -- W	-	-	-
Residual heat indicators		-	-	-
Cast iron electric griddle / Stainless steel electric griddle		-	-	-
Maximum electric power	W	-	-	-
Glass lid / splashback		- / •	- / •	- / •
Ovens	n	1	1	1
4-fan oven		-	-	-
Main oven type:				
Electric multifunction		•	-	•
Electric conventional		-	-	-
Gas convection oven with electric grill		-	•	-
Gas convection oven with gas grill		-	-	-
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	-	-
Independent gas grill control		-	-	-
Auxiliary oven type:		-	-	-
Electric conventional with grill		-	-	-
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	-	-
Energy efficiency class*		A	-	A
Cavity volume	lt	65	65	65
Functions	n	8	5	8
Programmer:				
Analog thermometer		•	•	-
Digital thermometer / food probe		-	-	-
Touch control		-	-	-
Analog clock		-	-	•
Analog cut-off timer 120'		-	-	-
Minute minder 60'		-	-	-
Maximum oven power	W	2060	2500	2060
Grill power	W	1860	1860	1860
Maximum cooking temperature	°C	250	260	250
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		• / •	• / •	• / •
Cooling fan		•	•	-
Patented cool doors with easy removable glasses / N. glasses		• / 3	• / 3	• / 2
Oven lights	n	1	1	1
Roasting spit		-	-	-
Wire shelves	n	2	2	2
Enamelled trays	n	1	1	1
Telescopic rails	n	▲	▲	▲
Catalytic liners		▲	▲	▲
Storage compartment		-	-	•
Adjustable feet		•	•	•
Stainless steel toe kick		-	-	-
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	▲ / ▲	▲ / ▲
Voltage -- Frequency	V -- Hz	220-240 -- 50 / 60	220-240 -- 50 / 60	220-240 -- 50 / 60

* According to Standard EN 50304

MODEL		P3...66G4VE	NIX12GM5VC	NGIX96G5VC
Style		PRO	NEXT	NEXT
Colour		X ,W	X	X
Deco accents		-	-	-
Width	cm	60	120	90
Level		I	I	I
Gas burners	n	4	5	5
Wok burner	n -- W	1 -- 3300	1 -- 5000	1 -- 5000
Rapid	n -- W	-	1 -- 3000	1 -- 3000
Semi-rapid	n -- W	2 -- 1800	2 -- 1800	2 -- 1800
Auxiliary	n -- W	1 -- 1000	1 -- 1000	1 -- 1000
Brass burners		-	•	•
Pan supports type: Cast iron / Enamelled		- / •	• / -	• / -
Electronic one-touch ignition		•	•	•
Safety valves		•	•	•
Wok ring		-	•	•
Simmer ring		▲	▲	▲
Maximum gas power	W	7900	12600	12600
Electric ceramic zones	n	-	-	-
Hi-light 210 mm	n -- W	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 140 mm	n -- W	-	-	-
Hi-light extensible 140/210 mm	n -- W	-	-	-
Hi-light oval 190x285 mm	n -- W	-	-	-
Hi-light oval 145X250 mm	n -- W	-	-	-
Residual heat indicators		-	-	-
Cast iron electric griddle / Stainless steel electric griddle		-	• / ▲	-
Maximum electric power	W	-	1650	-
Glass lid / splashback		• / -	- / •	- / •
Ovens	n	1	2	1
4-fan oven		-	-	•
Main oven type:				
Electric multifunction		-	-	-
Electric conventional		-	-	-
Gas convection oven with electric grill		-	-	-
Gas convection oven with gas grill		-	•	•
Gas oven with electric grill		-	-	-
Gas oven with gas grill		•	-	-
Independent gas grill control		-	▲	▲
Auxiliary oven type:				
Electric conventional with grill		-	-	-
Gas oven with electric grill		-	•	-
Gas oven with gas grill		-	-	-
Energy efficiency class*		-	- / -	-
Cavity volume	lt	65	112 / 42	150
Functions	n	2	3 / 2	3
Programmer:				
Analog thermometer		-	- / -	-
Digital thermometer / food probe		-	• / •	• / •
Touch control		-	-	-
Analog clock		-	-	-
Analog cut-off timer 120'		-	-	-
Minute minder 60'		•	-	-
Maximum oven power	W	2500	3900 / 1700	5000
Grill power	W	2400	3200 / 1120	3000
Maximum cooking temperature	°C	260	260 / 260	260
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		• / -	• / •	• / •
Cooling fan		-	•	•
Patented cool doors with easy removable glasses / N. glasses		• / 2	• / 3	• / 2
Oven lights	n	1	1 / 1	1
Roasting spit		-	• / -	•
Wire shelves	n	1	2 / 1	2
Enamelled trays	n	1	1 / 1	1
Telescopic rails	n	-	-	-
Catalytic liners		-	▲	▲
Storage compartment		-	-	-
Adjustable feet		•	-	•
Stainless steel toe kick		-	•	•
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	▲ / ▲	▲ / ▲
Voltage -- Frequency	V -- Hz	220-240 -- 50 / 60	220-240 -- 50 / 60	220-240 -- 50 / 60

* According to Standard EN 50304

COOKERS

MODEL		NIX96EEVTC	NIX96M5VC	N2X96G5VC
Style		NEXT	NEXT	NEXT
Colour		X	X	X
Deco accents		-	-	-
Width	cm	90	90	90
Level		I	I	I
Gas burners	n	-	5	5
Wok burner	n -- W	-	1 -- 5000	1 -- 5000
Rapid	n -- W	-	1 -- 3000	1 -- 3000
Semi-rapid	n -- W	-	2 -- 1800	2 -- 1800
Auxiliary	n -- W	-	1 -- 1000	1 -- 1000
Brass burners		-	•	-
Pan supports type: Cast iron / Enamelled		- / -	• / -	• / -
Electronic one-touch ignition		-	•	•
Safety valves		-	•	•
Wok ring		-	•	▲
Simmer ring		▲	▲	▲
Maximum gas power	W	-	12600	12600
Electric ceramic zones	n	-	-	-
Hi-light 210 mm	n -- W	1 -- 2100	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 140 mm	n -- W	2 -- 1200	-	-
Hi-light extensible 140/210 mm	n -- W	1 -- 1200/2200	-	-
Hi-light oval 190x285 mm	n -- W	1 -- 1200/2200	-	-
Hi-light oval 145X250 mm	n -- W	-	-	-
Residual heat indicators		•	-	-
Cast iron electric griddle / Stainless steel electric griddle		-	-	-
Maximum electric power	W	8900	-	-
Glass lid / splashback		- / •	- / •	- / •
Ovens	n	2	1	1
4-fan oven		-	-	-
Main oven type:				
Electric multifunction		•	-	-
Electric conventional		-	-	-
Gas convection oven with electric grill		-	•	-
Gas convection oven with gas grill		-	-	•
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	-	-
Independent gas grill control		-	-	▲
Auxiliary oven type:				
Electric conventional with grill		•	-	-
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	-	-
Energy efficiency class*		A / A	-	-
Cavity volume	lt	65 / 42	118	118
Functions	n	8 / 2	5	3
Programmer:				
Analog thermometer		-	- / -	-
Digital thermometer / food probe		• / •	• / •	-
Touch control		-	-	•
Analog clock		-	-	-
Analog cut-off timer 120'		-	-	-
Minute minder 60'		-	-	-
Maximum oven power	W	2060 / 1370	4800	4800
Grill power	W	1860 / 1100	1860	4700
Maximum cooking temperature	°C	250 / 250	260	260
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		• / •	• / •	• / •
Cooling fan		•	•	-
Patented cool doors with easy removable glasses / N. glasses		• / 3	• / 3	• / 2
Oven lights	n	1 / 1	1	1
Roasting spit		-	•	•
Wire shelves	n	2 / 1	2	2
Enamelled trays	n	1 / 1	1	1
Telescopic rails	n	▲	-	-
Catalytic liners		▲	▲	▲
Storage compartment		-	-	•
Adjustable feet		•	•	•
Stainless steel toe kick		•	•	-
Gas adjustment: Natural gas (G20) / LPG (G30)		-	▲ / ▲	▲ / ▲
Voltage -- Frequency	V -- Hz	220-240 -- 50 / 60	220-240 -- 50 / 60	220-240 -- 50 / 60

* According to Standard EN 50304

MODEL		NG3X96G5VC	N3X96G5VE	N2X85E5VE
Style		NEXT	NEXT	NEXT
Colour		X	X	X
Deco accents		-	-	-
Width	cm	90	90	80
Level		3	3	2
Gas burners	n	5	5	5
Wok burner	n -- W	1 -- 5000	1 -- 3800	1 -- 3800
Rapid	n -- W	1 -- 3000	1 -- 3000	1 -- 3000
Semi-rapid	n -- W	2 -- 1800	2 -- 1800	2 -- 1800
Auxiliary	n -- W	1 -- 1000	1 -- 1000	1 -- 1000
Brass burners		-	-	-
Pan supports type: Cast iron / Enamelled		• / -	- / •	- / •
Electronic one-touch ignition		•	•	•
Safety valves		•	•	•
Wok ring		-	-	-
Simmer ring		▲	▲	▲
Maximum gas power	W	12600	11300	11300
Electric ceramic zones	n	-	-	-
Hi-light 210 mm	n -- W	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 140 mm	n -- W	-	-	-
Hi-light extensible 140/210 mm	n -- W	-	-	-
Hi-light oval 190x285 mm	n -- W	-	-	-
Hi-light oval 145X250 mm	n -- W	-	-	-
Residual heat indicators		-	-	-
Cast iron electric griddle / Stainless steel electric griddle		-	-	-
Maximum electric power	W	-	-	-
Glass lid / splashback		• / -	• / -	- / •
Ovens	n	1	1	1
4-fan oven		-	-	-
Main oven type:				
Electric multifunction		-	-	•
Electric conventional		-	-	-
Gas convection oven with electric grill		-	-	-
Gas convection oven with gas grill		•	-	-
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	•	-
Independent gas grill control		▲	▲	-
Auxiliary oven type:				
Electric conventional with grill		-	-	-
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	-	-
Energy efficiency class*		-	-	A
Cavity volume	lt	150	118	90
Functions	n	3	2	6
Programmer:				
Analog thermometer		-	-	-
Digital thermometer / food probe		-	-	-
Touch control		-	-	-
Analog clock		-	-	•
Analog cut-off timer 120'		-	-	-
Minute minder 60'		•	•	-
Maximum oven power	W	5000	4800	2440
Grill power	W	3000	4700	2060
Maximum cooking temperature	°C	260	260	250
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		• / •	• / -	• / •
Cooling fan		-	-	-
Patented cool doors with easy removable glasses / N. glasses		• / 2	• / 2	• / 2
Oven lights	n	1	1	1
Roasting spit		•	•	-
Wire shelves	n	2	1	2
Enamelled trays	n	1	1	1
Telescopic rails	n	-	-	▲
Catalytic liners		-	-	▲
Storage compartment		-	•	•
Adjustable feet		•	•	•
Stainless steel toe kick		-	-	-
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	▲ / ▲	▲ / ▲
Voltage -- Frequency	V -- Hz	220-240 -- 50 / 60	220-240 -- 50 / 60	220-240 -- 50 / 60

* According to Standard EN 50304

COOKERS

MODEL		N3X85M5VE	N1X76M5VC	N1X66EVTCT
Style		NEXT	NEXT	NEXT
Colour		X	X	X
Deco accents		-	-	-
Width	cm	80	70	60
Level		3	1	1
Gas burners	n	5	5	-
Wok burner	n -- W	1 -- 3800	1 -- 3800	-
Rapid	n -- W	1 -- 3000	1 -- 3000	-
Semi-rapid	n -- W	2 -- 1800	2 -- 1800	-
Auxiliary	n -- W	1 -- 1000	1 -- 1000	-
Brass burners		-	-	-
Pan supports type: Cast iron / Enamelled		- / •	• / -	- / -
Electronic one-touch ignition		•	•	-
Safety valves		•	•	-
Wok ring		-	•	-
Simmer ring		▲	▲	-
Maximum gas power	W	11300	11300	-
Electric ceramic zones	n	-	-	-
Hi-light 210 mm	n -- W	-	-	-
Hi-light 180 mm	n -- W	-	-	1 -- 1800
Hi-light 140 mm	n -- W	-	-	1 -- 1200
Hi-light extensible 140/210 mm	n -- W	-	-	1 -- 1200/2200
Hi-light oval 190x285 mm	n -- W	-	-	-
Hi-light oval 145X250 mm	n -- W	-	-	1 -- 700/1800
Residual heat indicators		-	-	•
Cast iron electric griddle / Stainless steel electric griddle		-	-	-
Maximum electric power	W	-	-	7000
Glass lid / splashback		• / -	- / •	- / •
Ovens	n	1	1	1
4-fan oven		-	-	-
Main oven type:				
Electric multifunction		-	-	•
Electric conventional		-	-	-
Gas convection oven with electric grill		-	•	-
Gas convection oven with gas grill		-	-	-
Gas oven with electric grill		•	-	-
Gas oven with gas grill		-	-	-
Independent gas grill control		-	-	-
Auxiliary oven type:		-	-	-
Electric conventional with grill		-	-	-
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	-	-
Energy efficiency class*		-	-	A
Cavity volume	lt	96	65	65
Functions	n	2	5	8
Programmer:				
Analog thermometer		-	-	-
Digital thermometer / food probe		-	• / •	• / •
Touch control		-	-	-
Analog clock		-	-	-
Analog cut-off timer 120'		-	-	-
Minute minder 60'		•	-	-
Maximum oven power	W	3900	2500	2060
Grill power	W	2020	1860	1860
Maximum cooking temperature	°C	260	260	250
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		• / •	• / •	• / •
Cooling fan		-	•	•
Patented cool doors with easy removable glasses / N. glasses		• / 2	• / 3	• / 3
Oven lights	n	1	1	1
Roasting spit		•	-	-
Wire shelves	n	1	2	2
Enamelled trays	n	1	1	1
Telescopic rails	n	-	▲	▲
Catalytic liners		▲	▲	▲
Storage compartment		•	-	-
Adjustable feet		•	•	•
Stainless steel toe kick		-	-	-
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	▲ / ▲	-
Voltage -- Frequency	V -- Hz	220-240 -- 50 / 60	220-240 -- 50 / 60	220-240 -- 50 / 60

* According to Standard EN 50304

MODEL		N2X66M4VC	N3X66G4VE	DI...I2EE5VC
Style		NEXT	NEXT	DECO
Colour		X	X	B, C, G, R
Deco accents		-	-	B, O, C
Width	cm	60	60	120
Level		I	I	I
Gas burners	n	4	4	5
Wok burner	n -- W	1 -- 3300	1 -- 3300	1 -- 5000
Rapid	n -- W	-	-	1 -- 3000
Semi-rapid	n -- W	2 -- 1800	2 -- 1800	2 -- 1800
Auxiliary	n -- W	1 -- 1000	1 -- 1000	1 -- 1000
Brass burners		-	-	•
Pan supports type: Cast iron / Enamelled		• / -	- / •	• / -
Electronic one-touch ignition		•	•	•
Safety valves		•	•	•
Wok ring		-	-	•
Simmer ring		▲	▲	▲
Maximum gas power	W	7900	7900	12600
Electric ceramic zones	n	-	-	-
Hi-light 210 mm	n -- W	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 140 mm	n -- W	-	-	-
Hi-light extensible 140/210 mm	n -- W	-	-	-
Hi-light oval 190x285 mm	n -- W	-	-	-
Hi-light oval 145X250 mm	n -- W	-	-	-
Residual heat indicators		-	-	-
Cast iron electric griddle / Stainless steel electric griddle		-	-	• / ▲
Maximum electric power	W	-	-	1650
Glass lid / splashback		- / •	• / -	- / •
Ovens	n	1	1	2
4-fan oven		-	-	-
Main oven type:				
Electric multifunction		-	-	•
Electric conventional		-	-	-
Gas convection oven with electric grill		•	-	-
Gas convection oven with gas grill		-	-	-
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	•	-
Independent gas grill control		-	-	-
Auxiliary oven type:		-	-	-
Electric conventional with grill		-	-	•
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	-	-
Energy efficiency class*		-	-	A / A
Cavity volume	lt	65	65	112 / 42
Functions	n	5	2	8 / 2
Programmer:				
Analog thermometer		-	-	• / -
Digital thermometer / food probe		-	-	-
Touch control		-	-	-
Analog clock		•	-	-
Analog cut-off timer 120'		-	-	-
Minute minder 60'		-	•	-
Maximum oven power	W	2500	2500	2920 / 1370
Grill power	W	1860	2400	2070 / 1100
Maximum cooking temperature	°C	260	260	250 / 250
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		• / •	• / -	• / •
Cooling fan		-	-	•
Patented cool doors with easy removable glasses / N. glasses		• / 2	• / 2	• / 3
Oven lights	n	1	1	1 / 1
Roasting spit		-	-	• / -
Wire shelves	n	2	1	2 / 1
Enamelled trays	n	1	1	1 / 1
Telescopic rails	n	▲	-	-
Catalytic liners		▲	-	▲
Storage compartment		•	-	-
Adjustable feet		•	•	-
Stainless steel toe kick		-	-	•
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	▲ / ▲	▲ / ▲
Voltage -- Frequency	V -- Hz	220-240 -- 50 / 60	220-240 -- 50 / 60	220-240 -- 50 / 60

* According to Standard EN 50304

COOKERS

MODEL		DI...96EE5VC	DI...96E5VC	D2...96G5VC
Style		DECO	DECO	DECO
Colour		B, C, G, R	B, C, G, R	B, C, G, R
Deco accents		B, O, C	B, O, C	B, O, C
Width	cm	90	90	90
Level		I	I	2
Gas burners	n	5	5	5
Wok burner	n -- W	I -- 5000	I -- 5000	I -- 5000
Rapid	n -- W	I -- 3000	I -- 3000	I -- 3000
Semi-rapid	n -- W	2 -- 1800	2 -- 1800	2 -- 1800
Auxiliary	n -- W	I -- 1000	I -- 1000	I -- 1000
Brass burners		•	•	-
Pan supports type: Cast iron / Enamelled		• / -	• / -	• / -
Electronic one-touch ignition		•	•	•
Safety valves		•	•	•
Wok ring		•	•	-
Simmer ring		▲	▲	▲
Maximum gas power	W	12600	12600	12600
Electric ceramic zones	n	-	-	-
Hi-light 210 mm	n -- W	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 140 mm	n -- W	-	-	-
Hi-light extensible 140/210 mm	n -- W	-	-	-
Hi-light oval 190x285 mm	n -- W	-	-	-
Hi-light oval 145X250 mm	n -- W	-	-	-
Residual heat indicators		-	-	-
Cast iron electric griddle / Stainless steel electric griddle		-	-	-
Maximum electric power	W	-	-	-
Glass lid / splashback		- / •	- / •	- / •
Ovens	n	2	I	I
4-fan oven		-	-	-
Main oven type:				
Electric multifunction		•	•	-
Electric conventional		-	-	-
Gas convection oven with electric grill		-	-	-
Gas convection oven with gas grill		-	-	•
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	-	-
Independent gas grill control		-	-	▲
Auxiliary oven type:				
Electric conventional with grill		•	-	-
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	-	-
Energy efficiency class*		A / A	A	-
Cavity volume	lt	65 / 42	110	118
Functions	n	8 / 2	8	3
Programmer:				
Analog thermometer		• / -	•	-
Digital thermometer / food probe		-	-	-
Touch control		-	-	-
Analog clock		-	-	•
Analog cut-off timer 120'		-	-	-
Minute minder 60'		-	-	-
Maximum oven power	W	2060 / 1370	2820	4800
Grill power	W	1860 / 1100	2060	4700
Maximum cooking temperature	°C	250 / 250	250	260
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		• / •	• / •	• / •
Cooling fan		•	•	-
Patented cool doors with easy removable glasses / N. glasses		• / 3	• / 3	• / 2
Oven lights	n	I / I	I	I
Roasting spit		-	•	•
Wire shelves	n	2 / I	2	2
Enamelled trays	n	I / I	I	I
Telescopic rails	n	▲	▲	-
Catalytic liners		▲	▲	▲
Storage compartment		-	-	•
Adjustable feet		•	•	•
Stainless steel toe kick		•	•	-
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	▲ / ▲	▲ / ▲
Voltage -- Frequency	V -- Hz	220-240 -- 50 / 60	220-240 -- 50 / 60	220-240 -- 50 / 60

* According to Standard EN 50304

MODEL		D3...96M5VE	D2...85G5VE	D3...85M5VE
Style		DECO	DECO	DECO
Colour		B, O, C	B, C, G, R	B, C
Deco accents			B, O, C	B, O, C
Width	cm	90	80	80
Level		3	2	3
Gas burners	n	5	5	5
Wok burner	n -- W	1 -- 3800	1 -- 3800	1 -- 3800
Rapid	n -- W	1 -- 3000	1 -- 3000	1 -- 3000
Semi-rapid	n -- W	2 -- 1800	2 -- 1800	2 -- 1800
Auxiliary	n -- W	1 -- 1000	1 -- 1000	1 -- 1000
Brass burners		-	-	-
Pan supports type: Cast iron / Enamelled		- / •	- / •	- / •
Electronic one-touch ignition		•	•	•
Safety valves		•	•	•
Wok ring		-	-	-
Simmer ring		▲	▲	▲
Maximum gas power	W	11300	11300	11300
Electric ceramic zones	n	-	-	-
Hi-light 210 mm	n -- W	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 140 mm	n -- W	-	-	-
Hi-light extensible 140/210 mm	n -- W	-	-	-
Hi-light oval 190x285 mm	n -- W	-	-	-
Hi-light oval 145X250 mm	n -- W	-	-	-
Residual heat indicators		-	-	-
Cast iron electric griddle / Stainless steel electric griddle		-	-	-
Maximum electric power	W	-	-	-
Glass lid / splashback		• / -	- / •	• / -
Ovens	n	1	1	1
4-fan oven		-	-	-
Main oven type:				
Electric multifunction		-	-	-
Electric conventional		-	-	-
Gas convection oven with electric grill		-	-	-
Gas convection oven with gas grill		-	-	-
Gas oven with electric grill		•	-	•
Gas oven with gas grill		-	•	-
Independent gas grill control		-	▲	-
Auxiliary oven type:				
Electric conventional with grill		-	-	-
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	-	-
Energy efficiency class*		-	-	-
Cavity volume	lt	118	96	96
Functions	n	2	2	2
Programmer:				
Analog thermometer		-	-	-
Digital thermometer / food probe		-	-	-
Touch control		-	-	-
Analog clock		-	•	-
Analog cut-off timer 120'		-	-	-
Minute minder 60'		•	-	•
Maximum oven power	W	4800	3900	3900
Grill power	W	1860	3200	2020
Maximum cooking temperature	°C	260	260	260
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		• / -	• / •	• / -
Cooling fan		-	-	-
Patented cool doors with easy removable glasses / N. glasses		• / 2	• / 2	• / 2
Oven lights	n	1	1	1
Roasting spit		•	•	•
Wire shelves	n	1	1	1
Enamelled trays	n	1	1	1
Telescopic rails	n	-	-	-
Catalytic liners		▲	▲	▲
Storage compartment		•	•	•
Adjustable feet		•	•	•
Stainless steel toe kick		-	-	-
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	▲ / ▲	▲ / ▲
Voltage -- Frequency	V -- Hz	220-240 -- 50 / 60	220-240 -- 50 / 60	220-240 -- 50 / 60

* According to Standard EN 50304

COOKERS

MODEL		D1...66M4VC	D2...66E4VC	D3...66G4VE
Style		DECO	DECO	DECO
Colour		B, C, G, R	B, C, G, R	B, C
Deco accents		B, O, C	B, O, C	B, O, C
Width	cm	60	60	60
Level		I	I	I
Gas burners	n	4	4	4
Wok burner	n -- W	I -- 3300	I -- 3300	I -- 3300
Rapid	n -- W	-	-	-
Semi-rapid	n -- W	2 -- 1800	2 -- 1800	2 -- 1800
Auxiliary	n -- W	I -- 1000	I -- 1000	I -- 1000
Brass burners		-	-	-
Pan supports type: Cast iron / Enamelled		• / -	• / -	- / •
Electronic one-touch ignition		•	•	•
Safety valves		•	•	•
Wok ring		•	-	-
Simmer ring		▲	▲	▲
Maximum gas power	W	7900	7900	7900
Electric ceramic zones	n	-	-	-
Hi-light 210 mm	n -- W	-	-	-
Hi-light 180 mm	n -- W	-	-	-
Hi-light 140 mm	n -- W	-	-	-
Hi-light extensible 140/210 mm	n -- W	-	-	-
Hi-light oval 190x285 mm	n -- W	-	-	-
Hi-light oval 145X250 mm	n -- W	-	-	-
Residual heat indicators		-	-	-
Cast iron electric griddle / Stainless steel electric griddle		-	-	-
Maximum electric power	W	-	-	-
Glass lid / splashback		- / •	- / •	• / -
Ovens	n	I	I	I
4-fan oven		-	-	-
Main oven type:				
Electric multifunction		-	•	-
Electric conventional		-	-	-
Gas convection oven with electric grill		•	-	-
Gas convection oven with gas grill		-	-	-
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	-	•
Independent gas grill control		-	-	-
Auxiliary oven type:				
Electric conventional with grill		-	-	-
Gas oven with electric grill		-	-	-
Gas oven with gas grill		-	-	-
Energy efficiency class*		-	A	-
Cavity volume	lt	65	65	65
Functions	n	5	8	2
Programmer:				
Analog thermometer		•	-	-
Digital thermometer / food probe		-	-	-
Touch control		-	-	-
Analog clock		-	•	-
Analog cut-off timer 120'		-	-	-
Minute minder 60'		-	-	•
Maximum oven power	W	2500	2060	2500
Grill power	W	1860	1860	2400
Maximum cooking temperature	°C	260	250	260
Easy To Clean (ETC) enamel / Smooth oven interior with easy removable side grids		• / •	• / •	• / -
Cooling fan		•	-	-
Patented cool doors with easy removable glasses / N. glasses		• / 3	• / 2	• / 2
Oven lights	n	I	I	I
Roasting spit		-	-	-
Wire shelves	n	2	2	I
Enamelled trays	n	I	I	I
Telescopic rails	n	▲	▲	-
Catalytic liners		▲	▲	-
Storage compartment		-	•	-
Adjustable feet		•	•	•
Stainless steel toe kick		-	-	-
Gas adjustment: Natural gas (G20) / LPG (G30)		▲ / ▲	▲ / ▲	▲ / ▲
Voltage -- Frequency	V -- Hz	220-240 -- 50 / 60	220-240 -- 50 / 60	220-240 -- 50 / 60

* According to Standard EN 50304

HOODS

MODEL		CPI90X	CPI60X	CP212X	CP290X	CP260X	CP312...
Style		PRO	PRO	PRO	PRO	PRO	PRO
Colours		X	X	X	X	X	X , B , C , G , R
Deco accents		-	-	-	-	-	-
Width	cm	90	60	120	90	60	120
Installation		Wall mount	Wall mount	Wall mount	Wall mount	Wall mount	Wall mount
Extraction hood		•	•	•	•	•	•
Height of fascia	cm	-	-	7	7	7	12
Depth	cm	42	42	48	48	48	48
Maximum aspiration capacity	m3/h	850	850	850	850	850	850
Speed settings	n	4	4	4	4	4	4
Halogen lights	n	2 x 20 W	2 x 20 W	2 x 20 W	2 x 20 W	2 x 20 W	2 x 20 W
Maximum noise level	dB(A)	58	58	58	58	58	58
Pressure	(Pa)	540	540	540	540	540	540
Maximum electric consumption	W	250	250	250	250	250	250
Air outlet flange diameter	mm	150 / 120	150 / 120	150 / 120	150 / 120	150 / 120	150 / 120
Stainless steel mesh filters	n	-	-	4	3	2	4
Stainless steel baffle filters	n	3	2	-	-	-	-
Controls		Electronic buttons	Electronic buttons	Electronic buttons	Electronic buttons	Electronic buttons	Electronic buttons
Automatic shut-off option		-	-	-	-	-	-
Timer		•	•	•	•	•	•
Adjustable stainless steel chimney		•	•	•	•	•	•
Fascia finishing		Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Stainless steel towel bar		-	-	▲	▲	▲	▲
Charcoal filters		▲	▲	▲	▲	▲	▲

HOODS

MODEL		CP390...	CP360...	CN112B	CN190B	CN160B	CN212X
Style		PRO	PRO	NEXT	NEXT	NEXT	NEXT
Colours		X , B , C , G , R	X , B , C , G , R	BL	BL	BL	X
Deco accents		-	-	-	-	-	-
Width	cm	90	60	120	90	60	120
Installation		Wall mount	Wall mount	Wall mount	Wall mount	Wall mount	Wall mount
Extraction hood		•	•	•	•	•	•
Height of fascia	cm	12	12	7	7	7	7
Depth	cm	48	48	48	48	48	48
Maximum aspiration capacity	m3/h	850	850	850	850	850	850
Speed settings	n	4	4	4	4	4	4
Halogen lights	n	2 x 20 W	2 x 20 W	2 x 20 W	2 x 20 W	2 x 20 W	2 x 20 W
Maximum noise level	dB(A)	58	58	58	58	58	58
Pressure	(Pa)	540	540	540	540	540	540
Maximum electric consumption	W	250	250	250	250	250	250
Air outlet flange diameter	mm	150 / 120	150 / 120	150 / 120	150 / 120	150 / 120	150 / 120
Stainless steel mesh filters	n	3	2	4	3	2	4
Stainless steel baffle filters	n	-	-	-	-	-	-
Controls		Electronic buttons	Electronic buttons	Analog knob	Analog knob	Analog knob	Analog knob
Automatic shut-off option		-	-	•	•	•	•
Timer		•	•	-	-	-	-
Adjustable stainless steel chimney		•	•	•	•	•	•
Fascia finishing		Stainless steel	Stainless steel	Black glass	Black glass	Black glass	Stainless steel
Stainless steel towel bar		▲	▲	▲	▲	▲	▲
Charcoal filters		▲	▲	▲	▲	▲	▲

HOODS

MODEL		CN290X	CN260X	CN312X	CN390X	CN360X	CDI 12...
Style		NEXT	NEXT	NEXT	NEXT	NEXT	DECO
Colours		X	X	X	X	X	B, C, G, R, A, E
Deco accents		-	-	-	-	-	B, O, C
Width	cm	90	60	120	90	60	120
Installation		Wall mount	Wall mount	Wall mount	Wall mount	Wall mount	Wall mount
Extraction hood		•	•	•	•	•	•
Height of fascia	cm	7	7	7	7	7	12
Depth	cm	48	48	48	48	48	48
Maximum aspiration capacity	m3/h	850	850	850	850	850	850
Speed settings	n	4	4	4	4	4	4
Halogen lights	n	2 x 20 W	2 x 20 W	2 x 20 W	2 x 20 W	2 x 20 W	2 x 20 W
Maximum noise level	dB(A)	58	58	58	58	58	58
Pressure	(Pa)	540	540	540	540	540	540
Maximum electric consumption	W	250	250	250	250	250	250
Air outlet flange diameter	mm	150 / 120	150 / 120	150 / 120	150 / 120	150 / 120	150 / 120
Stainless steel mesh filters	n	3	2	4	3	2	4
Stainless steel baffle filters	n	-	-	-	-	-	-
Controls		Analog knob	Analog knob	Electronic buttons	Electronic buttons	Electronic buttons	Analog knob
Automatic shut-off option		•	•	-	-	-	•
Timer		-	-	•	•	•	-
Adjustable stainless steel chimney		•	•	•	•	•	•
Fascia finishing		Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Stainless steel towel bar		▲	▲	▲	▲	▲	▲
Charcoal filters		▲	▲	▲	▲	▲	▲

HOODS

MODEL		CDI90...	CDI60...	CD212...	CD290...
Style		DECO	DECO	DECO	DECO
Colours		B , C , G , R , A , E	B , C , G , R , A , E	B , C , G , R , A , E	B , C , G , R , A , E
Deco accents		B , O , C	B , O , C	B , O , C	B , O , C
Width	cm	90	60	120	90
Installation		Wall mount	Wall mount	Wall mount	Wall mount
Extraction hood		•	•	•	•
Height of fascia	cm	12	12	12	12
Depth	cm	48	48	48	48
Maximum aspiration capacity	m3/h	850	850	850	850
Speed settings	n	4	4	4	4
Halogen lights	n	2 x 20 W	2 x 20 W	2 x 20 W	2 x 20 W
Maximum noise level	dB(A)	58	58	58	58
Pressure	(Pa)	540	540	540	540
Maximum electric consumption	W	250	250	250	250
Air outlet flange diameter	mm	150 / 120	150 / 120	150 / 120	150 / 120
Stainless steel mesh filters	n	3	2	4	3
Stainless steel baffle filters	n	-	-	-	-
Controls		Analog knob	Analog knob	Electronic buttons	Electronic buttons
Automatic shut-off option		•	•	-	-
Timer		-	-	•	•
Adjustable stainless steel chimney		•	•	•	•
Fascia finishing		Stainless steel	Stainless steel	Stainless steel	Stainless steel
Stainless steel towel bar		▲	▲	▲	▲
Charcoal filters		▲	▲	▲	▲

HOODS


MODEL		CD260...	CD312...	CD390...	CD360...
Style		DECO	DECO	DECO	DECO
Colours		B , C , G , R , A , E	B , C , G , R , A , E	B , C , G , R , A , E	B , C , G , R , A , E
Deco accents		B , O , C	B , O , C	B , O , C	B , O , C
Width	cm	60	120	90	60
Installation		Wall mount	Wall mount	Wall mount	Wall mount
Extraction hood		•	•	•	•
Height of fascia	cm	12	12	12	12
Depth	cm	48	48	48	48
Maximum aspiration capacity	m3/h	850	850	850	850
Speed settings	n	4	4	4	4
Halogen lights	n	2 x 20 W	2 x 20 W	2 x 20 W	2 x 20 W
Maximum noise level	dB(A)	58	58	58	58
Pressure	(Pa)	540	540	540	540
Maximum electric consumption	W	250	250	250	250
Air outlet flange diameter	mm	150 / 120	150 / 120	150 / 120	150 / 120
Stainless steel mesh filters	n	2	4	3	2
Stainless steel baffle filters	n	-	-	-	-
Controls		Electronic buttons	Electronic buttons	Electronic buttons	Electronic buttons
Automatic shut-off option		-	-	-	-
Timer		•	•	•	•
Adjustable stainless steel chimney		•	•	•	•
Fascia finishing		Stainless steel	Stainless steel	Stainless steel	Stainless steel
Stainless steel towel bar		▲	▲	▲	▲
Charcoal filters		▲	▲	▲	▲

LEGEND


Colours: X : Stainless steel BL : Black glossy B : Black matt C : Cream matt R : Red matt G : Green matt A : Oats E : Copper
 Accents: O : Gold B : Brass C : Chrome
 Symbols: • : standard equipment ▲ : available - : not available

INSTALLATION DRAWINGS


FP2K96M5
FN2K96G5
FN2K96E9

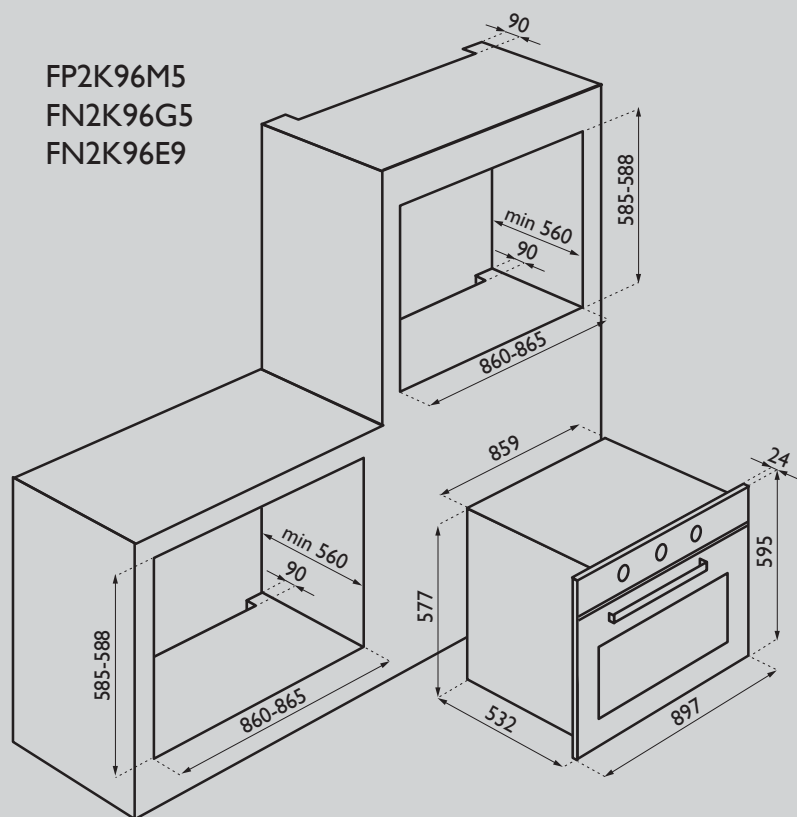


FN2K94E9X

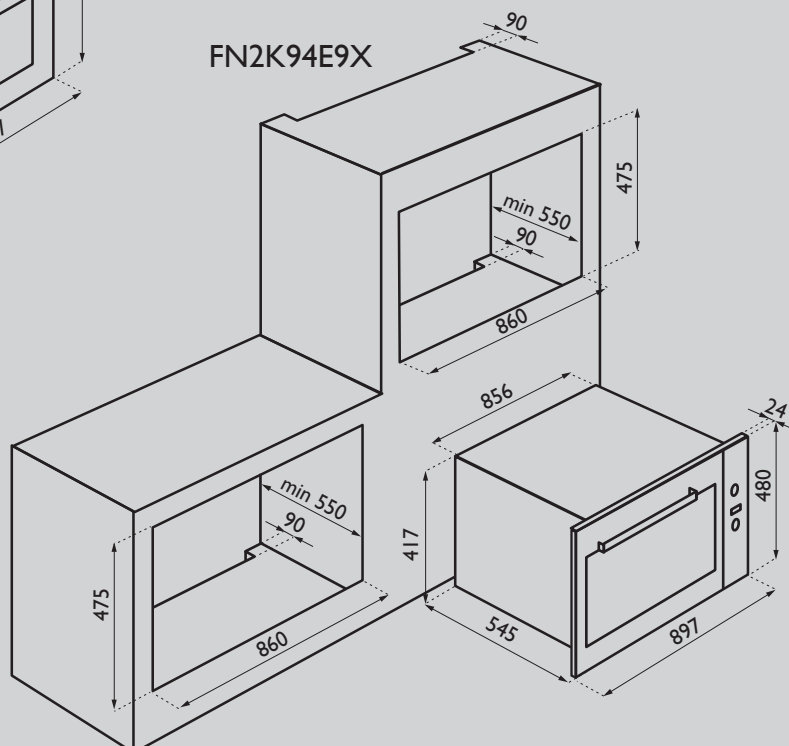

FP3K96M5X
FN3K96G5X

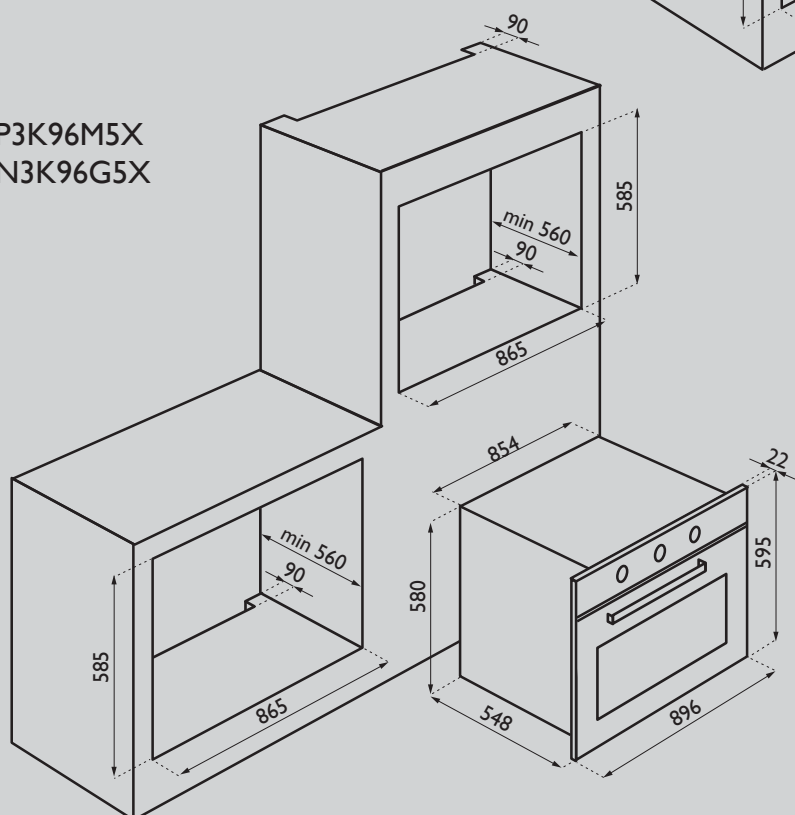

MN0K63B

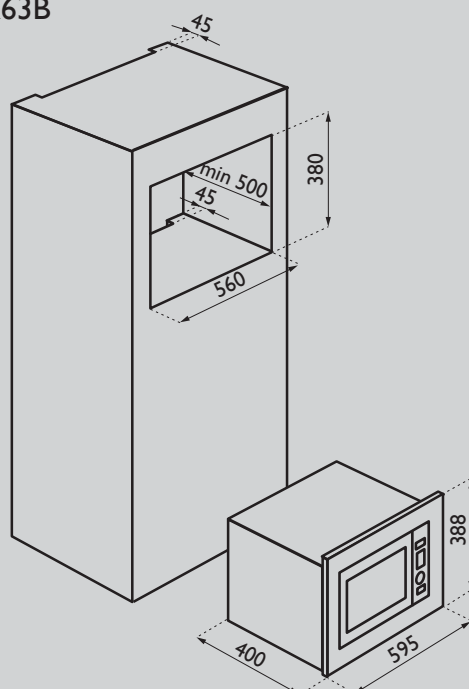

Technical drawing of the Bosch 66E9 refrigerator showing front and side views with dimensions.

Front View Dimensions:

- Top width: 40-50
- Right height: 583-585
- Internal width (min): min 560
- Internal width (range): 40-50
- Internal depth: 560
- Left height: 583-585
- Internal width (min): min 560
- Internal width (range): 40-50
- Internal depth: 560

Side View Dimensions:

- Top width: 549,5
- Right height: 600,3
- Internal width (min): min 560
- Internal width (range): 40-50
- Internal depth: 560
- Left height: 578,5
- Internal width (min): min 560
- Internal width (range): 40-50
- Internal depth: 560

Bottom View Dimensions:

- Width: 543,5
- Depth: 598


Technical drawing of the K66E11...7 refrigerator. The drawing shows the front and side views with the following dimensions:

- Top width: 40-50
- Internal width (top): min 560
- Internal width (bottom): 40-50
- Internal depth: 560
- Height: 587-589
- Bottom width: 543,5
- Depth: 598
- Height (bottom): 594
- Top depth: 549,5
- Internal width (bottom): min 560
- Internal width (top): 40-50
- Internal depth: 560
- Height: 587-589
- Bottom width: 543,5
- Depth: 598
- Height (bottom): 594
- Top depth: 549,5


Technical drawing showing the front and side views of the 6E5, 6M3, and 6E6 models. The front view shows a unit with a height of 590 mm and a width of 410 mm. The side view shows a unit with a height of 590 mm and a depth of 407 mm. The drawing also includes dimensions for the internal opening: min 550 mm height and 85-90 mm width. The side view shows a unit with a height of 595 mm and a depth of 447.4 mm. The front view shows a unit with a height of 590 mm and a width of 410 mm. The side view shows a unit with a height of 595 mm and a depth of 447.4 mm. The drawing also includes dimensions for the internal opening: min 550 mm height and 85-90 mm width.

Technical drawing of a rectangular box with dimensions: length 545, width 525, height 135, depth 595, and a small side flange 20.


PN90GVF5BLBX

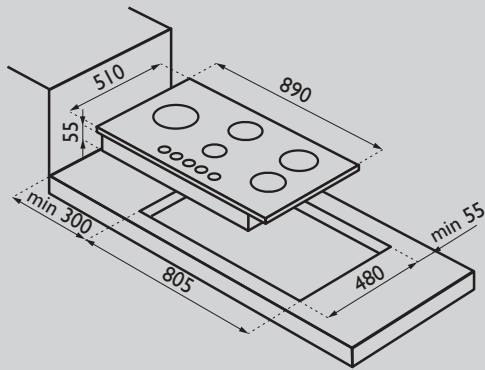


PN90GVF3BLBX

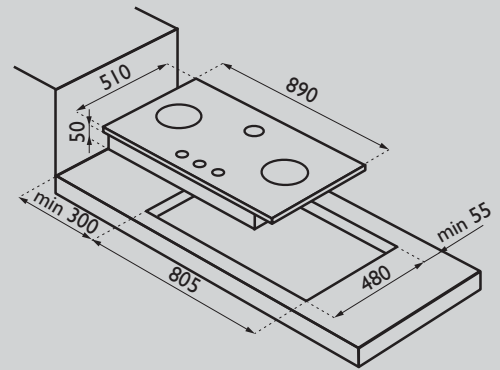


PP90GVF5TGX
PN90GVF5TGX
PD90GVF5TG

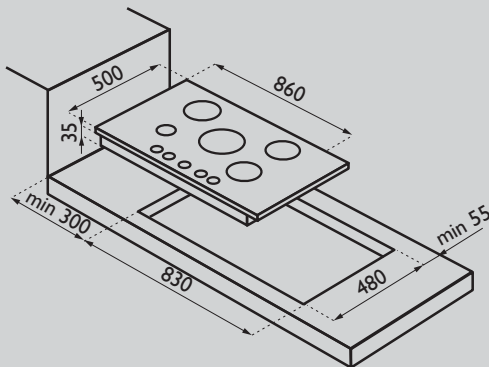


PN90IT5B

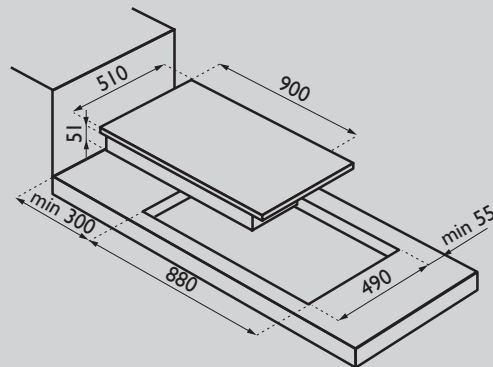


PN75GVF2BLBX

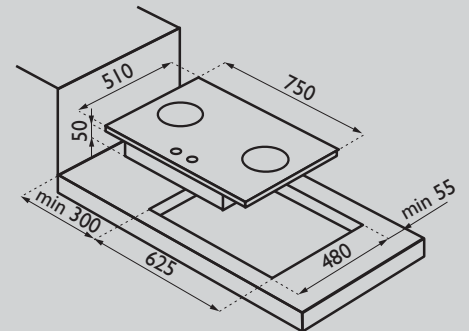


PN75GVF5BLBX

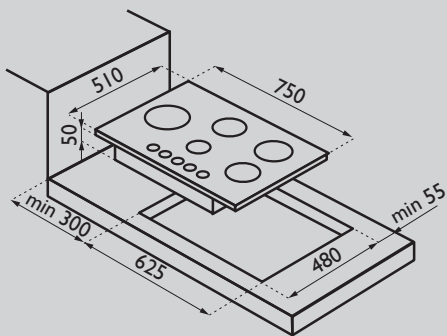


PP75GVF5TGX
PN75GVF5TGX
PD75GVF5TG

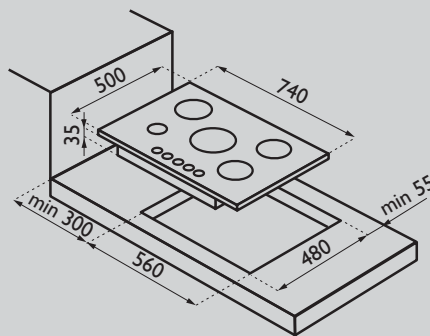


PN75IT4B

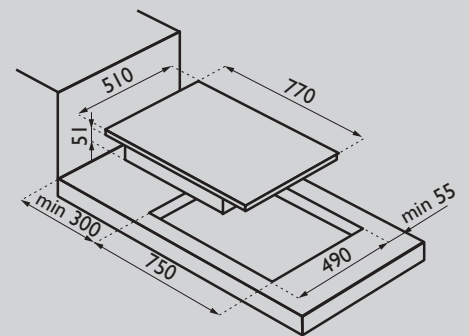


PN60GVF4FBX

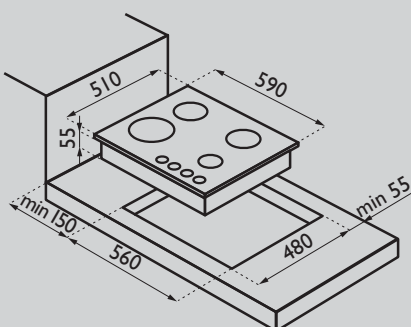


PN60GVF4FGX
PD60GVF4FG
PD60GVF4G

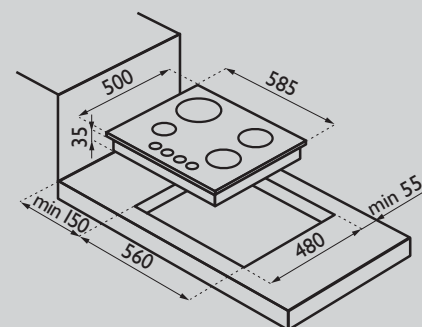


PN64IT4B

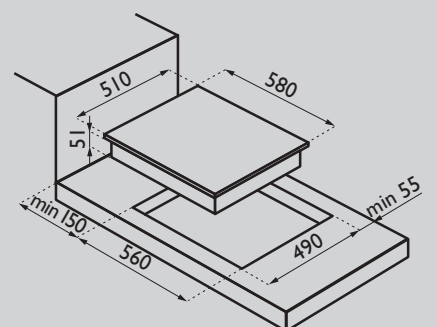


PN45GVF3LGX
PN45GVF3GB
PD45GVF3LG

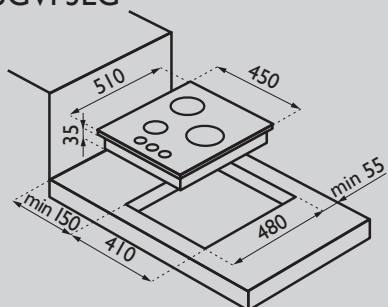


PN38GVFIT8BB

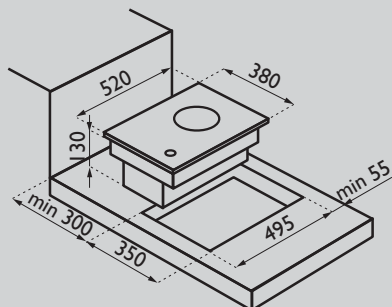


PN38GVF2BB

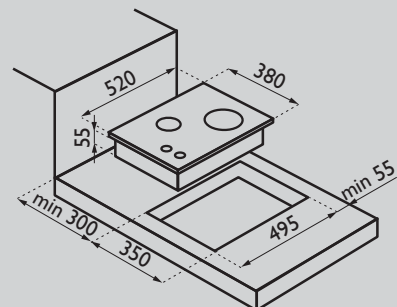


PN38IS2B

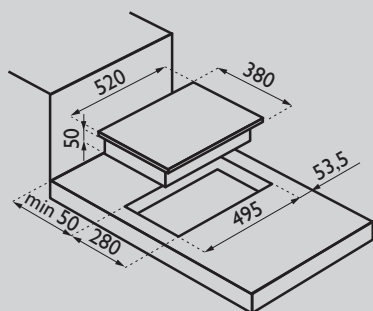


PN38TB

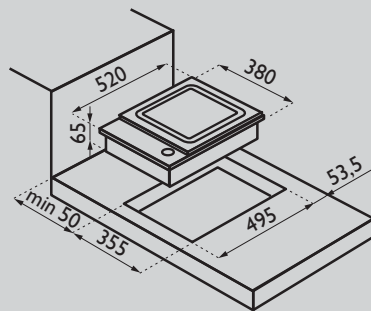


PN38WB

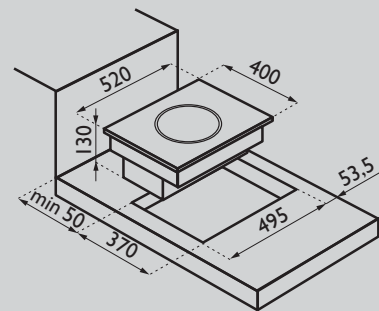


PN34GVFI GB

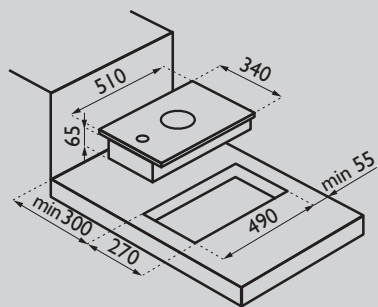


PN34GVF2GB

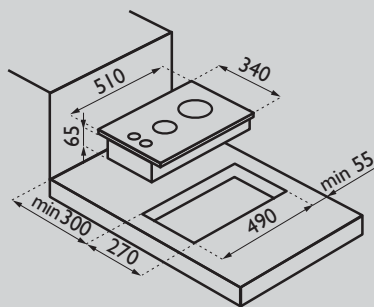


PN34IT2B

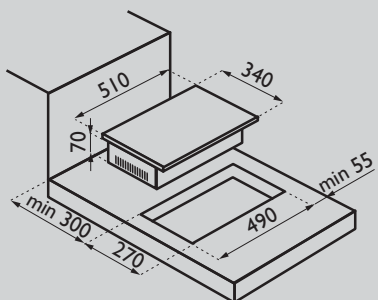


PN34FB

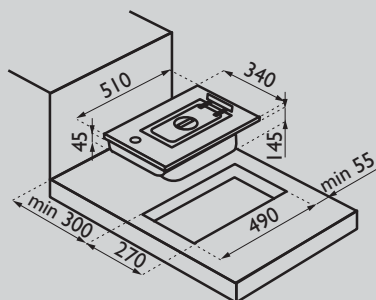


PN34BB

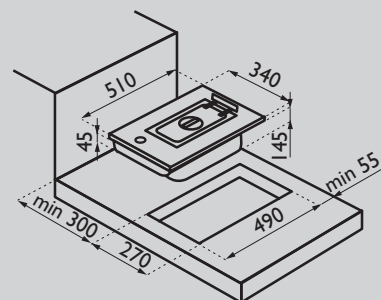


PSIX12G6VC

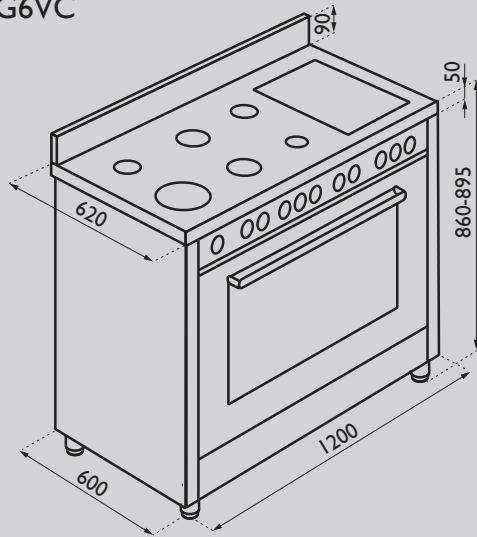


PI...12GE5VC
NIX12GM5VC
DI...12EE5VC

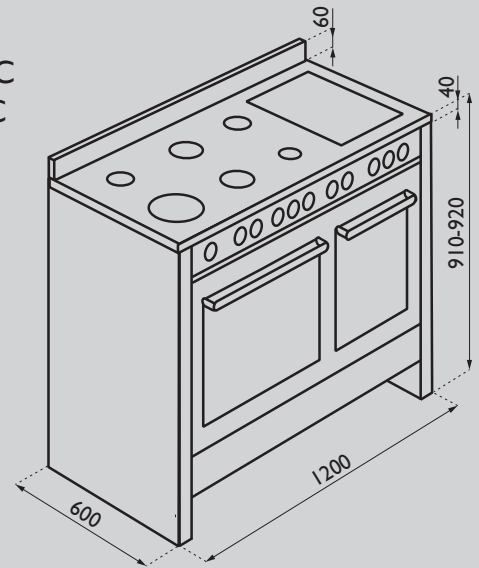


PIXI6G5VC

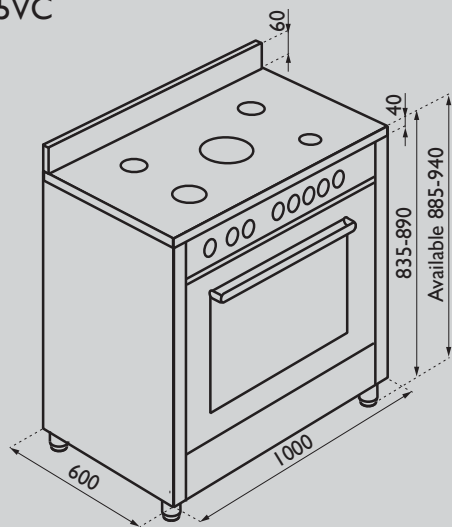


P3...96G5VE
NG3X96G5VC
N3X96G5VE
D3...96M5VE

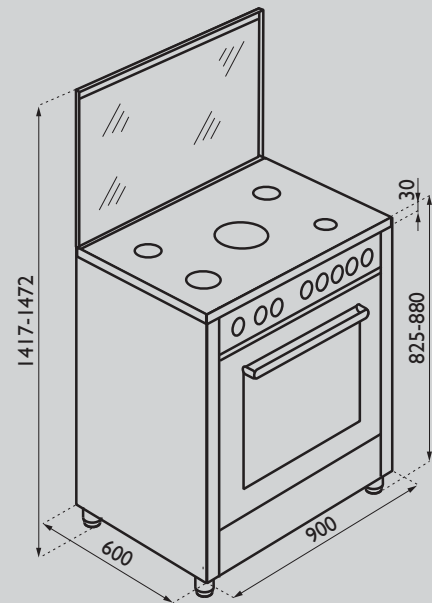


PGIC96M5VC
PIR96MM5VC
PI...96G5VC
NGIX96G5VC
NIX96EEVTC
NIX96M5VC
DI...96EE5VC
DI...96E5VC

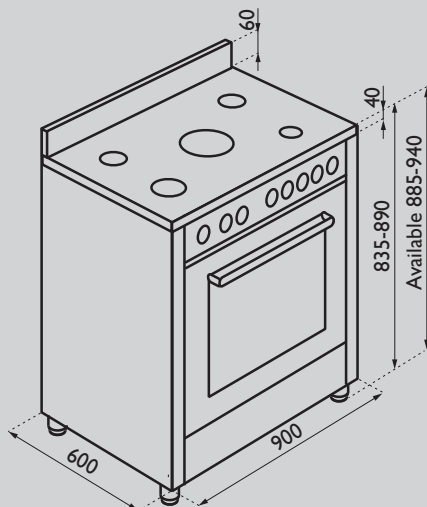


P2...96E5VC
PP...X96G5VC
N2X96G5VC
D2...96G5VC

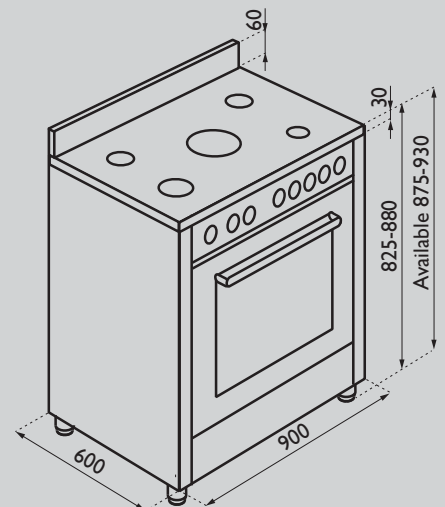


P3...85G5VE
N3X85M5VE
D3...85M5VE

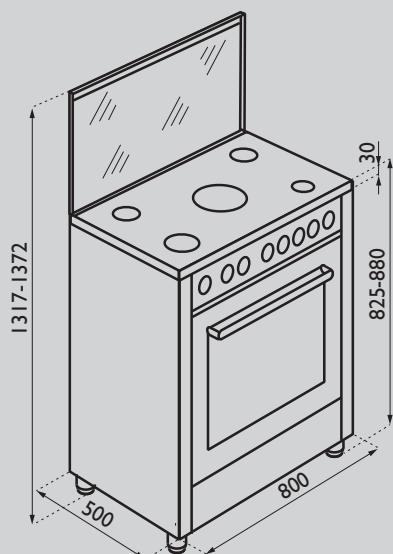


PIX86E5VC

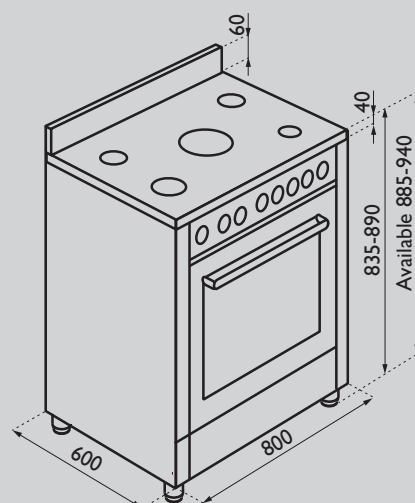


P2...85M5VE
N2X85E5VE
D2...85G5VE

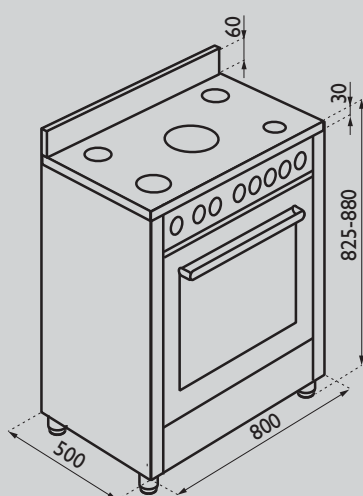


PIX76E5VC
NIX76M5VC

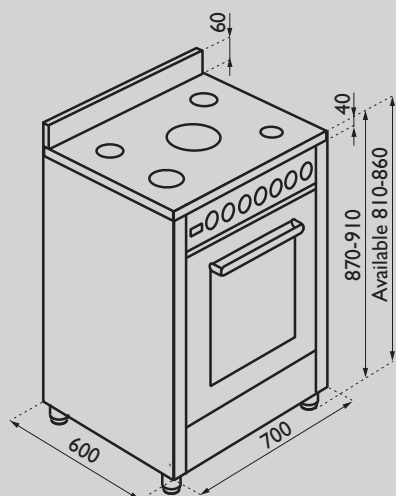


PI66M4VC
NIX66EVC
DI66M4VC

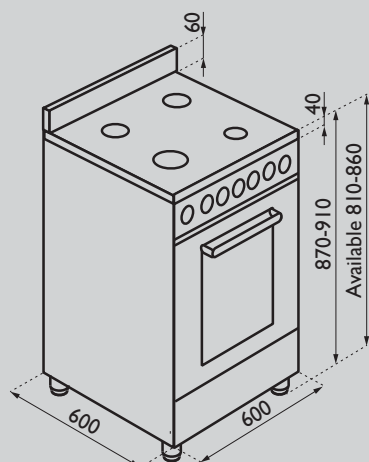


P2X66E4VC
N2X66M4VC
D2...66E4VC

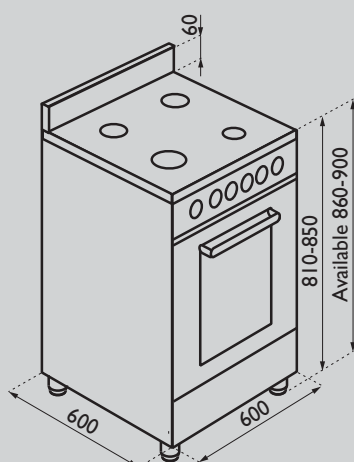


P3...66G4VE
N3X66G4VE
D3...66G4VE

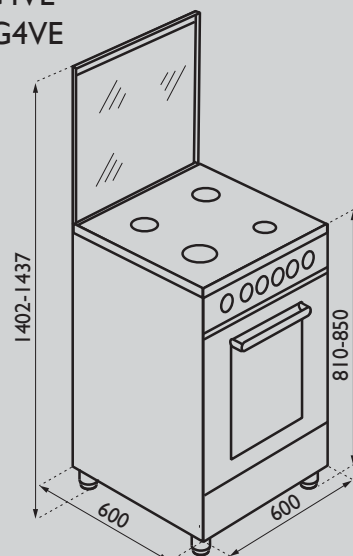


CPI90

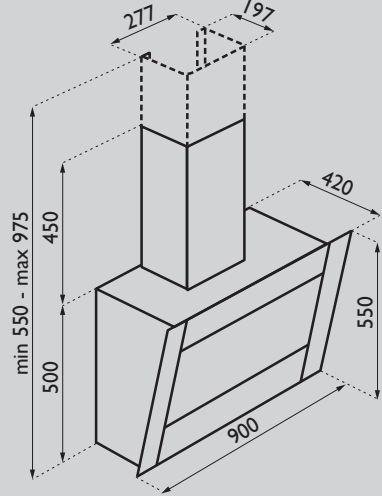


CPI60

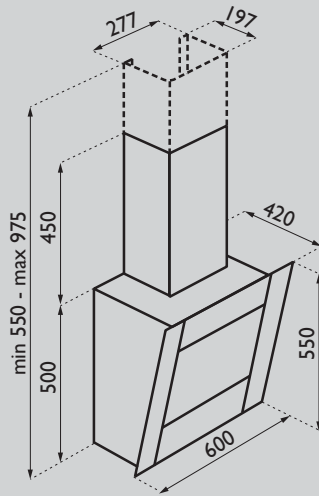


CP212

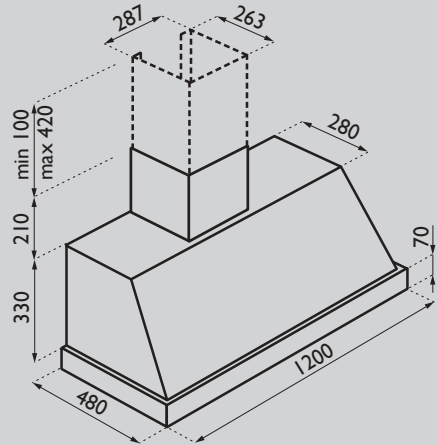

CP290

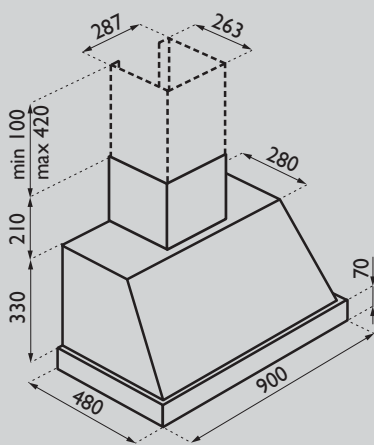


CP260

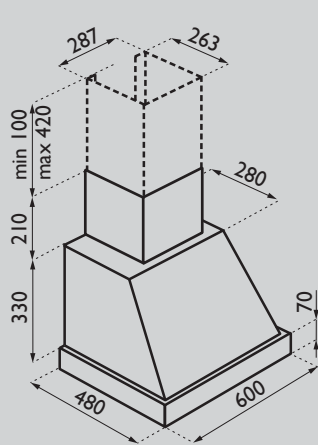

CP312

CD112


CD312

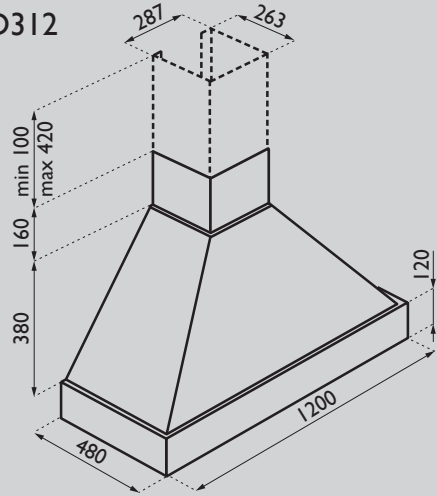

CP390

CD190


CD390

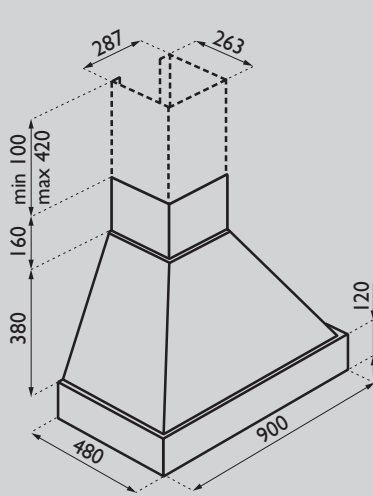


CP360

CD160


CD360

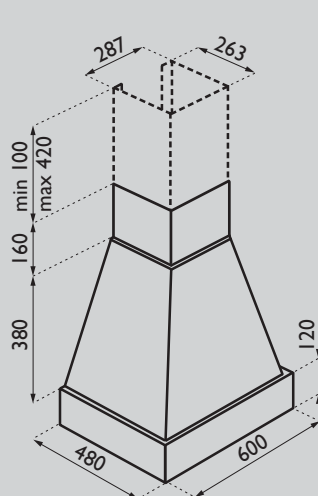


CN112
CN212
CN312

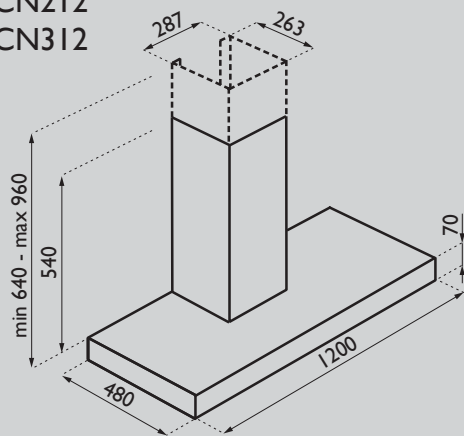


CN190
CN290
CN390

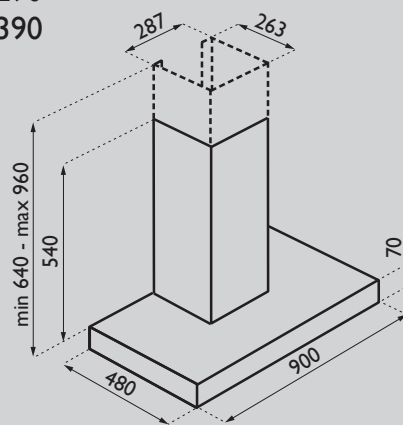


CN160
CN260
CN360

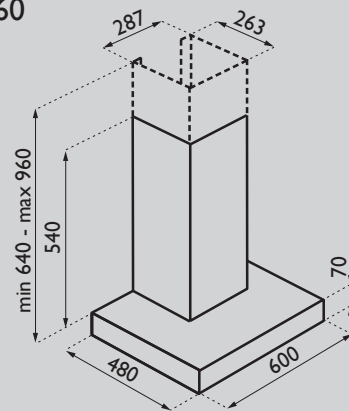


CD212

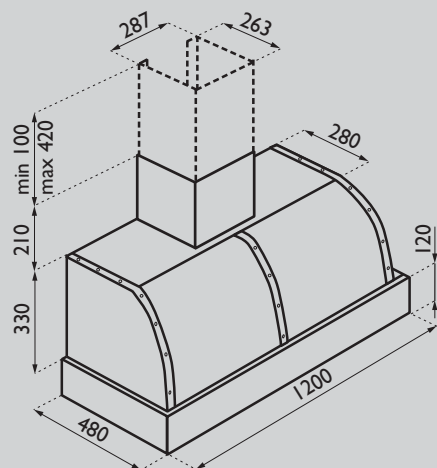

CD290

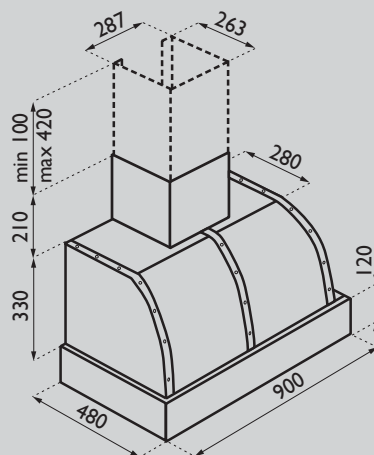

CD260

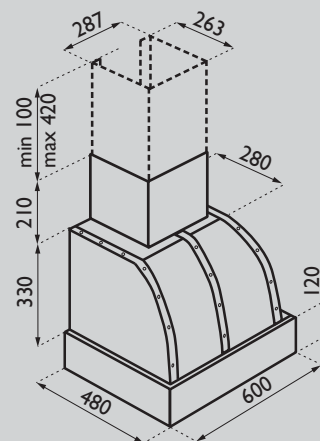

Tecnogas thanks Gianni Contini for his availability and his legacy.

The information in this catalogue should be considered reliable except for any involuntary errors in technical accuracy or printing errors. The colours of the products shown should be regarded as purely indicative and not binding, due to the technical limitations in reproduction and printing. With the intention of continuously improving the products and services offered, Tecno reserves the right to make any changes to the features, colours, parts and supply procedures, without prior notice. Tecno cannot be held responsible for any malfunctioning and damage caused by its own products if they have not been correctly installed as indicated in the instruction manuals. Tecnogas brand and logo are registered trademarks and belong exclusively to Tecno Italy.



These Tecnogas appliances are proudly designed and handcrafted in Italy
Tecno S.p.A., S.P. 63R n. 111, 42044 Gualtieri (RE), Italy
T. +39 0522 222 011 – F. +39 0522 222 171
info@tecnogas.it – tecnogas.it